

HTU20D Digital Humidity Temp Sensor



MEAS | MEAS HTU

[View on TE.com >](#)

Sensors > Humidity Sensors > Humidity Sensor Components

HTU20D(F) is a digital humidity sensor with temperature output.



Humidity Sensor Component Product Type: **RHT**

Supply Voltage (Peak): **3.8 V**

Current Consumption: **.014 mA**

Humidity Operating Range: **0 - 100 %RH**

Operating Temperature Range: **-40 - 125 °C**

HTU20D(F) is a digital relative humidity sensor (RH sensor) with temperature output.

Setting the standard in terms of size and intelligence, it is embedded in a reflow solderable Dual Flat No leads (DFN) package with a small 3 x 3 x 0.9 mm foot print. This sensor provides calibrated, linearized signals in digital, I²C format. HTU20D(F) digital humidity sensors are dedicated humidity and temperature plug and play transducers for OEM applications where reliable and accurate measurements are needed. Direct interface with a micro-controller is made possible with the module for humidity and temperature digital outputs. These low power sensor are designed for high volume and cost sensitive applications with tight space constraints. Every sensor is individually calibrated and tested. Lot identification is printed on the sensor and an electronic identification code is stored on the chip - which can be read out by command. Low battery can be detected and a checksum improves communication reliability. The resolution of these digital humidity sensor can be changed by command (8/12bit up to 12/14bit for RH/T). With TE improvements and miniaturization of this sensor, the performance-to-price ratio has been improved - and eventually, any device should benefit from the cutting edge energy saving operation mode.

Benefits


- DFN type package
- Relative Humidity and Temperature Digital Output, I²C interface
- Fully calibrated
- Lead free sensor, reflow solderable
- Low power consumption
- Fast response time
- Full interchangeability with no calibration required in standard conditions
- Instantaneous desaturation after long periods in saturation phase
- Compatible with automatized assembly processes, including Pb free and reflow processes
- Individual marking for compliance to stringent traceability requirements

Applications

- Home Appliance
- Medical
- Printers
- Humidifier
- Multimedia: Smartphone, Tablet

HTU21 Humidity Temperature Sensor

Learn how the HTU21 Humidity Temperature Sensors maintain constant conditions to increase efficiency and reduce waste in appliances like refrigerators.

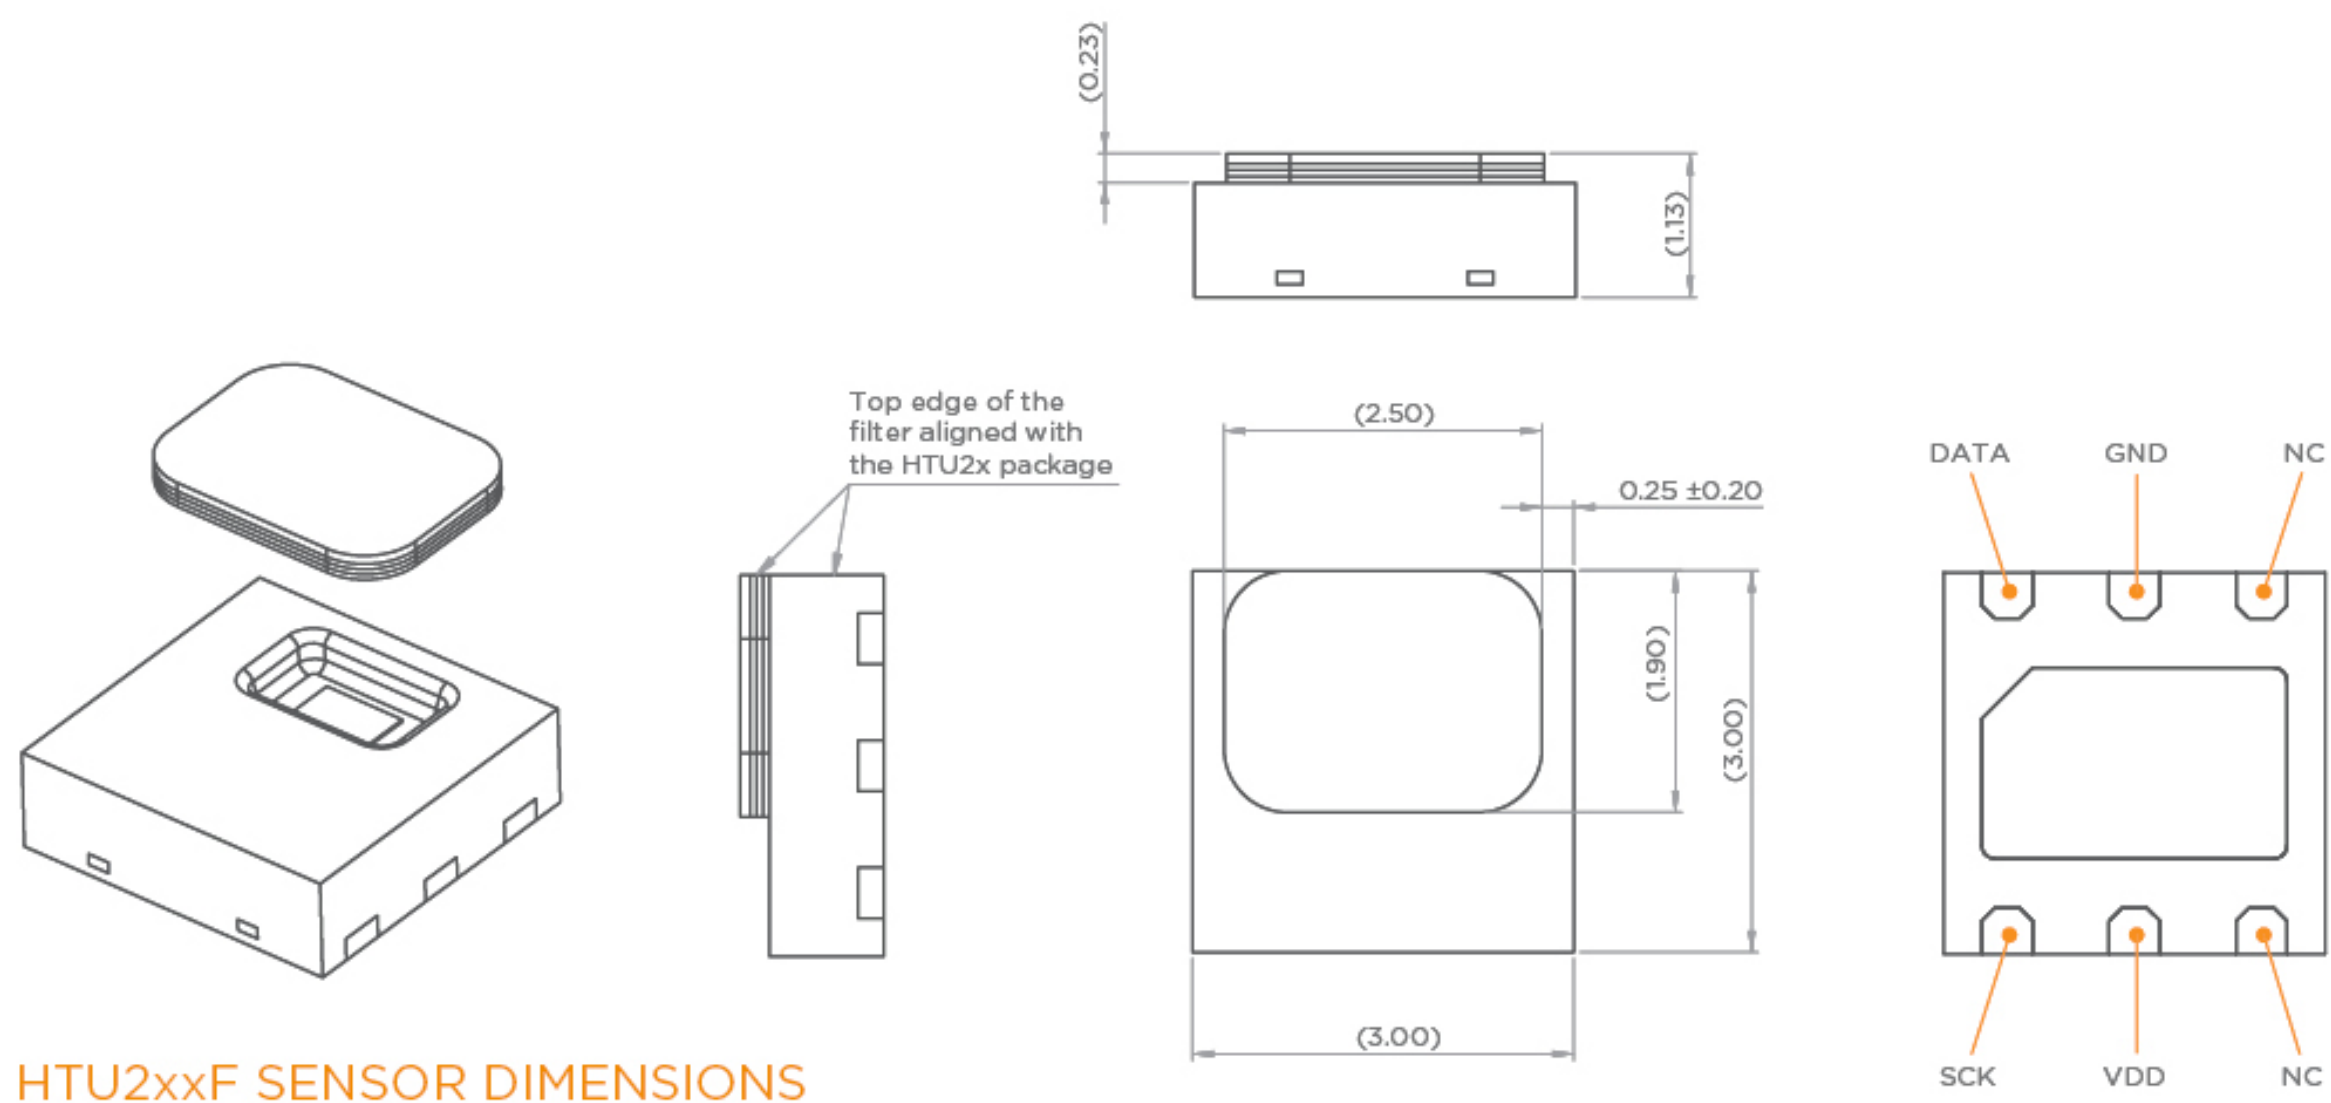

Features

Product Type Features

Humidity Sensor Component Product Type	RHT
--	-----

Humidity Sensor Component Sensor Type	Digital
---------------------------------------	---------

Electrical Characteristics

Supply Voltage (Peak) (V)	3.8
---------------------------	-----

Current Consumption (mA)	.014
--------------------------	------

Usage Conditions

Humidity Operating Range (%RH)	0 - 100
--------------------------------	---------

Operating Temperature Range (°C)	-40 - 125
----------------------------------	-----------

Operating Temperature Range (°F)	-40 - 257
----------------------------------	-----------

Reference Number

TE Internal Number	CAT-HSC0002
--------------------	-------------

SEE PRODUCTS ON NEXT PAGE

Products (1 of 1)



I.C 20D RH/T DIGITAL B400



HTU20DF RH/T SENSOR IC B400



HTU20D RH/T SENSOR



HTU20DF RH/T SENSOR W. FILTER

TE Part #	HPP845E034R4	HPP845E134R4	HPP845E034	HPP845E134
EU RoHS Directive 2011/65 /EU	EU RoHS Compliant	EU RoHS Compliant	EU RoHS Compliant	EU RoHS Compliant
EU ELV Directive 2000/53/EC	EU ELV Compliant	EU ELV Compliant	EU ELV Compliant	EU ELV Compliant
Product Families	MEAS	MEAS	MEAS	MEAS
Series	MEAS HTU	MEAS HTU	MEAS HTU	MEAS HTU

***EU RoHS Directive 2011/65/EU**

These products comply with the substance restrictions of the Restriction on Hazardous Substances Directive 2011/65/EU (RoHS2). The RoHS2 Directive requires that certain electrical and electronic equipment products do not contain mercury, cadmium, hexavalent chromium, PBB, PBDE, lead, DEHP, BBP, DBP and DIBP above defined thresholds. Products indicated as 'Compliant' do not contain any of these substances above the prohibition thresholds. Finished electrical and electronic equipment products will be CE marked as required by the Directive. Components may not be CE marked.

****EU ELV Directive 2000/53/EC**

These products comply with the substance restrictions of the End of Life Vehicles Directive 2000/53/EC (ELV). The ELV Directive requires that materials and components of vehicles do not contain mercury, cadmium, hexavalent chromium, and lead above defined thresholds. Products indicated as 'Compliant' do not contain any of these substances above the prohibition thresholds.

Related Materials

Data Sheet

[HTU20D](#)

English

External Link


[Generic C Driver - HTU20D](#)

Download the HTU20D Generic C driver from Github.

Also in the Series | MEAS HTU



Humidity Sensor Assemblies(4)

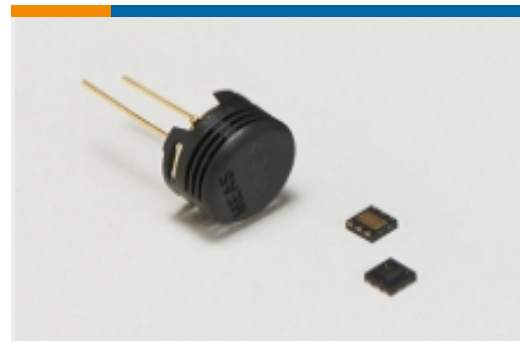

Humidity Sensor Components(22)



Sensor Development Boards and Evaluation Kits(3)