
# SST-48-17/FR/97 <

### RAYCHEM | RAYCHEM SST-SR

TE Internal #: CB5378-000 Black, 3:1, Single Wall Tubing, Shrinks To .5 in [12.7 mm], Irradiated Modified Polyolefin, 1.7 in [43.18 mm] Inner Diameter, RAYCHEM SST-SR

### View on TE.com >

Heat Shrink Tubing



Primary Product Color: Black Wall Type: Single Wall Expanded Inside Diameter (Min): 43.18 mm [ 1.7 in ] Recovered Inside Diameter (Max): 12.7 mm [ .5 in ] Shrink Ratio: 3:1

## Features

## Product Type Features

Wall Type

**E** 

Single Wall

## **Body Features**

Fluid Type	De-Icing Fluid, Hydraulic Fluid, Lubricating Oil, Turbine Fuel
Primary Product Color	Black
Shrink Ratio	3:1
Primary Product Material	Irradiated Modified Polyolefin
Flexibility	Semi-Rigid
Dimensions	
Expanded Inside Diameter (Min)	43.18 mm[1.7 in]
Recovered Inside Diameter (Max)	12.7 mm[.5 in]
Usage Conditions	
Shrink Temperature (Min)	90 °C
Resistance Properties	Moisture
Tubing Flammability Type	Flame-Retardant
Operating Temperature Range	-55 – 110 °C
Recovery Temperature	121 °C

## SST-48-17/FR/97

Black, 3:1, Single Wall Tubing, Shrinks To .5 in [12.7 mm], Irradiated Modified Polyolefin, 1.7 in [43.18 mm] Inner Diameter, RAYCHEM SST-SR



Operation/Application	
Mechanical Resistance	Abrasion, Fluids, Moisture
Product Availability	
Applicable Region	Global
Packaging Features	
Packaging Method	Piece
Other	
Meets Low Outgassing Requirements	No
Product Source	US
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023

(233)

Does not contain REACH SVHC

Not Yet Reviewed for halogen content

Not applicable for solder process capability

### Halogen Content

Solder Process Capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**


## SST-48-17/FR/97

Black, 3:1, Single Wall Tubing, Shrinks To .5 in [12.7 mm], Irradiated Modified Polyolefin, 1.7 in [43.18 mm] Inner Diameter, RAYCHEM SST-SR






# Also in the Series | RAYCHEM SST-SR



# Customers Also Bought

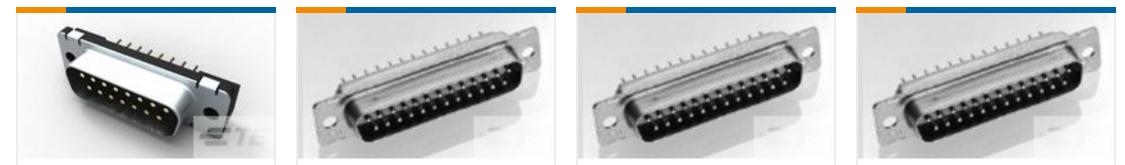



## Documents

Product Drawings

SST-48-17/FR/97

English

Datasheets & Catalog Pages Measuring\_Single\_Wall\_Tubing

English

### SST-48-17/FR/97

Black, 3:1, Single Wall Tubing, Shrinks To .5 in [12.7 mm], Irradiated Modified Polyolefin, 1.7 in [43.18 mm] Inner Diameter, RAYCHEM SST-SR



SST and SST-FR Pages from 9-1773447-9

English

Selecting\_Correct\_Tubing\_1216

English

**Product Specifications** 

Harnessing Customer Specification Report

English

**Product Specification** 

English