# 

TE Internal #: CSH-SGFB-100-UFFR SMA Bulkhead to UMCC Cable Assembly, .33 ft [.1 – 1 m], Black Cable, 6 GHz Operating Frequency, 50 Ω, FEP, 32 AWG, .052 in [1.32 mm] Diameter

### View on TE.com >



Cable Assemblies > RF Cable Assemblies



## Connector Type (End A): UMCC Plug

Jacket Material: FEP

Cable Assembly Length: .1 – 1 m [.33 ft]

Cable Color: Black

Operating Temperature Range: -40 – 90 °C [-40 – 194 °F]

### Features

### **Product Type Features**

Coax Cable Type	1.32 mm
Connector Type (End A)	UMCC Plug
Connector Type (End B)	SMA Plug

## **Configuration Features**

Number of Connectorized Ends	2		
lectrical Characteristics			
Impedance	50 Ω		
Body Features			
Body Plating Material	Gold		
Jacket Material	FEP		
Cable Color	Black		
Contact Features			
Center Contact Plating	Gold		
Dimensions			
Wire Size	32 AWG		
Outside Cable Diameter	1.32 mm[.052 in]		

## CSH-SGFB-100-UFFR

SMA Bulkhead to UMCC Cable Assembly, .33 ft [.1 – 1 m], Black Cable, 6 GHz Operating Frequency, 50  $\Omega$ , FEP, 32 AWG, .052 in [1.32 mm] Diameter



Usage Conditions	
Operating Temperature Range	-40 - 90 °C[-40 - 194 °F]
Operation/Application	
Shielded	Yes
Operating Frequency	6 GHz
Other	
Dielectric Material	FEP
Cable Assembly Length	.1 – 1 m[.33 ft]
Product Compliance For compliance documentation, visit the product page on TE.com>	
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	.1 – 1 m[.33 ft] Compliant with Exemptions Not Yet Reviewed
Product Compliance For compliance documentation, visit the product page on TE.com>	Compliant with Exemptions
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Compliant with Exemptions Not Yet Reviewed
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	Compliant with Exemptions Not Yet Reviewed Restricted Materials Above Threshold Current ECHA Candidate List: JUNE 2023 (235)

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

## **Compatible Parts**


## CSH-SGFB-100-UFFR

SMA Bulkhead to UMCC Cable Assembly, .33 ft [.1 – 1 m], Black Cable, 6 GHz Operating Frequency, 50  $\Omega$ , FEP, 32 AWG, .052 in [1.32 mm] Diameter





## Customers Also Bought

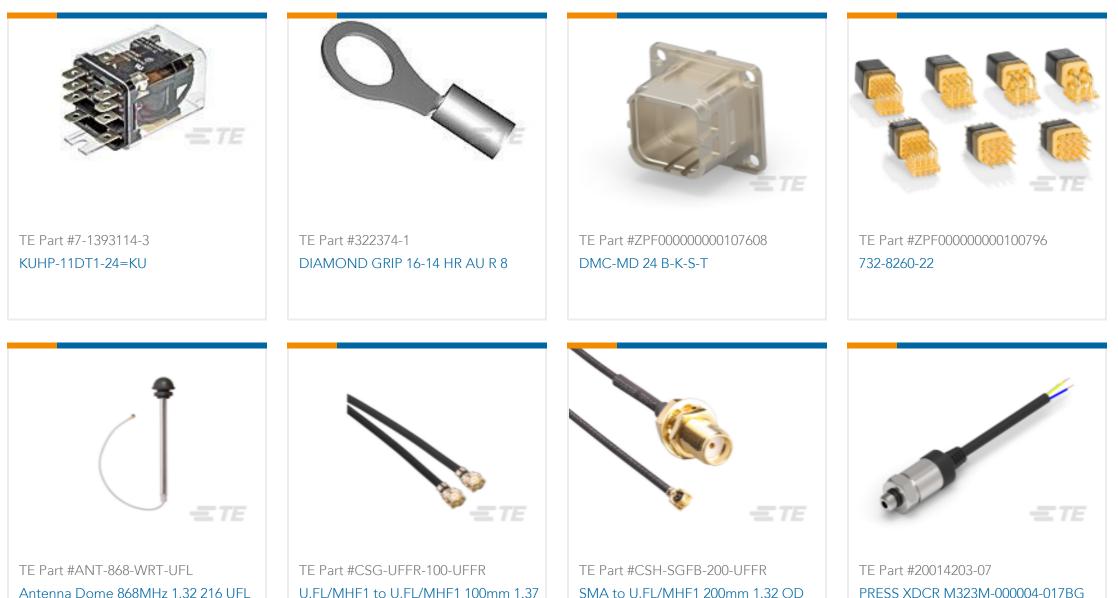

	OD	SWA to 0.1 EAWITH 1 20011111 1.32 OD
TE Part #1931732-2 4kV QK COMBP TO THERAPY PCB	TE Part #384268-E STVB/2 16 M AB 0374 4-00 0606 * 8360	
	247	

## Documents

Product Drawings SMA to U.FL/MHF1 100mm 1.32 OD

English

## Datasheets & Catalog Pages SMA Bulkhead Jack to U.FL Plug Cable Assembly English