

DEUTSCH | DEUTSCH DRC

TE Internal #: DRC26-40SA Housing for Female Terminals, Wire-to-Wire, 40 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DRC Housings



Connector System: Wire-to-Wire

Number of Positions: 40

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 4.42 mm [.174 in]

Sealable: Yes

All DEUTSCH DRC Housings (112)

Features

Product Type Features

Mixed & Hybrid Connector

No

Connector Shape

Rectangular

Connector System	Wire-to-Wire	
Connector & Housing Type	Housing for Female Terminals	
Sealable	Yes	
Connector & Contact Terminates To	Wire & Cable	
Primary Locking Feature	Contact Retainer	
Configuration Features		
Number of Positions	40	
Number of Rows	4	
Electrical Characteristics		
Operating Voltage	250 VAC	
Nominal Voltage Architecture	24 V, 48 V	
Body Features		
Cable Exit Angle	180°	
Primary Product Color	Black	
Connector & Keying Code	A	

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 40 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC



Contact Features

Contact Size	Size 20
Contact Type	Socket
Mating Pin Diameter	1.02 mm[.04 in]
Contact Current Rating (Max)	7.5 A
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	Add By Accessory
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	PAGF
Centerline (Pitch)	4.42 mm[.174 in]
Dimensions	
Connector Height	32.64 mm[1.285 in]
Product Width	68.58 mm[2.7 in]
Product Length	27.94 mm[1.1 in]
Row-to-Row Spacing	4.42 mm[.174 in]
Compatible Insulation Diameter Range	1.02 – 2.41 mm[.04 – .095 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Degree of Protection	Not Tested
Agency/Standard	SAE J2030
UL Flammability Rating	20mm Flame Test per Standard UL-94
Packaging Features	
Packaging Quantity	125

Housing for Female Terminals, Wire-to-Wire, 40 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC



Packaging Method	Box			
Other				
Serviceable	Yes			
Connector Position Assurance Capable	No			
Product Compliance For compliance documentation, visit the product page on TE.com>				
EU RoHS Directive 2011/65/EU	Compliant			
EU ELV Directive 2000/53/EC	Compliant			
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE			

Halogen Content

BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.

Octamethylcyclotetrasiloxane (D4) (.4% in

Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic

2023 (235)

location.

SVHC > Threshold:

Component Part) Article Safe Usage Statements:


Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Housing for Female Terminals, Wire-to-Wire, 40 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC



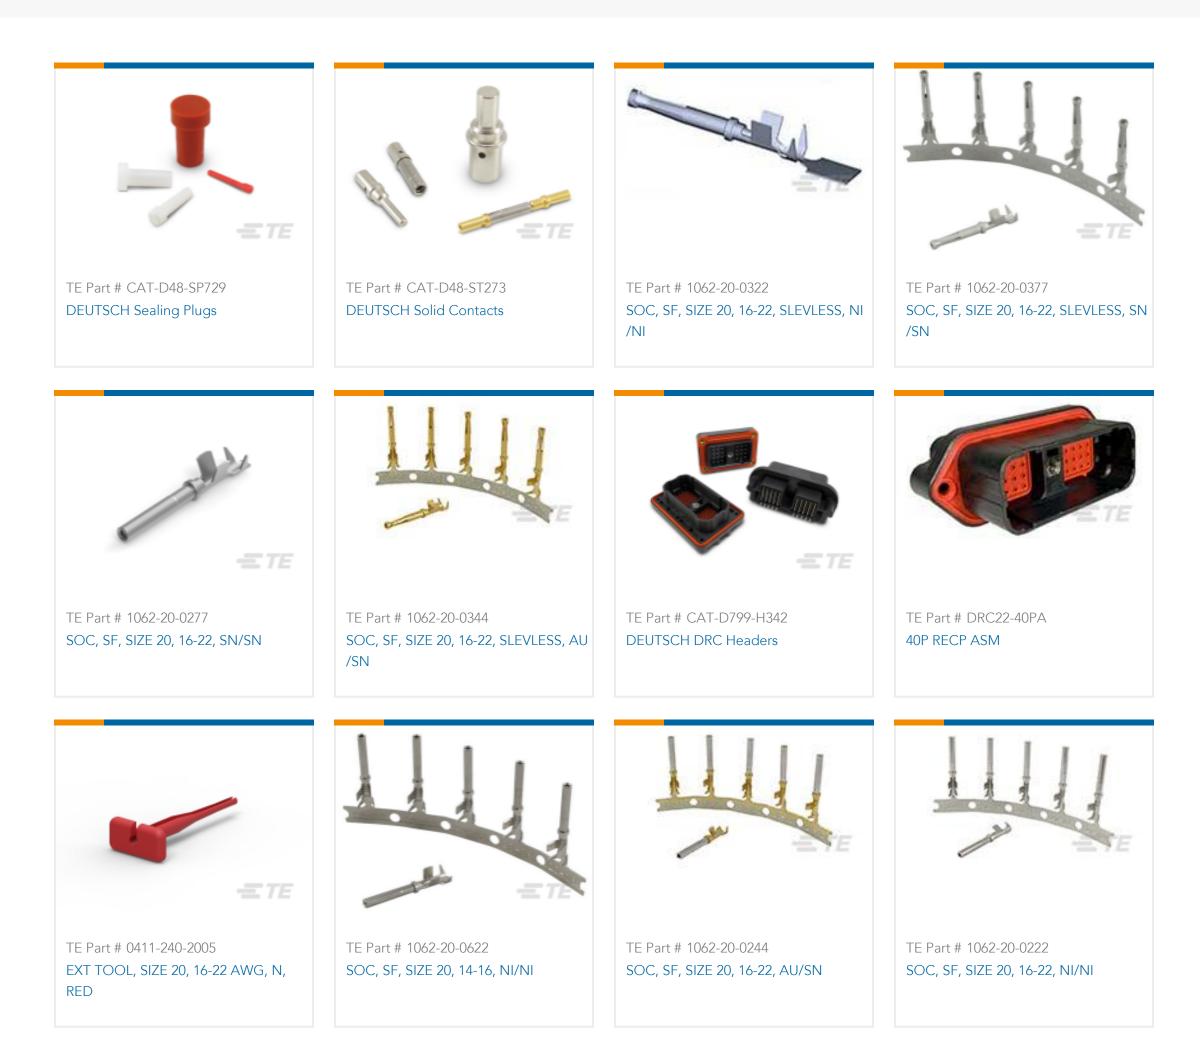

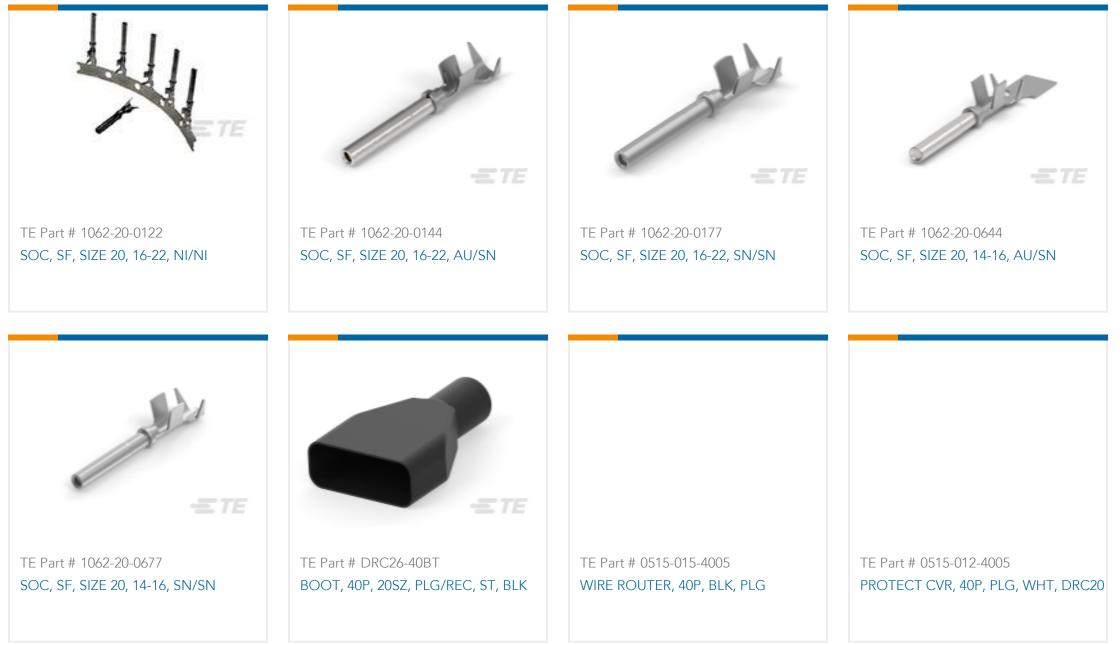

Also in the Series DEUTSCH DRC

Housing for Female Terminals, Wire-to-Wire, 40 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC







PCB Headers & Receptacles(44)

Customers Also Bought



TE Part #1-35115-0 SPLICE,N CE 22-14	TE Part #2106154-1 Assem, Jumper, Board to Board, Screw Dow	TE Part #DRC22-40PA 40P RECP ASM	TE Part #HDP26-24-23PN DEUTSCH HDP20 Housings
P.B.	ETE		
TE Part #1443997-1 BASE ASSEMBLY, 60 POSITION, BB	TE Part #K1161213 Battery Disconnector 35-224-130-R-900	TE Part #2103172-9 Plug Assembly, 250A, MSD	TE Part #1587987-9 RECEPTACLE ASSEMBLY, 250A, MSD



Documents

Housing for Female Terminals, Wire-to-Wire, 40 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC



Product Drawings PLG, 40P, BLK, A

English

CAD Files

Customer View Model

ENG_CVM_CVM_DRC26-40SA_99.2d_dxf.zip

English

3D PDF 3D

Customer View Model ENG_CVM_CVM_DRC26-40SA_99.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DRC26-40SA_99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

Product Specifications Product Specification

English

Product Specification

English

Agency Approvals

UL Report

English