

#### DEUTSCH | DEUTSCH DRC

TE Internal #: DRC26-50S04 Housing for Female Terminals, Wire-to-Wire, 50 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DRC Housings



Connector System: Wire-to-Wire

Number of Positions: 50

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 4.42 mm [.174 in]

Sealable: Yes

All DEUTSCH DRC Housings (112)

### Features

#### Product Type Features

Mixed & Hybrid Connector

No

Connector Shape

Rectangular

Connector System	Wire-to-Wire				
Connector & Housing Type	Housing for Female Terminals				
Sealable	Yes				
Connector & Contact Terminates To	Wire & Cable				
Primary Locking Feature	Contact Retainer				
Configuration Features					
Number of Positions	50				
Number of Rows	5				
Electrical Characteristics					
Operating Voltage	250 VAC				
Nominal Voltage Architecture	24 V, 48 V				
Body Features					
Cable Exit Angle	180°				
Primary Product Color	Black				
Connector & Keying Code	04				

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 50 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC



#### **Contact Features**

Contact Size	Size 20
Contact Type	Socket
Mating Pin Diameter	1.02 mm[.04 in]
Contact Current Rating (Max)	7.5 A
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	With
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
lousing Features	
Housing Material	PAGF
Centerline (Pitch)	4.42 mm[.174 in]
Dimensions	
Connector Height	36.45 mm[1.435 in]
Product Width	68.58 mm[2.7 in]
Product Length	32.36 mm[1.274 in]
Row-to-Row Spacing	4.42 mm[.174 in]
Compatible Insulation Diameter Range	1.02 – 2.41 mm[.04 – .095 in]
Jsage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Signal
ndustry Standards	
Degree of Protection	Not Tested
Agency/Standard	SAE J2030
UL Flammability Rating	20mm Flame Test per Standard UL-94
Packaging Features	
Packaging Quantity	125
Packaging Quantity	125

Housing for Female Terminals, Wire-to-Wire, 50 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC



Packaging Method	Box			
Other				
Serviceable	Yes			
Connector Position Assurance Capable	No			
Product Compliance For compliance documentation, visit the product page on TE.com>				
EU RoHS Directive 2011/65/EU	Compliant			
EU ELV Directive 2000/53/EC	Compliant			
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold			
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC			
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.			
Solder Process Capability	Not reviewed for solder process capability			

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**



Housing for Female Terminals, Wire-to-Wire, 50 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC



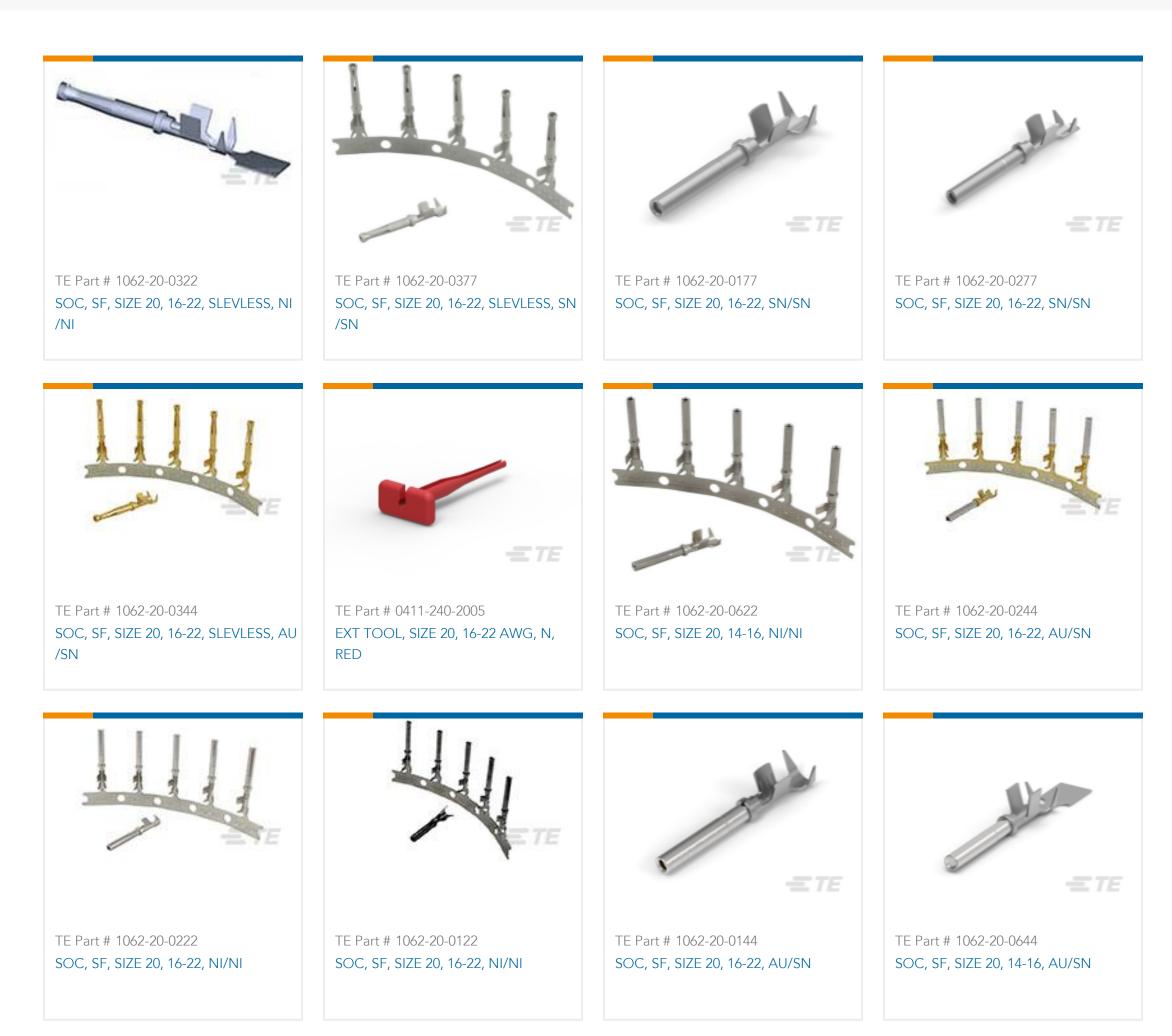

=TE			
TE Part # 1062-20-0677 SOC, SF, SIZE 20, 14-16, SN/SN	TE Part # DRC26-50BT BOOT, 50P, 20SZ, PLG/REC, ST, BLK	TE Part # 0515-018-5005 PROTECT CVR, 38/50/60P, PLG, WHT, DRC20	TE Part # 1060-20-0677 PIN, SF, SIZE 20, 14-16, SN/SN

# Also in the Series | DEUTSCH DRC



Housing for Female Terminals, Wire-to-Wire, 50 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC





# Customers Also Bought



TE Part #WHDS-24-2

250 FASTON HSG. REC. 1P BLACK	PLG, 60P, BLK, N, 06	STRAIN RELIEF, HD30, 24SZ, ST	STRAIN RELIEF, HD30, 24SZ, RA

TE Part #WHDS-24-1

### Documents

TE Part #926539-3

Product Drawings

PLG, 50P, BLK, N, 04

English

#### CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_DRC26-50S04\_99\_c-drc26-50s04-99.2d\_dxf.zip

TE Part #DRC26-60S06

English

Customer View Model

ENG\_CVM\_CVM\_DRC26-50S04\_99\_c-drc26-50s04-99.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_DRC26-50S04\_99\_c-drc26-50s04-99.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 50 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC



Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

**Product Specifications** 

**Product Specification** 

English

Product Environmental Compliance

Product Compliance

English

**Product Compliance** 

English

Agency Approvals

UL Report

English