

#### DEUTSCH | DEUTSCH DRC

TE Internal #: DRC26-50S05 Housing for Female Terminals, Wire-to-Wire, 50 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DRC Housings



Connector System: Wire-to-Wire

Number of Positions: 50

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 4.42 mm [.174 in]

Sealable: Yes

All DEUTSCH DRC Housings (112)

### Features

### Product Type Features

Mixed & Hybrid Connector

No

Connector Shape

Rectangular

| Connector System                  | Wire-to-Wire                 |  |
|-----------------------------------|------------------------------|--|
| Connector & Housing Type          | Housing for Female Terminals |  |
| Sealable                          | Yes                          |  |
| Connector & Contact Terminates To | Wire & Cable                 |  |
| Primary Locking Feature           | Contact Retainer             |  |
| Configuration Features            |                              |  |
| Number of Positions               | 50                           |  |
| Number of Rows                    | 5                            |  |
| Electrical Characteristics        |                              |  |
| Operating Voltage                 | 250 VAC                      |  |
| Nominal Voltage Architecture      | 24 V, 48 V                   |  |
| Body Features                     |                              |  |
| Cable Exit Angle                  | 180°                         |  |
| Primary Product Color             | Black                        |  |
| Connector & Keying Code           | 05                           |  |

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 50 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC



## **Contact Features**

| act Size                          | Size 20                            |
|-----------------------------------|------------------------------------|
| act Type                          | Socket                             |
| ng Pin Diameter                   | 1.02 mm[.04 in]                    |
| act Current Rating (Max)          | 7.5 A                              |
| anical Attachment                 |                                    |
| ninal Position Assurance          | No                                 |
| n Relief                          | With                               |
| ng Alignment Type                 | Keyed                              |
| ng Alignment                      | With                               |
| nector Mounting Type              | Cable Mount (Free-Hanging)         |
| ng Features                       |                                    |
| sing Material                     | PAGF                               |
| erline (Pitch)                    | 4.42 mm[.174 in]                   |
| nsions                            |                                    |
| nector Height                     | 36.45 mm[1.435 in]                 |
| uct Width                         | 68.58 mm[2.7 in]                   |
| uct Length                        | 32.36 mm[1.274 in]                 |
| to-Row Spacing                    | 4.42 mm[.174 in]                   |
| patible Insulation Diameter Range | 1.02 – 2.41 mm[.04 – .095 in]      |
| Conditions                        |                                    |
| rating Temperature (Max)          | 125 °C[257 °F]                     |
| rating Temperature Range          | -55 – 125 °C[-67 – 257 °F]         |
| ition/Application                 |                                    |
| uit Application                   | Signal                             |
| ry Standards                      |                                    |
| ree of Protection                 | Not Tested                         |
| ncy/Standard                      | SAE J2030                          |
| lammability Rating                | 20mm Flame Test per Standard UL-94 |
| ging Features                     |                                    |
| aging Quantity                    | 125                                |
| aging Quantity                    | 125                                |

Housing for Female Terminals, Wire-to-Wire, 50 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC



| Packaging Method  | Box   |  |
|---|---|--|
| Other   |   |  |
| Serviceable   | Yes   |  |
| Connector Position Assurance Capable  | No  |  |
| Product Compliance<br>For compliance documentation, visit the product page on TE.com> |   |  |
| EU RoHS Directive 2011/65/EU  | Compliant   |  |
| EU ELV Directive 2000/53/EC   | Compliant   |  |
| China RoHS 2 Directive MIIT Order No 32, 2016   | No Restricted Materials Above Threshold   |  |
| EU REACH Regulation (EC) No. 1907/2006  | Current ECHA Candidate List: JUNE 2023<br>(235)<br>Candidate List Declared Against: JUNE<br>2023 (235)<br>Does not contain REACH SVHC |  |
| Halogen Content   | Not Low Halogen - contains Br or Cl > 900<br>ppm.   |  |
| Solder Process Capability   | Not reviewed for solder process capability  |  |

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**



Housing for Female Terminals, Wire-to-Wire, 50 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC



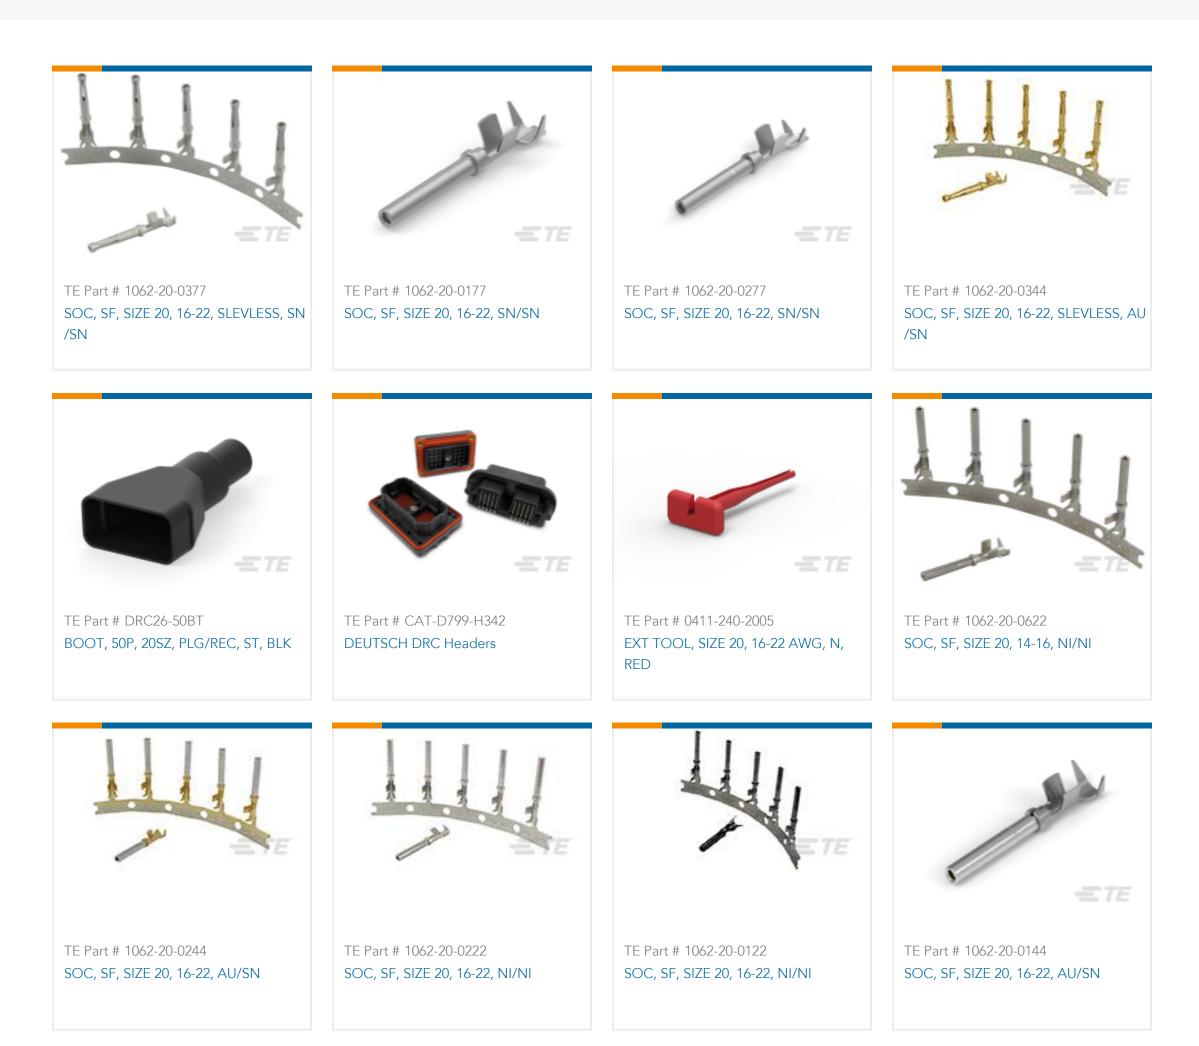

| =TE  | = TE   |   |  |
|--|--|---|--|
| TE Part # 1062-20-0644<br>SOC, SF, SIZE 20, 14-16, AU/SN | TE Part # 1062-20-0677<br>SOC, SF, SIZE 20, 14-16, SN/SN | TE Part # 0515-018-5005<br>PROTECT CVR, 38/50/60P, PLG, WHT,<br>DRC20 | TE Part # 1060-20-0677<br>PIN, SF, SIZE 20, 14-16, SN/SN |

# Also in the Series | DEUTSCH DRC



Housing for Female Terminals, Wire-to-Wire, 50 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC





## Customers Also Bought



## Documents

Product Drawings

## PLG, 50P, BLK, N, 05

English

## CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_DRC26-50S05\_99\_c-drc26-50s05-99.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_DRC26-50S05\_99\_c-drc26-50s05-99.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_DRC26-50S05\_99\_c-drc26-50s05-99.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Housing for Female Terminals, Wire-to-Wire, 50 Position, .174 in [4.42 mm] Centerline, Sealable, Black, Wire & Cable, Signal, DEUTSCH DRC



Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

**Product Specifications** 

**Product Specification** 

English

Product Environmental Compliance

Product Compliance

English

**Product Compliance** 

English

Agency Approvals

UL Report

English