DT04-12PA-LE21 ACTIVE

DEUTSCH | DEUTSCH DT

TE Internal #: DT04-12PA-LE21 Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DT Receptacle Connectors



Connector System: Wire-to-Wire

Number of Positions: **12**

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 9.12 mm [.359 in]

Sealable: Yes

All DEUTSCH DT Receptacle Connectors (241)

Features

Product Type Features

Mixed & Hybrid Connector

Connector Shape

No

Rectangular



Connector System	Wire-to-Wire		
Connector & Housing Type	Housing for Male Terminals		
Sealable	Yes		
Connector & Contact Terminates To	Wire & Cable		
Primary Locking Feature	Integrated in Housing		
Configuration Features			
Blank Cavity Position	0		
Connector Modification	Sealed Flange, End Cap, One Piece Design		
Connector Seal Code	E Seal		
Number of Positions	12		
Number of Rows	2		
Electrical Characteristics			
Operating Voltage	250 VAC		
Nominal Voltage Architecture	12 V, 24 V, 48 V		
Body Features			

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



Cable Exit Angle	180°	
Primary Product Color	Gray	
Connector & Keying Code	A	
Contact Features		
Contact Size	Size 16	
Contact Type	Pin	
Mating Pin Diameter	1.59 mm[.063 in]	
Contact Current Rating (Max)	13 A	
Mechanical Attachment		
Terminal Position Assurance	Yes	
Strain Relief	Add By Accessory	
Mating Alignment Type	Keyed	
Mating Alignment	With	
Connector Mounting Type	Panel Mount	
Housing Features		
Housing Material	PA GF	

Dimensions

Connector Height	44.07 mm[1.735 in]		
Product Width	88.34 mm[3.478 in]		
Product Length	52.37 mm[2.062 in]		
Row-to-Row Spacing	4.45 mm[.175 in]		
Compatible Insulation Diameter Range	1.35 – 3.05 mm[.053 – .12 in]		
Usage Conditions			
Operating Temperature (Max)	125 °C[257 °F]		
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]		
Operation/Application			
Circuit Application	Power & Signal		
Industry Standards			
Degree of Protection	IP68, IP6K9K		
Agency/Standard	SAE J2030		
UL Flammability Rating	12mm Flame Test per Standard UL-94		

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



Packaging Features

Packaging Quantity	100
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5%

Halogen Content

Solder Process Capability

in Component Part)

Decamethylcyclopentasiloxane (D5) (.5% in

Component Part)

Article Safe Usage Statements:

Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900 ppm.

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT




Compatible Parts

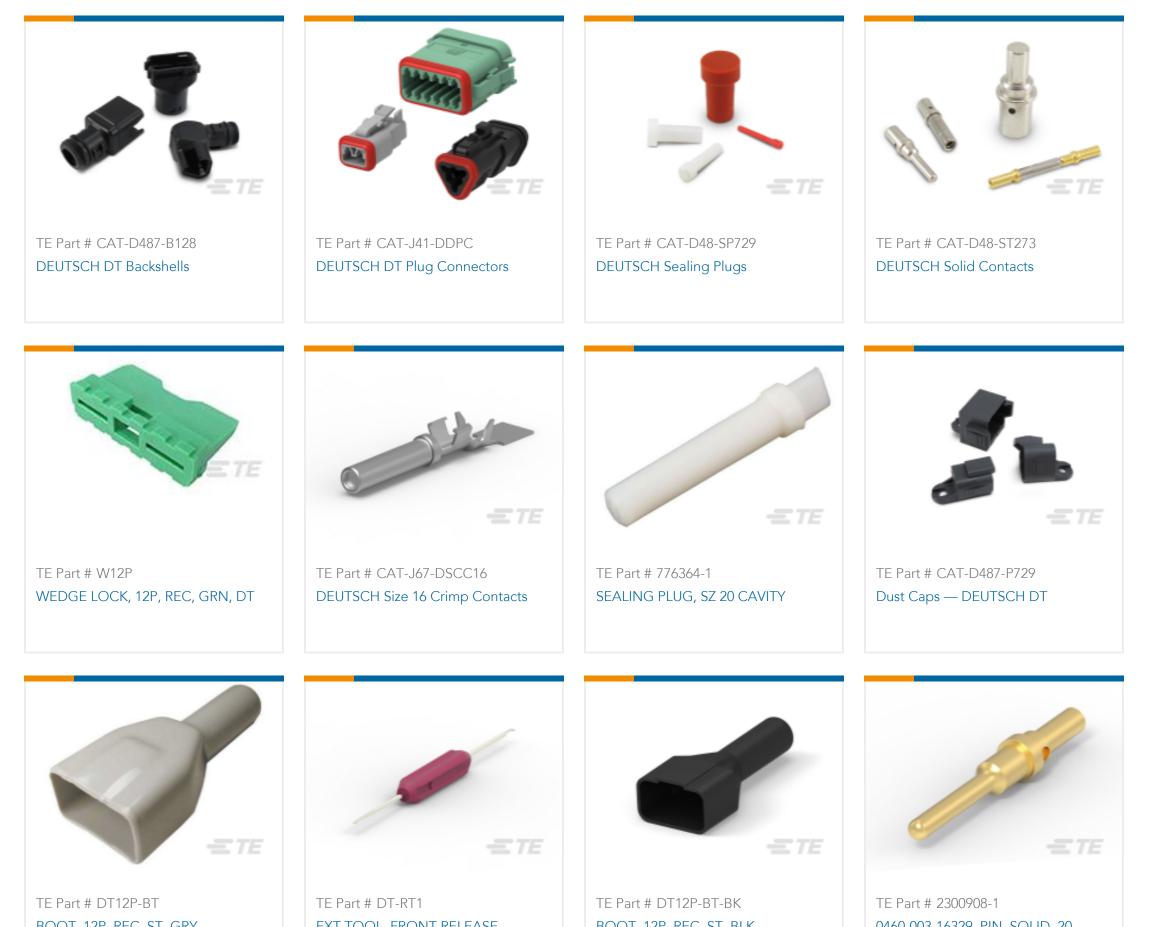


BOOT, 12P, REC, ST, GRY	EXT TOOL, FRONT RELEASE	BOOT, 12P, REC, ST, BLK	0460-003-16329, PIN, SOLID, 20- 24AWG, AU	
TE	ETE			
TE Part # DT12P-BT-EN BOOT, 12P, REC, ST, LONG, GRY	TE Part # DT12P-BT-YW BOOT, 12P, REC, ST, YEL	TE Part # DT06-12SA-CE18 PLG,12P, GRY, E, SEAL RET,ENH KEY, RCAP,A	TE Part # CAT-D48-SFT273 DEUTSCH Stamped and Formed Contacts	

Also in the Series | DEUTSCH DT

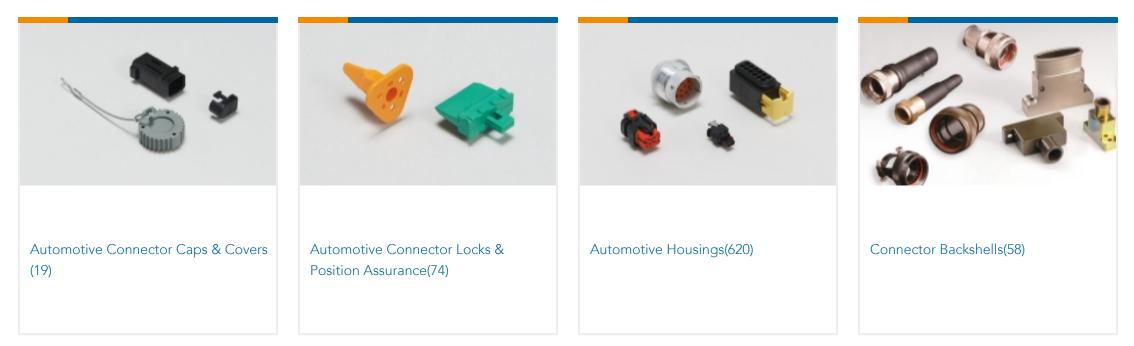

Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



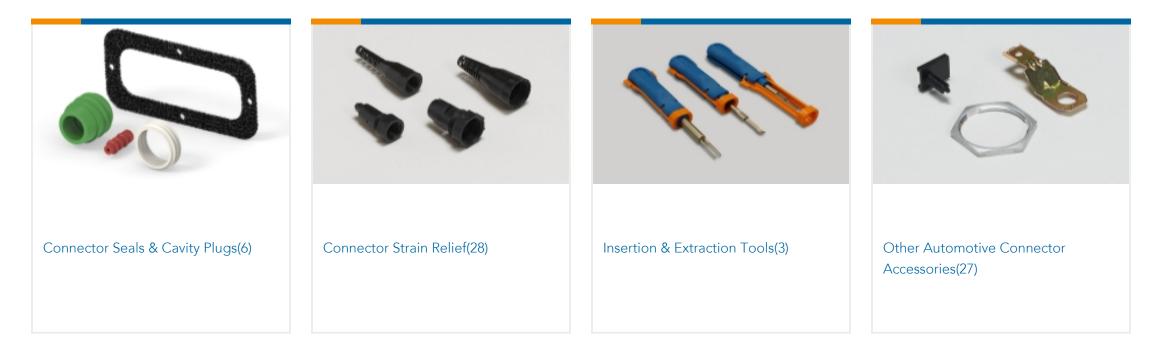



Customers Also Bought



REC, 4P, BLK, N, CAP	REC, 12P, BLK, E, FLANGE, B	TH/.025 CONNECTOR SYSTEM, HOUSING	COVER,FOR 22POS
ETE	ETE	ETE	
TE Part #1318332-1 .040 SEALED REC CONT	TE Part #2600031-1 4CCT BLACK PLUG W/SMALL SEAL	TE Part #925467-1 POS-MATE REC HSG 4P	TE Part #DT06-3S-KIT 3WY PL W/WEG

TE Part #DT04-3P-KIT-W-PINS DT3 WY KT WI

Documents

Housing for Male Terminals, Wire-to-Wire, 12 Position, .359 in [9.12 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, DEUTSCH DT



Product Drawings REC, 12P, GRY, E, FLANGE, A

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_DT04-12PA-LE21_99_c-dt04-12pa-le21-99.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_DT04-12PA-LE21_99_c-dt04-12pa-le21-99.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DT04-12PA-LE21_99_c-dt04-12pa-le21-99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English