
DT04-6P-CL06 <

DEUTSCH | DEUTSCH DT

TE Internal #: DT04-6P-CL06 Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DT Receptacle Connectors

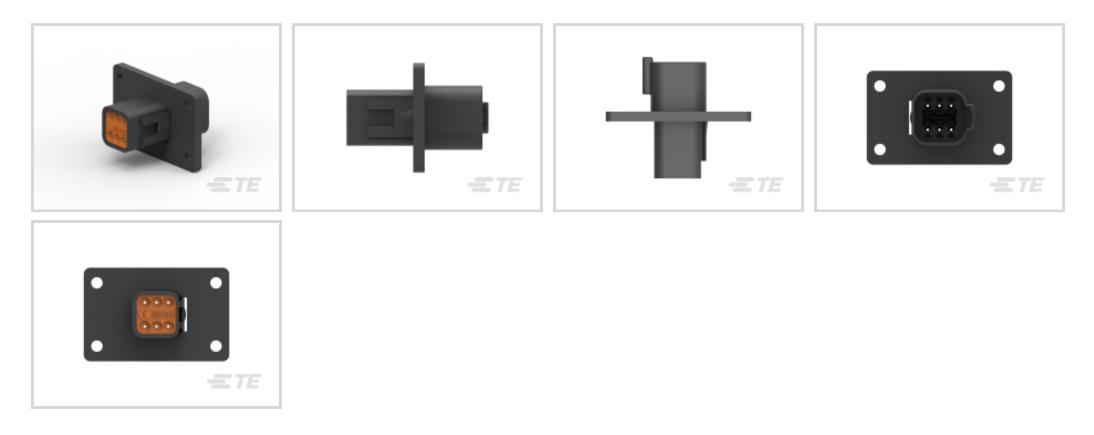

Connector System: Wire-to-Wire

Number of Positions: 6

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 9.12 mm [.359 in]

Sealable: Yes

All DEUTSCH DT Receptacle Connectors (241)



Features

Product Type Features

Mixed & Hybrid Connector	No	
Connector Shape	Rectangular	
Connector System	Wire-to-Wire	
Connector & Housing Type	Housing for Male Terminals	
Sealable	Yes	
Connector & Contact Terminates To	Wire & Cable	
Primary Locking Feature	Integrated in Housing	
Configuration Features		
Blank Cavity Position	0	
Connector Modification	Welded Flange	
Connector Seal Code	E Seal	
Number of Positions	6	
Number of Rows	3	

C For support call+1 800 522 6752

09/19/2023 03:43PM | Page 1

Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



Electrical Characteristics	
Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Black
Contact Features	
Contact Size	Size 16
Contact Type	Pin
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Panel Mount

Housing Features

Housing Material	PA GF
Centerline (Pitch)	9.12 mm[.359 in]
Dimensions	
Connector Height	54.99 mm[2.165 in]
Product Width	35.51 mm[1.398 in]
Product Length	45.92 mm[1.808 in]
Row-to-Row Spacing	4.45 mm[.175 in]
Compatible Insulation Diameter Range	1.35 – 3.05 mm[.053 – .12 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal

Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



Industry Standards

Degree of Protection	IP68, IP6K9K
Agency/Standard	SAE J2030
UL Flammability Rating	12mm Flame Test per Standard UL-94
Packaging Features	
Packaging Quantity	250
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023

Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC

(235)

Not Low Halogen - contains Br or Cl > 900 ppm.

Not reviewed for solder process capability

Halogen Content

Solder Process Capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



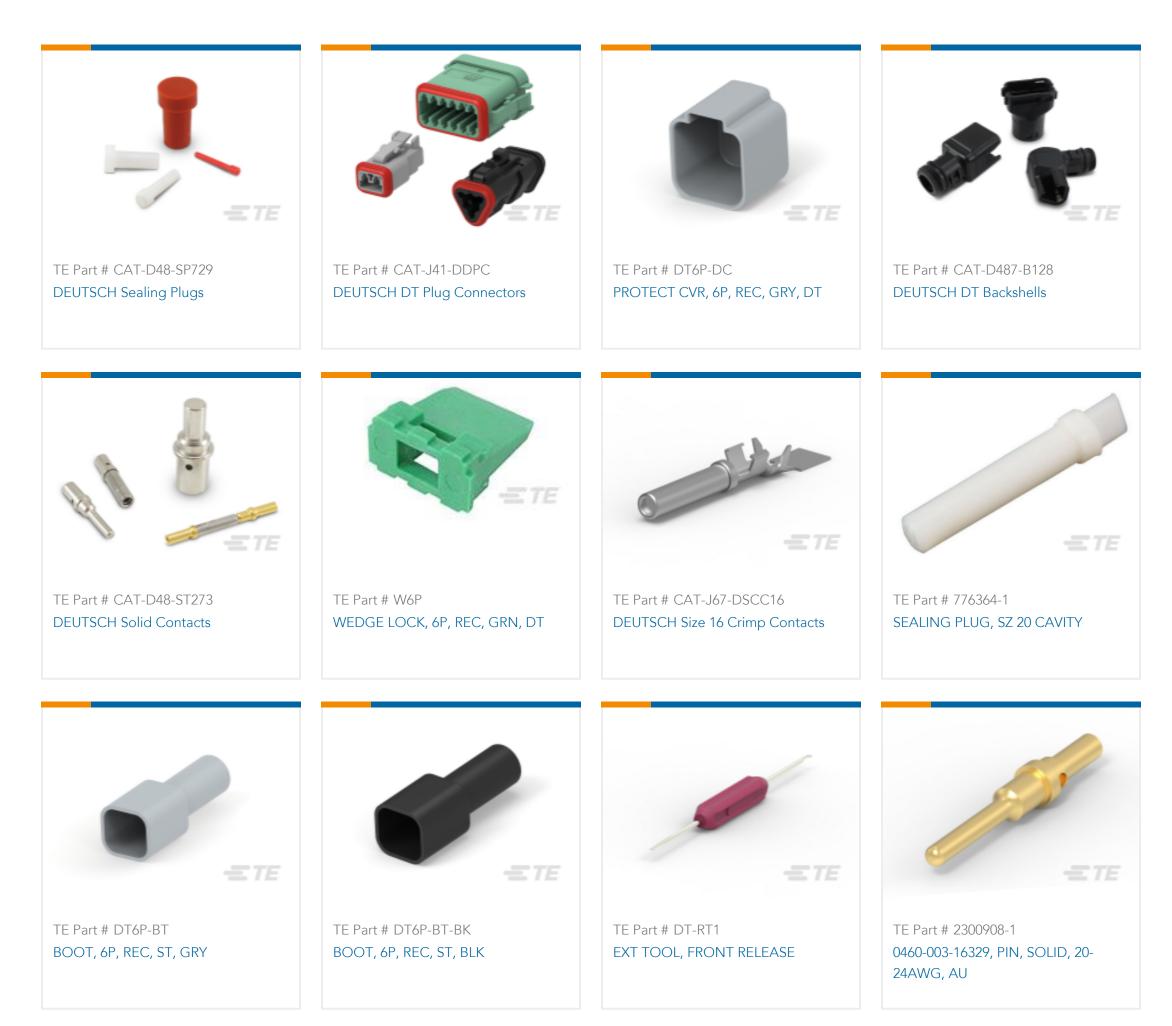


TE Part # DT06-6S-CE04 PLG, 6P, GRY, E, XCAP	TE Part # CAT-D48-SFT273 DEUTSCH Stamped and Formed Contacts	TE Part # DT6P-BT-YW BOOT, 6P, REC, ST, YEL

Also in the Series DEUTSCH DT

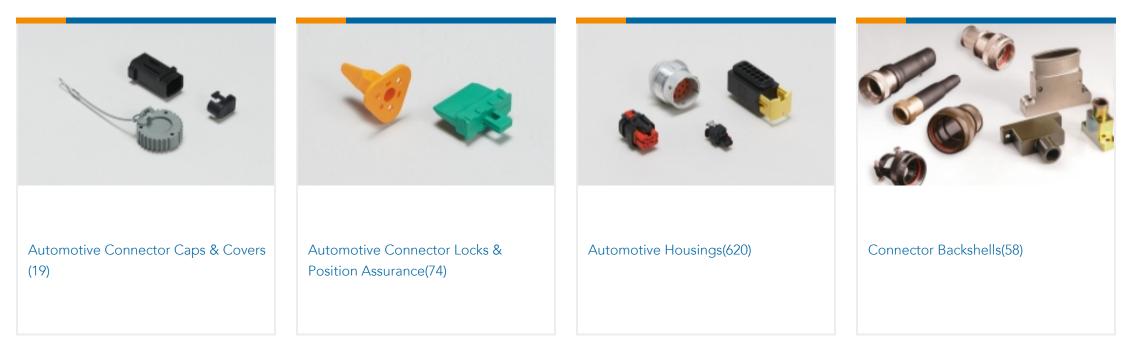

Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



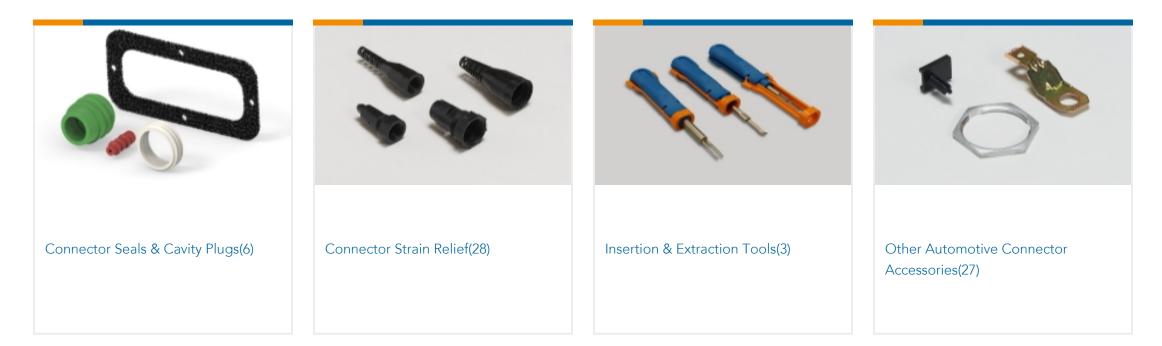



Customers Also Bought




DEUTSCH DT Receptacle Connectors

WEDGE LOCK, 6P, REC, GRN, DT

REC, 18P, BLK, N, RNG, 8/12/16, P

CAP, CPC, SIZE 13 RECP, ORANGE

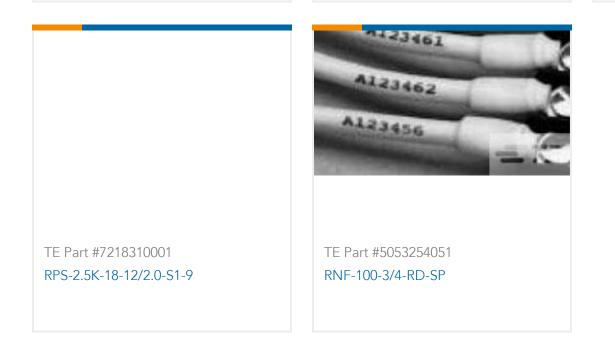

Documents

Product Drawings
REC, 6P, BLK, E, FLANGE
English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_DT04-6P-CL06_A.2d_dxf.zip

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



English

Customer View Model ENG_CVM_CVM_DT04-6P-CL06_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DT04-6P-CL06_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications Application Specification

English

Agency Approvals UL Report

English