DT04-6P-CL09 <

DEUTSCH | DEUTSCH DT

TE Internal #: DT04-6P-CL09 Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DT Receptacle Connectors



Connector System: Wire-to-Wire

Number of Positions: 6

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 9.12 mm [.359 in]

Sealable: Yes

All DEUTSCH DT Receptacle Connectors (241)

Features

Product Type Features

Mixed & Hybrid Connector

No

Connector Shape

Rectangular

Connector System	Wire-to-Wire	
Connector & Housing Type	Housing for Male Terminals	
Sealable	Yes	
Connector & Contact Terminates To	Wire & Cable	
Primary Locking Feature	Integrated in Housing	
Configuration Features		
Blank Cavity Position	0	
Connector Modification	Sealed Flange, End Cap	
Number of Positions	6	
Number of Rows	3	
Electrical Characteristics		
Operating Voltage	250 VAC	
Nominal Voltage Architecture	12 V, 24 V, 48 V	
Body Features		
Cable Exit Angle	180°	

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



Contact Features	
Contact Size	Size 16
Contact Type	Pin
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Panel Mount
Housing Features	
Housing Material	PAGF
Centerline (Pitch)	9.12 mm[.359 in]
Dimensions	
Connector Height	54.74 mm[2.155 in]
Product Width	30.99 mm[1.22 in]
Product Length	47.45 mm[1.868 in]
Row-to-Row Spacing	4.45 mm[.175 in]
Compatible Insulation Diameter Range	1.35 – 3.05 mm[.053 – .12 in]
Jsage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
ndustry Standards	
Degree of Protection	IP68, IP6K9K
Agency/Standard	SAE J2030

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



Packaging Quantity	200
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in

Halogen Content

Solder Process Capability

Component Part)

Article Safe Usage Statements:

Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900 ppm.

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



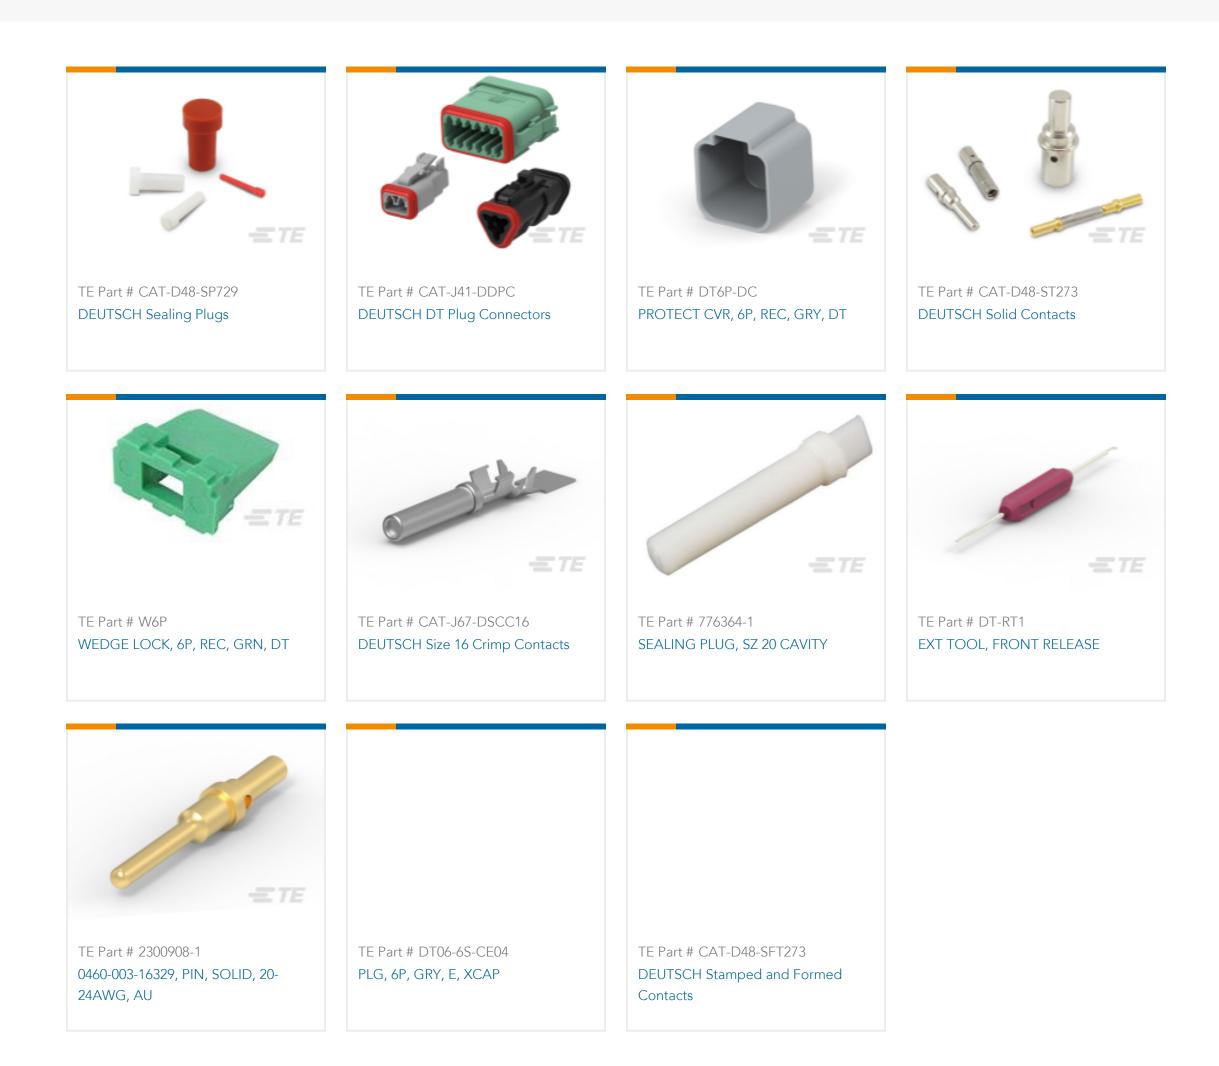

Also in the Series | DEUTSCH DT

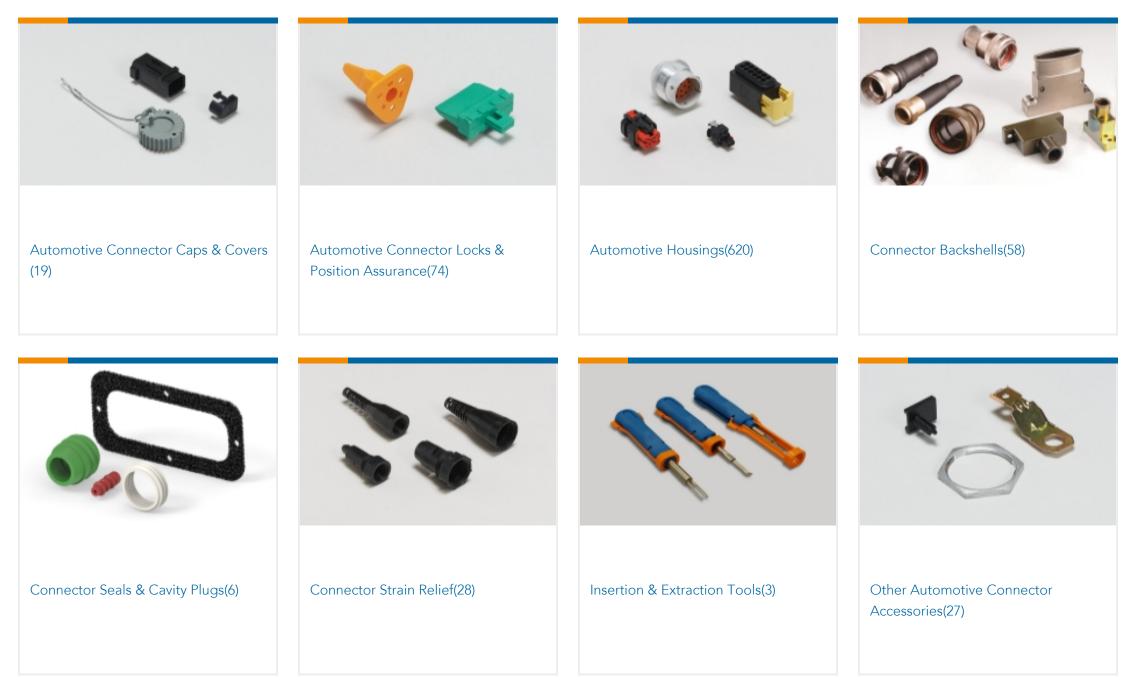

Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT





Customers Also Bought



RPC-M12-MR-8CON-PVC-0.5SH	70MM2 BATTTERY CLMP ASSMB NEGATIVE	REC, 16P, BLK, E, THD, 12, S	LWB-101-3.0(50)	
TE Part #DT04-12PA-930C REC, 12P, BLK, N, SEALED FLANGE, A				
Documents				
Product Drawings REC, 6P, BLK, E, CAP, FLAN	GE			
English	-			
CAD Files 3D PDF				

3D

Customer View Model

ENG_CVM_CVM_DT04-6P-CL09_99_c-dt04-6p-cl09-99.2d_dxf.zip

Housing for Male Terminals, Wire-to-Wire, 6 Position, .359 in [9.12 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, DEUTSCH DT



English Customer View Model ENG_CVM_CVM_DT04-6P-CL09_99_c-dt04-6p-cl09-99.3d_igs.zip English Customer View Model ENG_CVM_CVM_DT04-6P-CL09_99_c-dt04-6p-cl09-99.3d_stp.zip English By downloading the CAD file I accept and agree to the Terms and Conditions of use. Datasheets & Catalog Pages CONNECTOR SELECTOR

English

Product Specifications Application Specification

English

Agency Approvals UL Report

English