DTM04-12PA-L012 ACTIVE


DEUTSCH | DEUTSCH DT, DEUTSCH DTM

TE Internal #: DTM04-12PA-L012 Housing for Male Terminals, Wire-to-Wire / Wire-to-Panel, 12 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Hybrid

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DTM Housings



Connector System: Wire-to-Panel, Wire-to-Wire

Number of Positions: **12**

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 4.19 mm [.165 in]

Sealable: Yes

All DEUTSCH DTM Housings (109)

Features

Product Type Features

Mixed & Hybrid Connector

Connector Shape	Rectangular	
Connector System	Wire-to-Panel, Wire-to-Wire	
Connector & Housing Type	Housing for Male Terminals	
Sealable	Yes	
Connector & Contact Terminates To	Wire & Cable	
Primary Locking Feature	Integrated in Housing	
Configuration Features		
Blank Cavity Position	0	
Connector Modification	Welded Flange	
Number of Positions	12	
Number of Rows	2	
Electrical Characteristics		
Operating Voltage	250 VAC	
Nominal Voltage Architecture	12 V, 24 V, 48 V	
Body Features		

Housing for Male Terminals, Wire-to-Wire / Wire-to-Panel, 12 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Hybrid



Cable Exit Angle	180°	
Primary Product Color	Gray	
Connector & Keying Code	A	
Contact Features		
Contact Size	Size 20	
Contact Type	Pin	
Mating Pin Diameter	1.02 mm[.04 in]	
Contact Current Rating (Max)	7.5 A	
Mechanical Attachment		
Terminal Position Assurance	Yes	
Strain Relief	Add By Accessory	
Mating Alignment Type	Keyed	
Mating Alignment	With	
Connector Mounting Type	Panel Mount	
Housing Features		
Housing Material	PA GF	
Centerline (Pitch)	4.19 mm[.165 in]	

Dimensions

Connector Height	35.56 mm[1.4 in]	
Product Width	55.12 mm[2.17 in]	
Product Length	43.69 mm[1.72 in]	
Row-to-Row Spacing	7.11 mm[.28 in]	
Compatible Insulation Diameter Range	1.35 – 3.05 mm[.053 – .12 in]	
Usage Conditions		
Operating Temperature (Max)	125 °C[257 °F]	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]	
Operation/Application		
Circuit Application	Power & Signal	
Industry Standards		
Degree of Protection	IP68, IP6K9K	
Agency/Standard	SAE J2030	
UL Flammability Rating	20mm Flame Test per Standard UL-94	

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire / Wire-to-Panel, 12 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Hybrid



Packaging Features

Packaging Quantity	200
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5%

	in Component Part)	
	Decamethylcyclopentasiloxane (D5) (.5% in	
	Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not reviewed for solder process capability	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Housing for Male Terminals, Wire-to-Wire / Wire-to-Panel, 12 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Hybrid



Compatible Parts =TE -TE =TE -TE TE Part # CAT-D485-CH8172 TE Part # CAT-D48-SP729 TE Part # 1028-034-1205 TE Part # CAT-D485-W416 DEUTSCH Sealing Plugs DEUTSCH DTM Wedgelocks DEUTSCH DTM Housings BKSHL, 12P, BLK, REC, ST, NW 13/17 -TE = TE TE Part # CAT-D48-ST273 TE Part # 1011-052-1205 TE Part # DTM12P-BT TE Part # DTM12P-BT-BK DEUTSCH Solid Contacts SEAL RET, 12P, GRY, DTM, A BOOT, 12P, REC, ST, GRY BOOT, 12P, REC, ST, BLK

PIN, SF, SIZE 20, 16-22, SN/SN



DEUTSCH Stamped and Formed

Contacts


=TE

TE Part # DTM12P-DC PROTECT CVR, 12P, REC, GRY, DTM	TE Part # DT-RT1 EXT TOOL, FRONT RELEASE	TE Part # 1060-20-0622 PIN, SF, SIZE 20, 14-16, NI/NI	TE Part # 1060-20-0144 PIN, SF, SIZE 20, 16-22, AU/SN
A A A A A A A A A A A A A A A A A A A	A de de la d		ETE
TE Part # 1060-20-0222 PIN, SF, SIZE 20, 16-22, NI/NI	TE Part # 1060-20-0122 PIN, SF, SIZE 20, 16-22, NI/NI	TE Part # 1060-20-0244 PIN, SF, SIZE 20, 16-22, AU/SN	TE Part # 1060-20-0177 PIN, SF, SIZE 20, 16-22, SN/SN
ETE			
TE Part # 1060-20-0277	TE Part # CAT-D48-SFT273		

Also in the Series DEUTSCH DT

Housing for Male Terminals, Wire-to-Wire / Wire-to-Panel, 12 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Hybrid




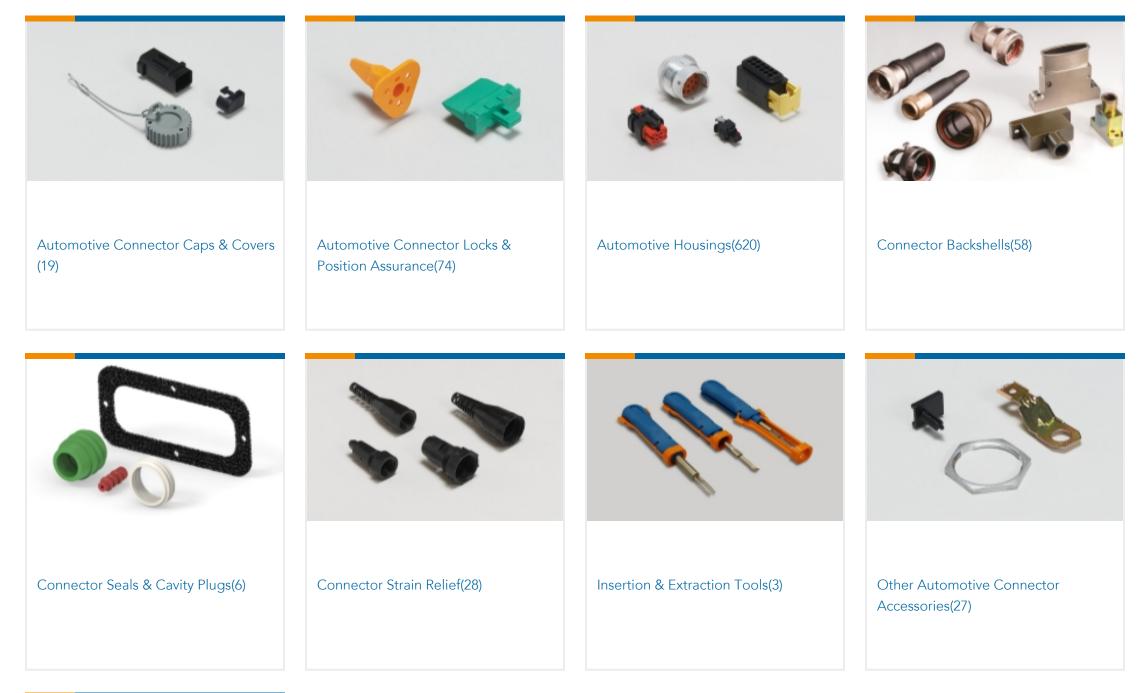



PCB Headers & Receptacles(103)


Also in the Series DEUTSCH DTM

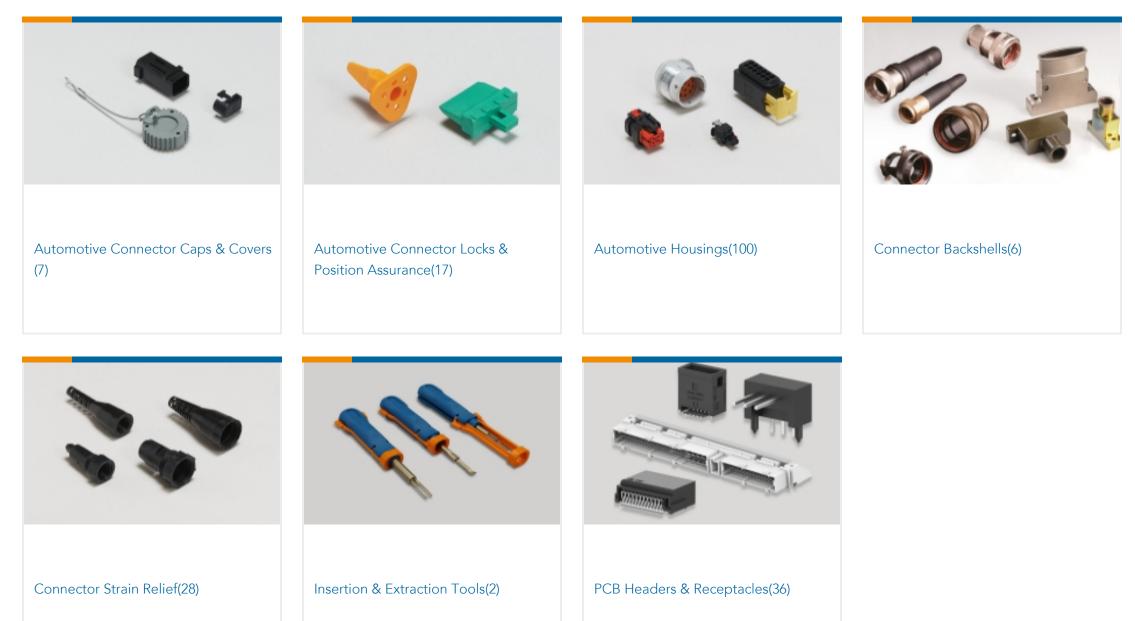

Housing for Male Terminals, Wire-to-Wire / Wire-to-Panel, 12 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Hybrid



Customers Also Bought

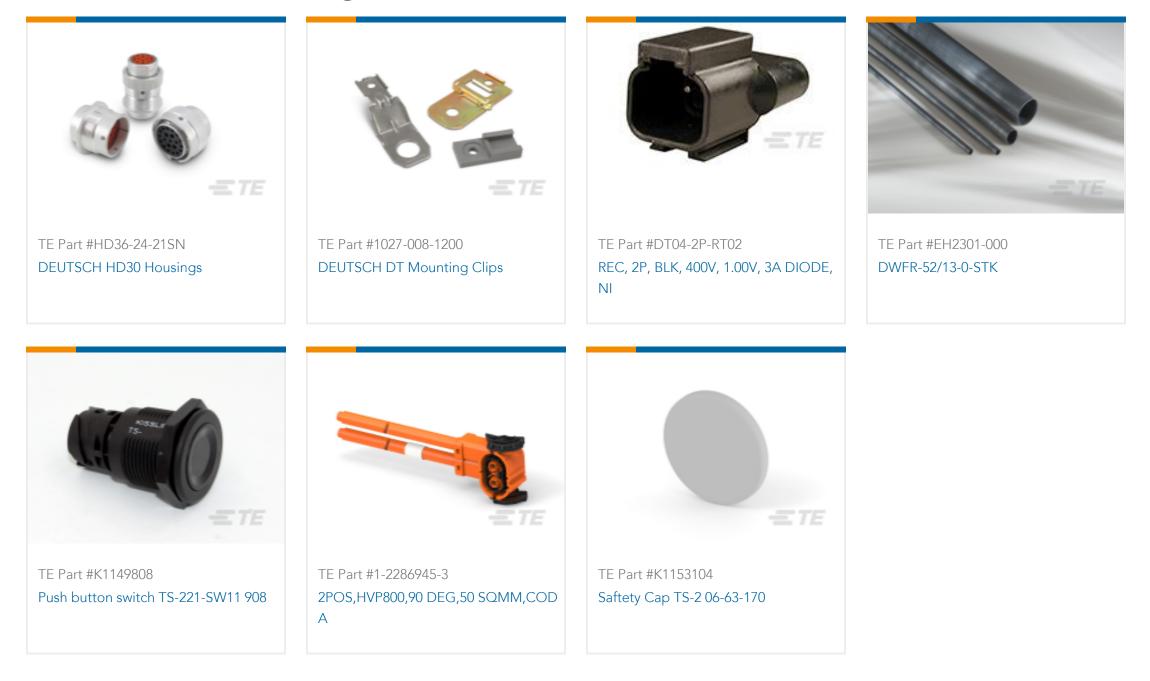

Documents

Product Drawings REC, 12P, GRY, N, FLANGE, A English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_DTM04-12PA-L012_A.2d_dxf.zip English

Customer View Model ENG_CVM_CVM_DTM04-12PA-L012_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DTM04-12PA-L012_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

S For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire / Wire-to-Panel, 12 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Hybrid



English
Agency Approvals
UL Report
English