
DTM04-2P-P006 ACTIVE

DEUTSCH | DEUTSCH DT, DEUTSCH DTM

TE Internal #: DTM04-2P-P006 Housing for Male Terminals, Component-to-Wire, 2 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Hybrid

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DTM Housings

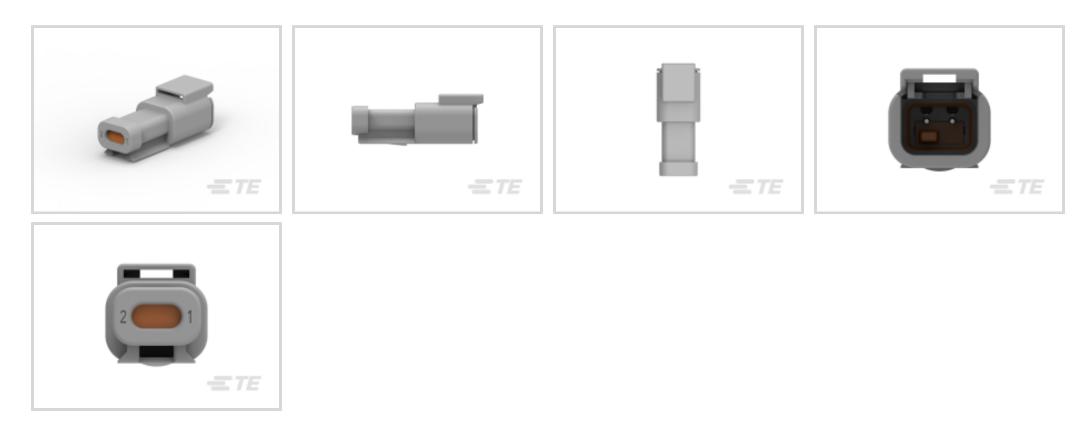

Connector System: Component-to-Wire

Number of Positions: 2

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 4.19 mm [.165 in]

Sealable: Yes

All DEUTSCH DTM Housings (109)



Features

Product Type Features

Mixed & Hybrid Connector	No	
Connector Shape	Rectangular	
Connector System	Component-to-Wire	
Connector & Housing Type	Housing for Male Terminals	
Sealable	Yes	
Connector & Contact Terminates To	Wire & Cable	
	Integrated in Housing	
Primary Locking Feature	Integrated in Housing	
Primary Locking Feature Configuration Features	Integrated in Housing	
	Integrated in Housing 0	
Configuration Features		
Configuration Features Blank Cavity Position	0	

Housing for Male Terminals, Component-to-Wire, 2 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Hybrid



Electrical Characteristics

Operating Voltage	250 VAC	
Nominal Voltage Architecture	12 V, 24 V, 48 V	
Body Features		
Cable Exit Angle	180°	
Primary Product Color	Gray	
Connector & Keying Code	A	
Contact Features		
Contact Type	Pin	
Mating Pin Diameter	1.02 mm[.04 in]	
Contact Current Rating (Max)	7.5 A	
Mechanical Attachment		
Terminal Position Assurance	Yes	
Strain Relief	Add By Accessory	
Mating Alignment Type	Keyed	
Mating Alignment	With	

Housing Features

Housing Material	PAGF			
Centerline (Pitch)	4.19 mm[.165 in]			
Dimensions				
Connector Height	16.21 mm[.638 in]			
Product Width	16.54 mm[.651 in]			
Product Length	42.67 mm[1.68 in]			
Compatible Insulation Diameter Range	1.35 – 3.05 mm[.053 – .12 in]			
Usage Conditions				
Operating Temperature (Max)	125 °C[257 °F]			
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]			
Operation/Application				
Circuit Application	Power & Signal			
Industry Standards				
Degree of Protection	IP68, IP6К9К			
Agency/Standard	SAE J2030			

C For support call+1 800 522 6752

Housing for Male Terminals, Component-to-Wire, 2 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Hybrid



UL Flammability Rating	20mm Flame Test per Standard UL-94
Packaging Features	
Packaging Quantity	1000
Packaging Method	Box
Other	
Serviceable	No
Connector Position Assurance Capable	No
FU RoHS Directive 2011/65/FU	Compliant with Exemptions
EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC	Compliant with Exemptions Compliant with Exemptions
EU RoHS Directive 2011/65/EU EU ELV Directive 2000/53/EC China RoHS 2 Directive MIIT Order No 32, 2016	Compliant with Exemptions Compliant with Exemptions Restricted Materials Above Threshold
EU ELV Directive 2000/53/EC	Compliant with Exemptions

9

ppm.

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Housing for Male Terminals, Component-to-Wire, 2 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Hybrid





Also in the Series | DEUTSCH DT



Connector Seals & Cavity Plugs(6)	Connector Strain Relief(28)	Insertion & Extraction Tools(3)	Other Automotive Connector
			Accessories(27)




PCB Headers & Receptacles(103)

Also in the Series DEUTSCH DTM

Housing for Male Terminals, Component-to-Wire, 2 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Hybrid



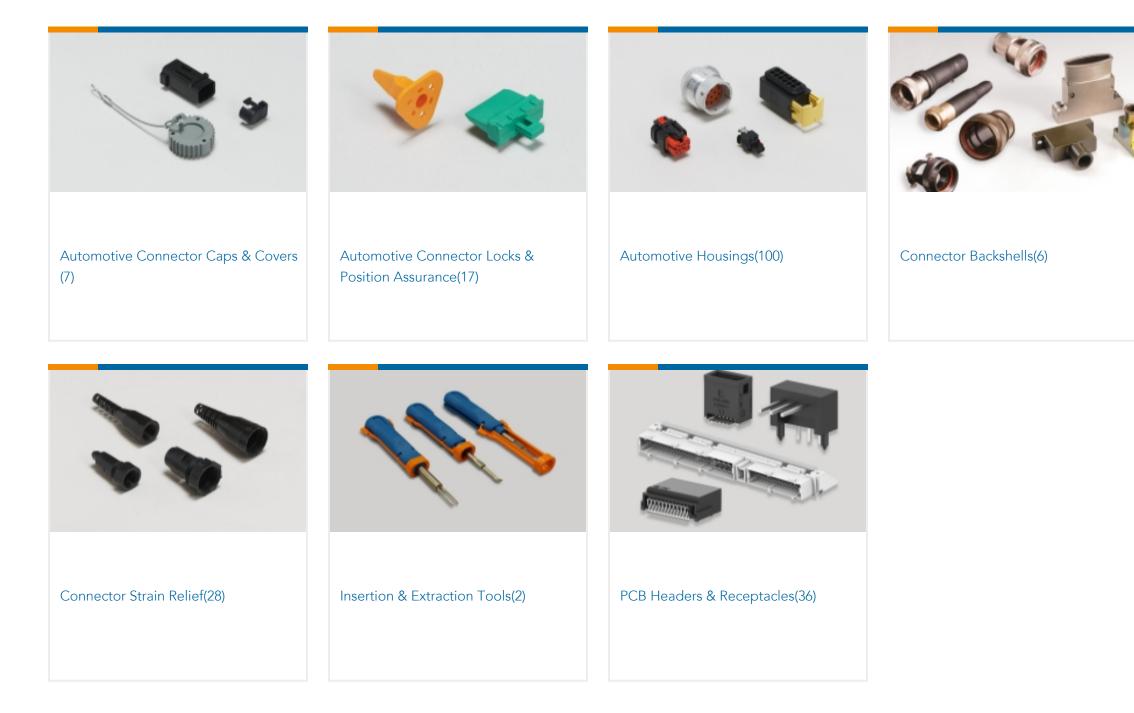

Customers Also Bought



1 L 1 alt 11 D 11000 25	
PLG, 2P, GRY, N	

WEDGE LOCK, 2P, PLG, ORG, DTM

4POS,AMP MCP1.5K,REC HSG,ASSY

1.5MM TAB HSG 36 POS ASSY



TE Part #K1150157 Toggle Switch 07-2-2-24 B 901



TE Part #4-968972-1 MCP2,8 GEH ASSY 12P



TE Part #HD16-9-96SE PLUG ASM





Documents

S For support call+1 800 522 6752

Housing for Male Terminals, Component-to-Wire, 2 Position, .165 in [4.19 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Hybrid



Product Drawings

REC, 2P, GRY, 120 OHM RESISTOR, AU, A

English

CAD Files

Customer View Model ENG_CVM_CVM_DTM04-2P-P006_99.2d_dxf.zip

English

3D PDF 3D

Customer View Model ENG_CVM_CVM_DTM04-2P-P006_99.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DTM04-2P-P006_99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English