


DEUTSCH | DEUTSCH DT, DEUTSCH DTM

TE Internal #: DTM15-12PA PCB Mount Header, Vertical, Wire-to-Board, 12 Position, 4.19 mm [. 165 in] Centerline, Fully Shrouded, Nickel, Through Hole - Solder, Sealable, Hybrid

View on TE.com >

Connectors > PCB Connectors > PCB Headers & Receptacles > DEUTSCH DTM Headers

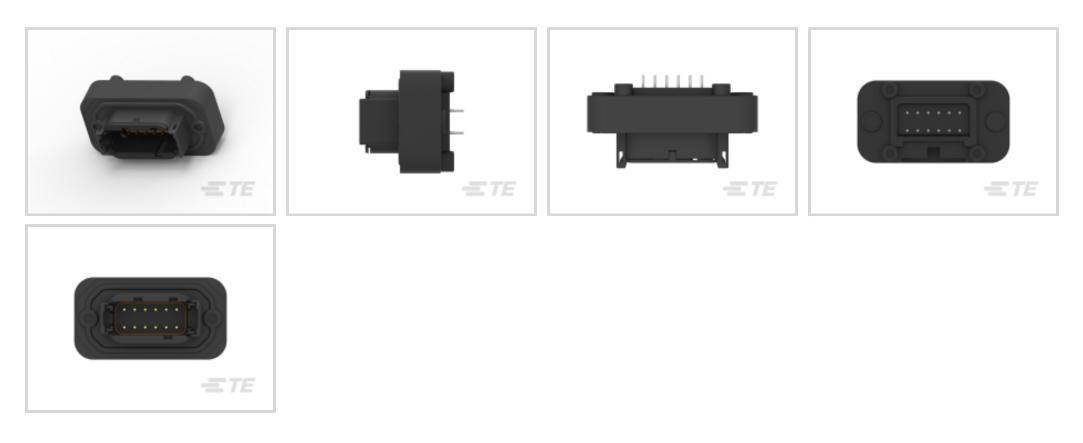

Connector System: Wire-to-Board

Number of Positions: 12

Centerline (Pitch): 4.19 mm [.165 in]

Sealable: Yes

PCB Mount Orientation: Vertical

All DEUTSCH DTM Headers (32)



Features

Product Type Features

Mixed & Hybrid Header	No	
Connector Shape	Rectangular	
PCB Connector Assembly Type	PCB Mount Header	
Header Type	Fully Shrouded	
Connector System	Wire-to-Board	
Sealable	Yes	
Connector & Contact Terminates To	Wire & Cable	
Configuration Features		
Number of Sections	1	
Number of Signal Positions	12	
Number of Positions	12	
PCB Mount Orientation	Vertical	
Number of Rows	2	

C For support call+1 800 522 6752

PCB Mount Header, Vertical, Wire-to-Board, 12 Position, 4.19 mm [.165 in] Centerline, Fully Shrouded, Nickel, Through Hole - Solder, Sealable, Hybrid



Electrical Characteristics

Voltage Rating (Max)	250 VAC
Nominal Voltage Architecture	12 V, 24 V
Operating Voltage	250 VAC
Body Features	
Primary Product Color	Gray
Connector & Keying Code	A
Contact Features	
Contact Size	Size 20
Contact Type	Pin
Mating Pin Diameter	1.02 mm[.04 in]
Contact Mating Area Plating Material	Nickel
Contact Current Rating (Max)	7.5 A
Termination Features	
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Mounting Holes	With
Mating Alignment Type	Keyed
Mating Retention	With
Mating Alignment	With
PCB Mount Alignment	Without
Panel Mount Feature	With
PCB Mount Retention	With
PCB Mount Retention Type	Mounting Screw
Mating Retention Type	Locking Interface
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	4.19 mm[.165 in]
Dimensions	
Connector Length	30.23 mm[1.19 in]
Connector Width	61 mm[2.4 in]
PCB Thickness (Recommended)	.78 – 2.36 mm[.031 – .093 in]
	00/21/2022 00.2

C For support call+1 800 522 6752

09/21/2023 09:27AM | Page 2

PCB Mount Header, Vertical, Wire-to-Board, 12 Position, 4.19 mm [.165 in] Centerline, Fully Shrouded, Nickel, Through Hole - Solder, Sealable, Hybrid



Usage Conditions		
Operating Temperature (Max)	125 °C[257 °F]	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]	
Operation/Application		
Shielded	No	
Circuit Application	Signal	
Industry Standards		
Degree of Protection	Not Tested	
UL Rating	Recognized	
UL Flammability Rating	UL 94V-0	
Packaging Features		
Packaging Type	Box	
Packaging Quantity	125	
Other		
Interface Number	DTM04-12P	

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	
Solder Process Capability	Not reviewed for solder process capability	

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part

PCB Mount Header, Vertical, Wire-to-Board, 12 Position, 4.19 mm [.165 in] Centerline, Fully Shrouded, Nickel, Through Hole - Solder, Sealable, Hybrid




numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | DEUTSCH DT

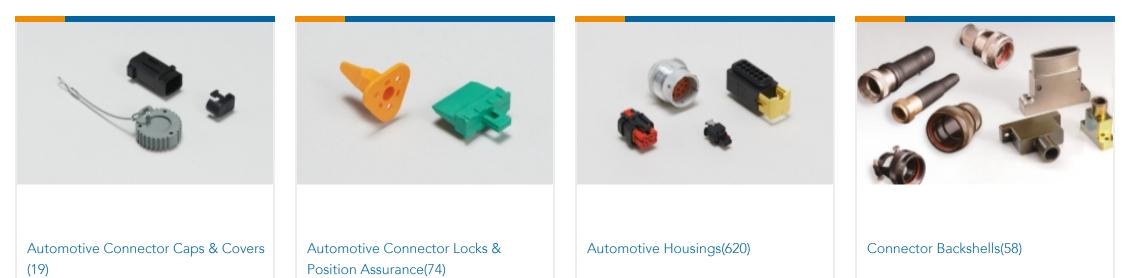

Connector Seals & Cavity Plugs(6)	Connector Strain Relief(28)	Insertion & Extraction Tools(3)	Other Automotive Connector Accessories(27)




PCB Headers & Receptacles(103)

Also in the Series DEUTSCH DTM


C For support call+1 800 522 6752

PCB Mount Header, Vertical, Wire-to-Board, 12 Position, 4.19 mm [.165 in] Centerline, Fully Shrouded, Nickel, Through Hole - Solder, Sealable, Hybrid



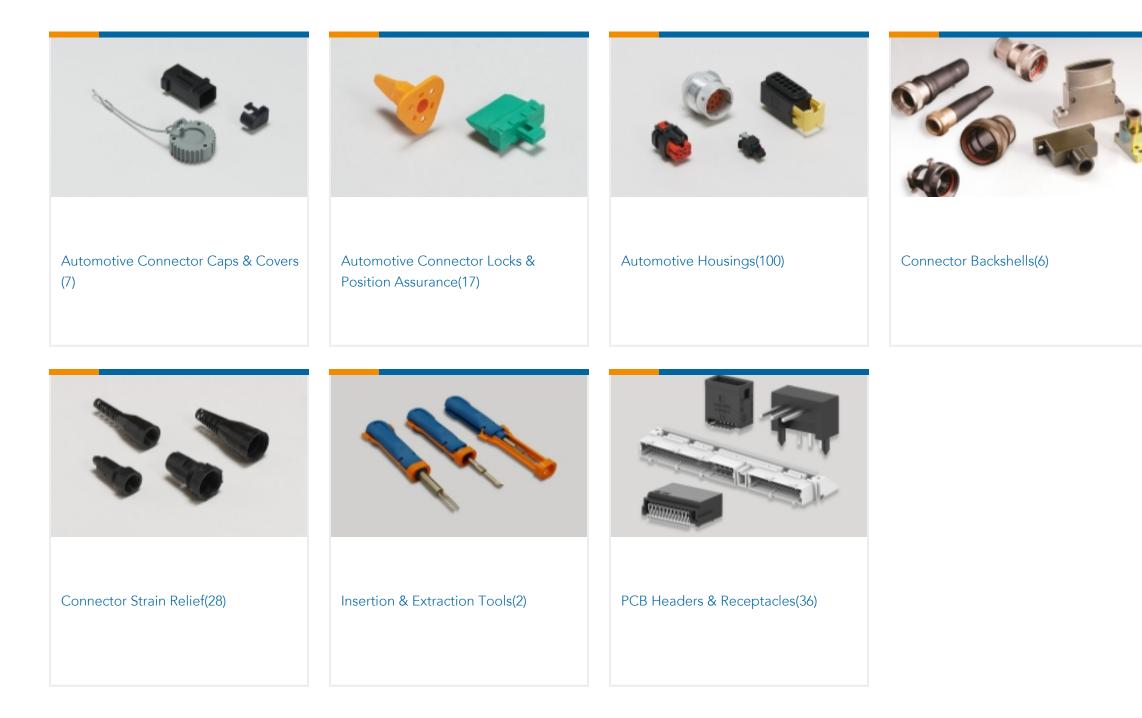

Customers Also Bought

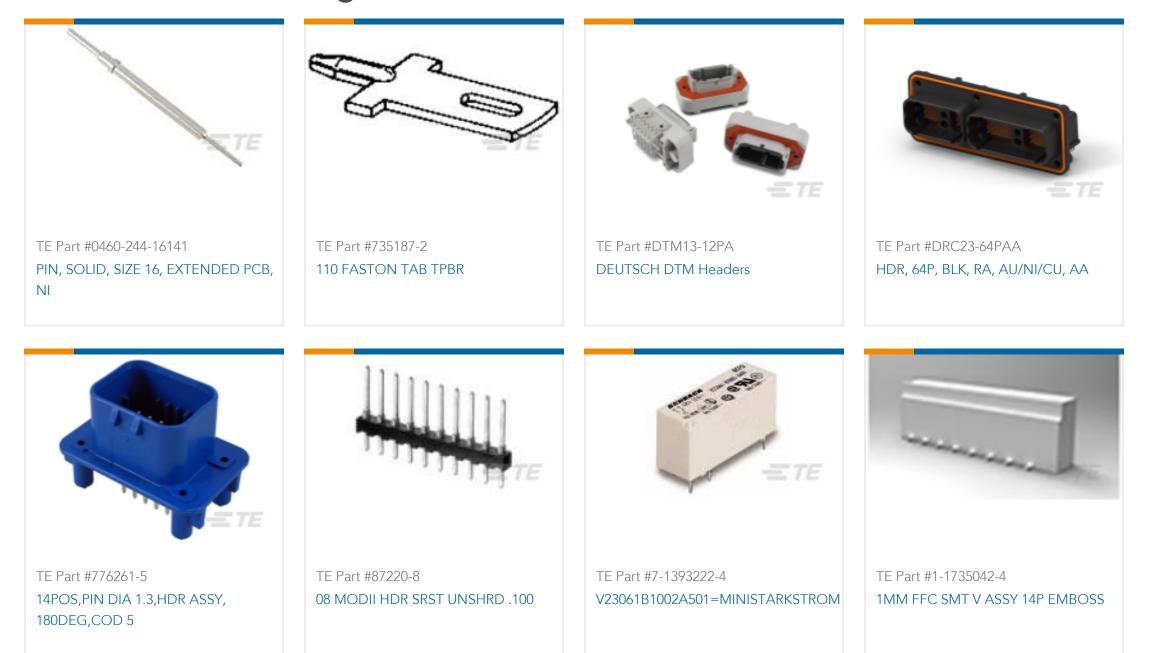

TE Part #1-1825058-6 ADE07S04=DIP SWTCH,EXT,SMT-GW

Documents

PCB Mount Header, Vertical, Wire-to-Board, 12 Position, 4.19 mm [.165 in] Centerline, Fully Shrouded, Nickel, Through Hole - Solder, Sealable, Hybrid



Product Drawings HDR, 12P, GRY, ST, NI/CU, A

English

CAD Files

Customer View Model ENG_CVM_CVM_DTM15-12PA_99.2d_dxf.zip

English

3D PDF 3D

Customer View Model ENG_CVM_CVM_DTM15-12PA_99.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DTM15-12PA_99.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Agency Approvals UL Report

English