DTP04-4P-E004 - ACTIVE

DEUTSCH | DEUTSCH DT, DEUTSCH DTP

TE Internal #: DTP04-4P-E004 Housing for Male Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DTP Housings



Connector System: Wire-to-Wire

Number of Positions: 4

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 6.71 mm [.264 in]

Sealable: Yes

All DEUTSCH DTP Housings (34)

Features

Product Type Features

Mixed & Hybrid Connector

Connector Shape	Rectangular			
Connector System	Wire-to-Wire			
Connector & Housing Type	Housing for Male Terminals			
Sealable	Yes			
Connector & Contact Terminates To	Wire & Cable			
Primary Locking Feature	Integrated in Housing			
Configuration Features				
Blank Cavity Position	0			
Number of Positions	4			
Number of Rows	2			
Electrical Characteristics				
Operating Voltage	200 VAC			
Nominal Voltage Architecture	12 V, 24 V, 48 V			
Body Features				
Cable Exit Angle	180°			

Housing for Male Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid



Contact Features		
Contact Size	Size 12	
Contact Type	Pin	
Mating Pin Diameter	2.39 mm[.094 in]	
Contact Current Rating (Max)	25 A	
Mechanical Attachment		
Terminal Position Assurance	Yes	
Strain Relief	Add By Accessory	
Mating Alignment Type	Polarized	
Mating Alignment	With	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		
Housing Material	PAGF	
Centerline (Pitch)	6.71 mm[.264 in]	
Dimensions		
Connector Height	26.62 mm[1.048 in]	
Product Width	26.92 mm[1.06 in]	
Product Length	47.27 mm[1.861 in]	
Row-to-Row Spacing	10.16 mm[.4 in]	
Compatible Insulation Diameter Range	3.4 – 4.32 mm[.134 – .17 in]	
Usage Conditions		
Operating Temperature (Max)	125 °C[257 °F]	
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]	
Operation/Application		
Circuit Application	Power & Signal	
Industry Standards		
Degree of Protection	IP68	
Agency/Standard	SAE J2030	
UL Flammability Rating	20mm Flame Test per Standard UL-94	

Housing for Male Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid



Packaging Quantity	350
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in

Halogen Content

Solder Process Capability

Component Part)

Article Safe Usage Statements:

Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900 ppm.

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


Housing for Male Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid



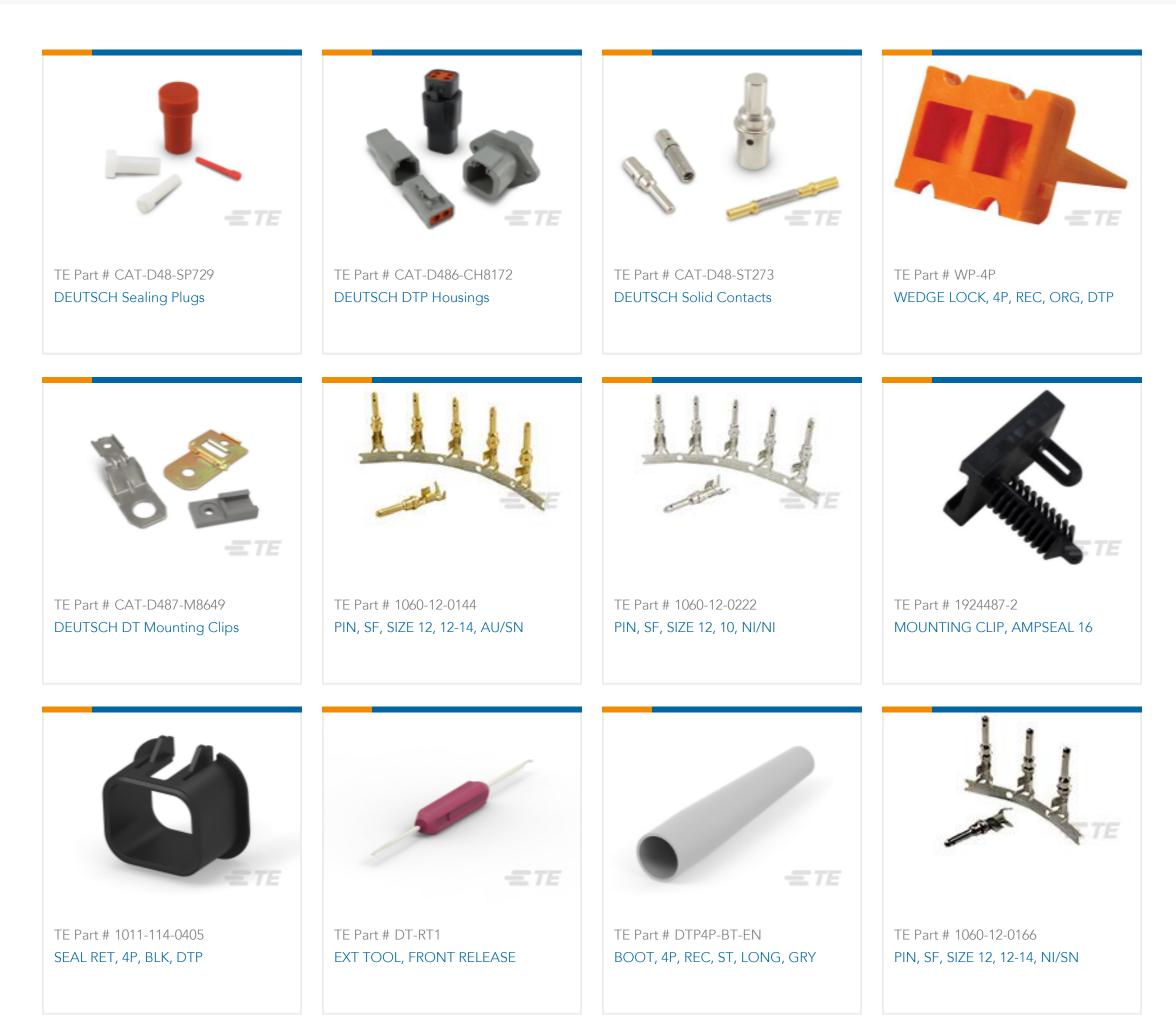




Also in the Series | DEUTSCH DT

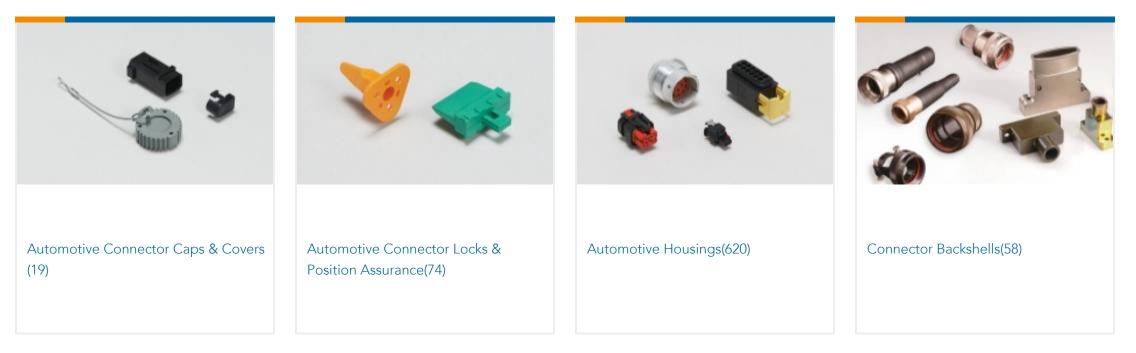

Housing for Male Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid




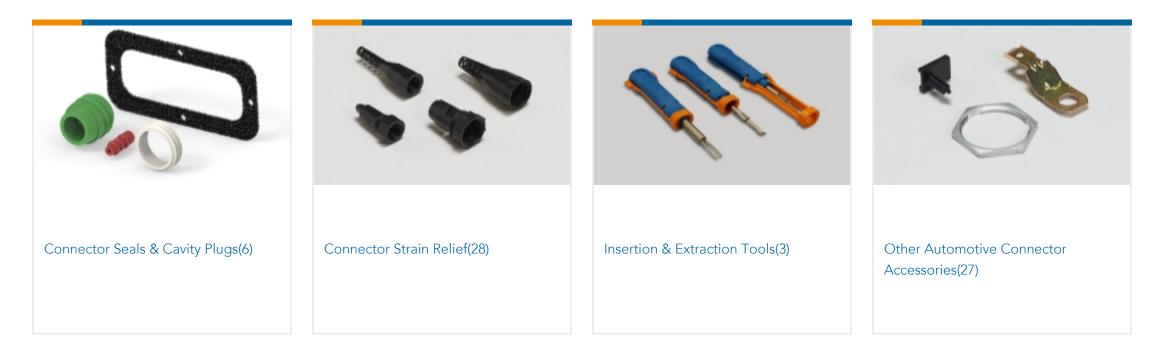



PCB Headers & Receptacles(103)

Also in the Series | DEUTSCH DTP

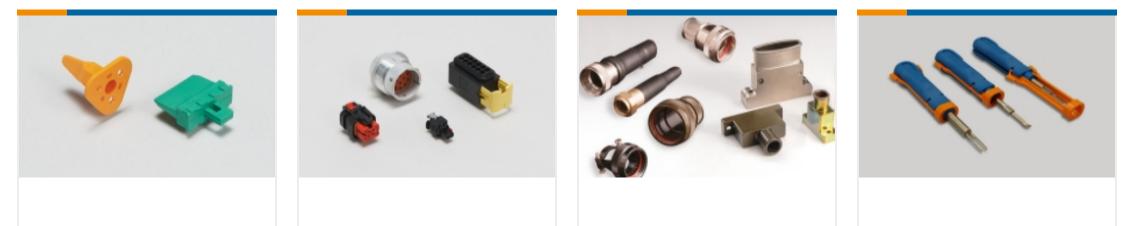

Automotive Connector Locks & Position Assurance(4)	Automotive Housings(34)	Connector Backshells(1)	Insertion & Extraction Tools(3)




PCB Headers & Receptacles(4)

Customers Also Bought

Housing for Male Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid



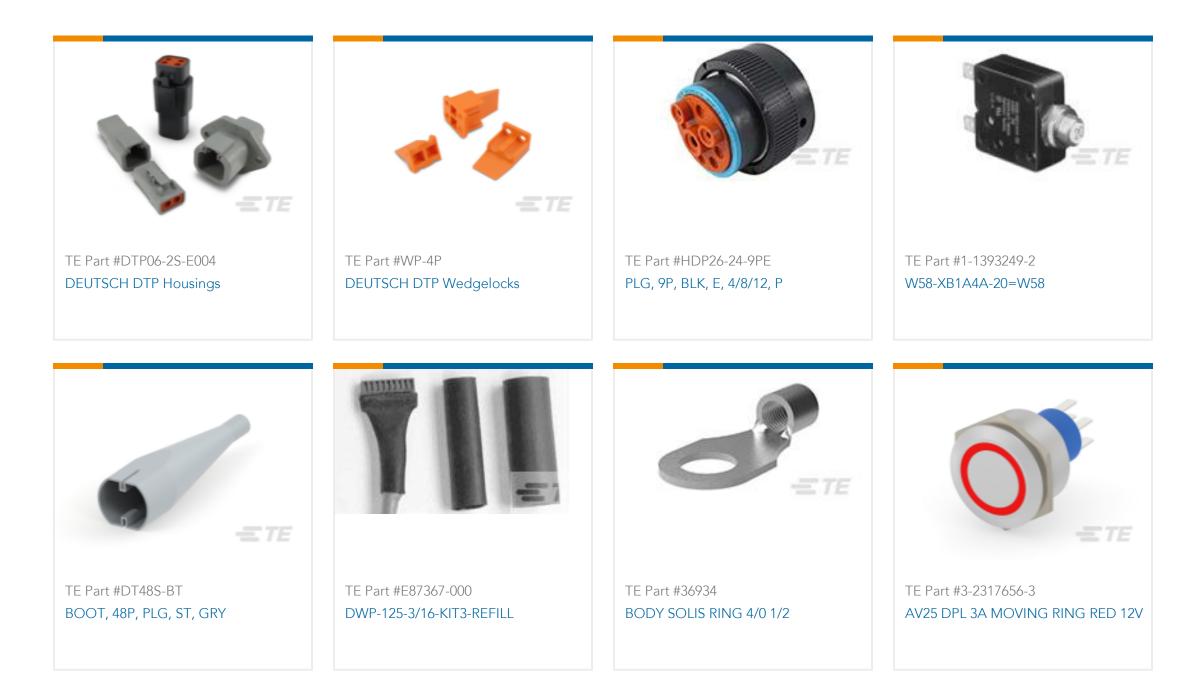

Documents

Product Drawings REC, 4P, BLK, N

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_DTP04-4P-E004_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_DTP04-4P-E004_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DTP04-4P-E004_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

Housing for Male Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Black, Wire & Cable, Power & Signal, Hybrid



Agency Approvals UL Report

English