# DTP04-4P-L012 ACTIVE

### DEUTSCH | DEUTSCH DT, DEUTSCH DTP

TE Internal #: DTP04-4P-L012 Housing for Male Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Panel Mount, Hybrid

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH DTP Housings



Connector System: Wire-to-Wire

Number of Positions: **4** 

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 6.71 mm [.264 in ]

Sealable: Yes

All DEUTSCH DTP Housings (34)

## Features

## Product Type Features

Mixed & Hybrid Connector

Body Features	
Nominal Voltage Architecture	12 V, 24 V, 48 V
Operating Voltage	200 VAC
Electrical Characteristics	
Number of Rows	2
Number of Positions	4
Connector Modification	Welded Flange
Blank Cavity Position	0
Configuration Features	
Primary Locking Feature	Integrated in Housing
Connector & Contact Terminates To	Wire & Cable
Sealable	Yes
Connector & Housing Type	Housing for Male Terminals
Connector System	Wire-to-Wire
Connector Shape	Rectangular

Housing for Male Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Panel Mount, Hybrid



Cable Exit Angle	180°
Primary Product Color	Gray
Contact Features	
Contact Size	Size 12
Contact Type	Pin
Mating Pin Diameter	2.39 mm[.094 in]
Contact Current Rating (Max)	25 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Panel Mount
Lessele e Elesteres	
Housing Features	
Housing Features Housing Material	PAGF

## Dimensions

Connector Height	38.1 mm[1.5 in]			
Product Width	53.34 mm[2.1 in]			
Product Length	47.27 mm[1.861 in]			
Row-to-Row Spacing	10.16 mm[.4 in]			
Compatible Insulation Diameter Range	3.4 – 4.32 mm[.134 – .17 in]			
Usage Conditions				
Operating Temperature (Max)	125 °C[257 °F]			
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]			
Operation/Application				
Circuit Application	Power & Signal			
Industry Standards				
Degree of Protection	IP68			
Agency/Standard	SAE J2030			
UL Flammability Rating	20mm Flame Test per Standard UL-94			
Packaging Features				

Housing for Male Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Panel Mount, Hybrid



Packaging Quantity	200
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

## **Product Compliance**

### For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in

### Component Part)

#### Article Safe Usage Statements:

Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900 ppm.

Solder Process Capability

Halogen Content

Not reviewed for solder process capability


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**


Housing for Male Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Panel Mount, Hybrid



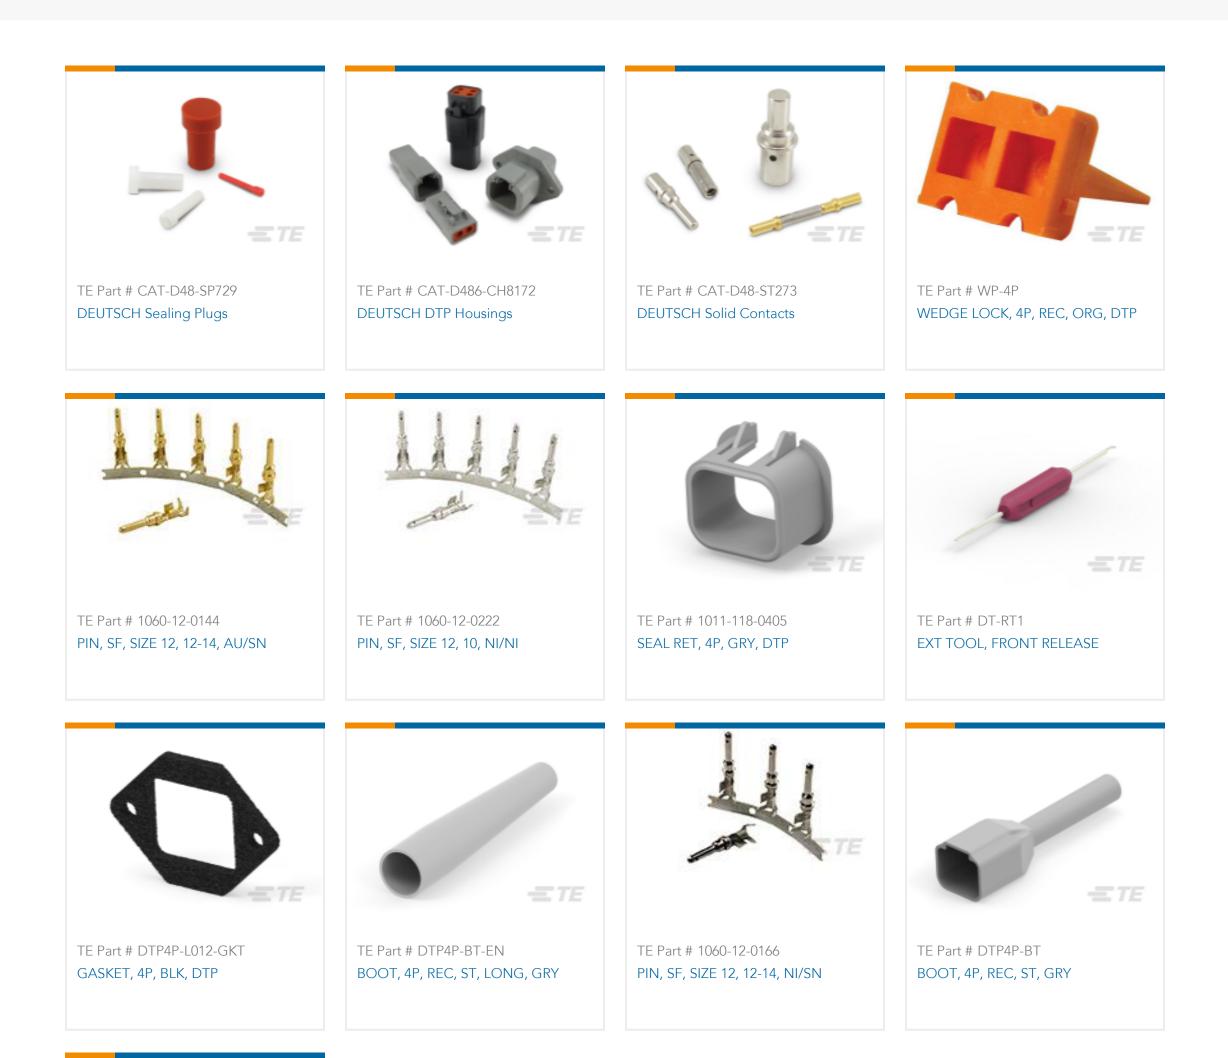




## Also in the Series DEUTSCH DT

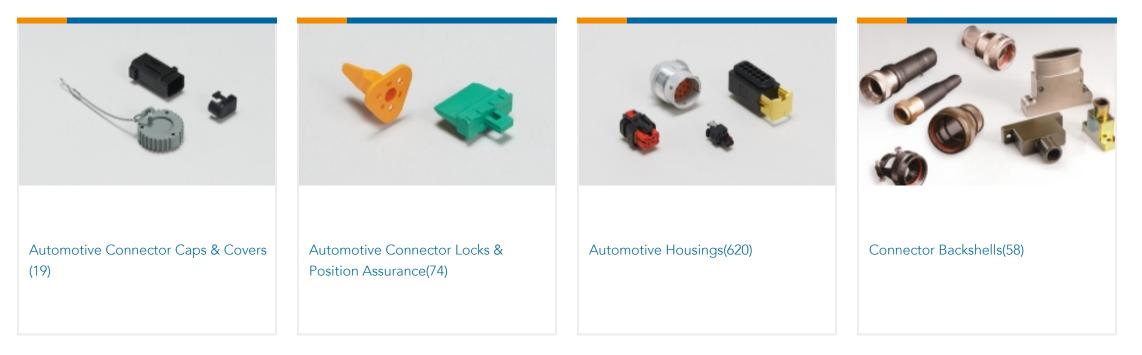

Housing for Male Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Panel Mount, Hybrid




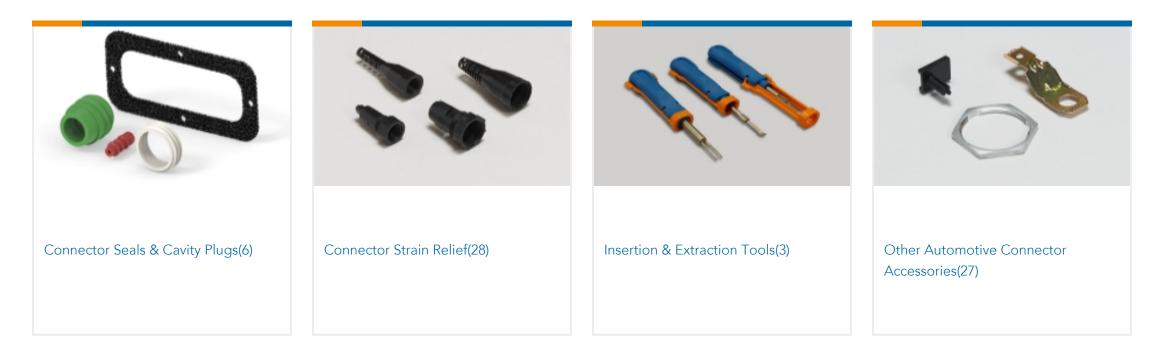



PCB Headers & Receptacles(103)

## Also in the Series DEUTSCH DTP

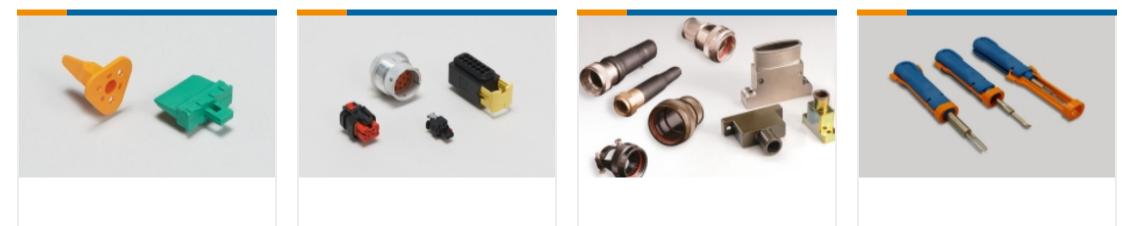

Automotive Connector Locks & Position Assurance(4)	Automotive Housings(34)	Connector Backshells(1)	Insertion & Extraction Tools(3)




PCB Headers & Receptacles(4)

Customers Also Bought

Housing for Male Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Panel Mount, Hybrid



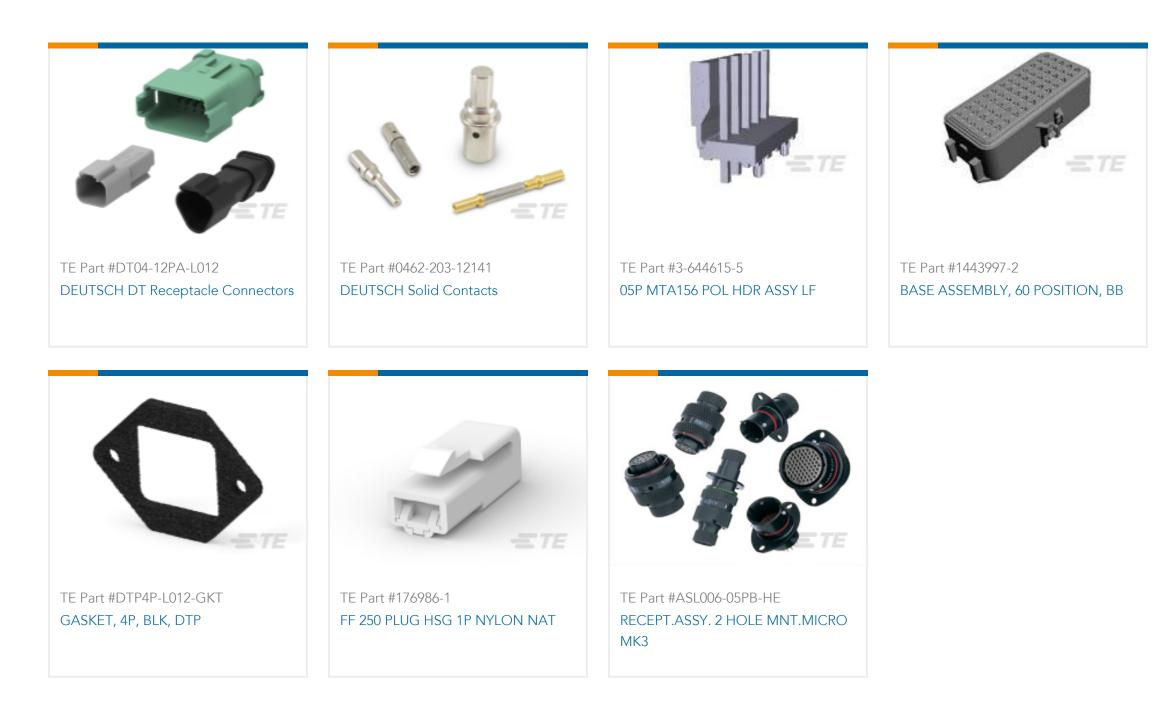

## Documents

Product Drawings REC, 4P, GRY, N, FLANGE

English

CAD Files 3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_DTP04-4P-L012\_B.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_DTP04-4P-L012\_B.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_DTP04-4P-L012\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

**Product Specifications** 

**Application Specification** 

English

Housing for Male Terminals, Wire-to-Wire, 4 Position, .264 in [6.71 mm] Centerline, Sealable, Gray, Wire & Cable, Power & Signal, Panel Mount, Hybrid



Agency Approvals UL Report

English