
DEUTSCH | DEUTSCH DT, DEUTSCH DTHD

TE Internal #: DTSK04-1-08PA Housing for Male Terminals, Wire-to-Wire, 1 Position, Sealable, Gray, Wire & Cable, Power, Panel Mount / Cable Mount (Free-Hanging), Hybrid

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings

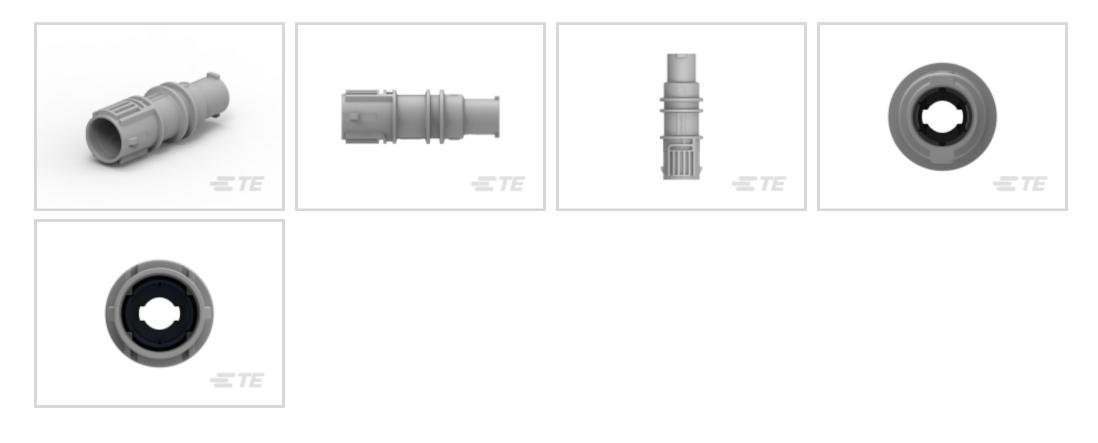

Connector System: Wire-to-Wire

Number of Positions: 1

Connector & Housing Type: Housing for Male Terminals

Sealable: Yes

Mating Pin Diameter: 8 mm [.315 in]

Features



Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Circular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Male Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Integrated in Housing
Configuration Features	
Number of Positions	1
Number of Rows	0
Electrical Characteristics	
Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V
Body Features	

Housing for Male Terminals, Wire-to-Wire, 1 Position, Sealable, Gray, Wire & Cable, Power, Panel Mount / Cable Mount (Free-Hanging), Hybrid



Cable Exit Angle	180°
Primary Product Color	Gray
Connector & Keying Code	A
Contact Features	
Contact Size	Size 8
Contact Type	Pin
Mating Pin Diameter	8 mm[.315 in]
Contact Current Rating (Max)	150 A
Mechanical Attachment	
Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging), Panel Mount
Connector Mounting Type Housing Features	Cable Mount (Free-Hanging), Panel Mount
	Cable Mount (Free-Hanging), Panel Mount PA GF

Dimensions

Connector Height	27.7 mm[1.091 in]
Product Width	27.7 mm[1.091 in]
Product Length	80.41 mm[3.166 in]
Compatible Insulation Diameter Range	8.17 – 9.66 mm, 9.49 – 10.52 mm, 10.59 – 11.59 mm[.322 – .38 in][.374 – .414 in][.417 – .456 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power
Industry Standards	
Degree of Protection	IP68, IP6K9K
UL Flammability Rating	Not tested
Packaging Features	

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 1 Position, Sealable, Gray, Wire & Cable, Power, Panel Mount / Cable Mount (Free-Hanging), Hybrid



Packaging Quantity	150
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Housing for Male Terminals, Wire-to-Wire, 1 Position, Sealable, Gray, Wire & Cable, Power, Panel Mount / Cable Mount (Free-Hanging), Hybrid




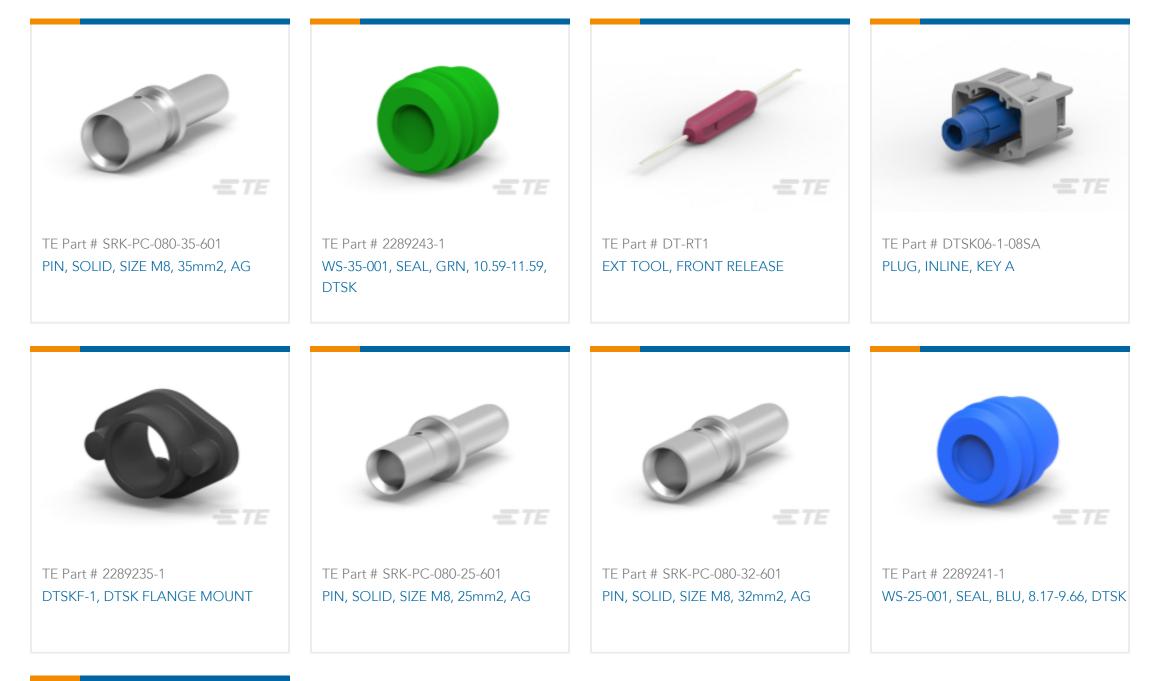



TE Part # 2289242-1 WS-32-001, SEAL, RED, 9.49-10.52, DTSK

Also in the Series | DEUTSCH DT

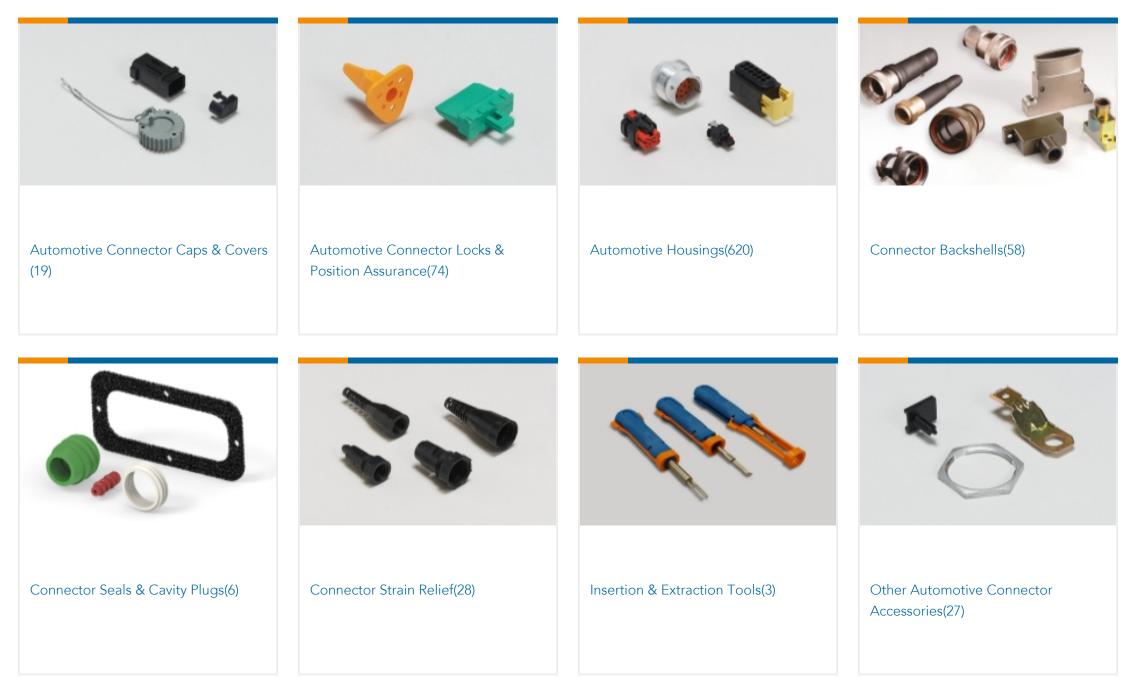


Housing for Male Terminals, Wire-to-Wire, 1 Position, Sealable, Gray, Wire & Cable, Power, Panel Mount / Cable Mount (Free-Hanging), Hybrid






Also in the Series | DEUTSCH DTHD

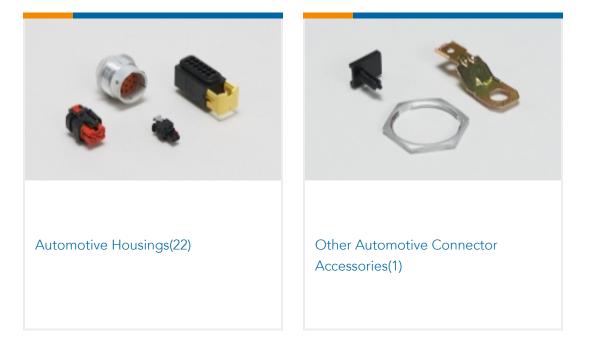

Customers Also Bought

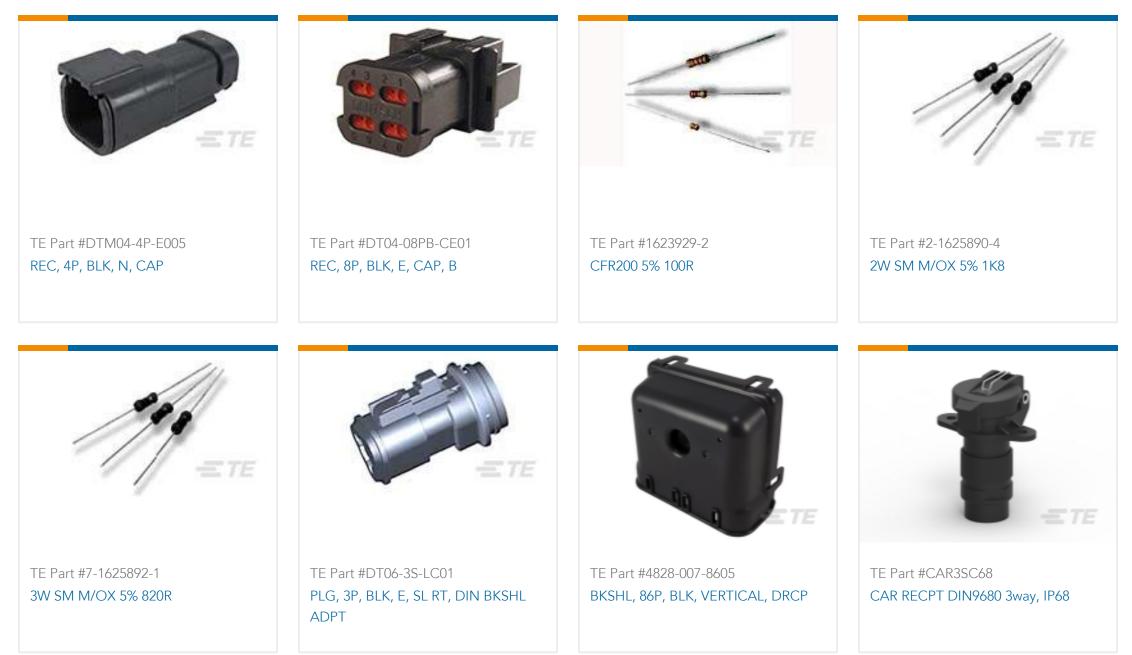



Housing for Male Terminals, Wire-to-Wire, 1 Position, Sealable, Gray, Wire & Cable, Power, Panel Mount / Cable Mount (Free-Hanging), Hybrid



Documents

Product Drawings RECEPTACLE, INLINE, KEY A

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_DTSK04-1-08PA_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_DTSK04-1-08PA_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_DTSK04-1-08PA_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

DEUTSCH DTSK Connectors Series Brief

English

ICT Terminals and Connectors Catalogue

English

DEUTSCH DTSK Components Infographic

English

Product Specifications
Application Specification

English