# HD10-9-1939P-B022 - ACTIVE

### DEUTSCH | DEUTSCH HD, DEUTSCH HD10

TE Internal #: HD10-9-1939P-B022 Housing for Male Terminals, Wire-to-Wire, 9 Position, Sealable, Black, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C], Hybrid

#### View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH HD10 Housings



Connector System: Wire-to-Wire

Number of Positions: 9

Connector & Housing Type: Housing for Male Terminals

Sealable: Yes

Mating Pin Diameter: 1.59 mm [.063 in ]

All DEUTSCH HD10 Housings (53)

### Features

### Product Type Features

Mixed & Hybrid Connector

Connector Shape

No

Circular

Connector System	Wire-to-Wire	
Connector & Housing Type	Housing for Male Terminals	
Sealable	Yes	
Connector & Contact Terminates To	Wire & Cable	
Primary Locking Feature	Contact Retainer	
Configuration Features		
Blank Cavity Position	0	
Number of Positions	9	
Electrical Characteristics		
Operating Voltage	250 VAC	
Nominal Voltage Architecture	12 V, 24 V, 48 V	
Body Features		
Cable Exit Angle	180°	
Primary Product Color	Black	

Housing for Male Terminals, Wire-to-Wire, 9 Position, Sealable, Black, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C], Hybrid



### **Contact Features**

Contact Size	Size 16
Contact Type	Pin
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	Add By Accessory
Mating Alignment Type	Polarization Slot
Mating Alignment	With
Connector Mounting Type	Panel Mount
Housing Features	
Housing Material	PAGF
Dimensions	
Connector Height	41.28 mm[1.625 in]
Product Width	44.45 mm[1.75 in]
Product Length	42.18 mm[1.66 in]
Compatible Insulation Diameter Range	2.54 – 3.81 mm[.1 – .15 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Degree of Protection	IP68, IP6K9K
UL Flammability Rating	UL 94V-1
Packaging Features	
Packaging Quantity	250
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

Housing for Male Terminals, Wire-to-Wire, 9 Position, Sealable, Black, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C], Hybrid



## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**

Housing for Male Terminals, Wire-to-Wire, 9 Position, Sealable, Black, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C], Hybrid



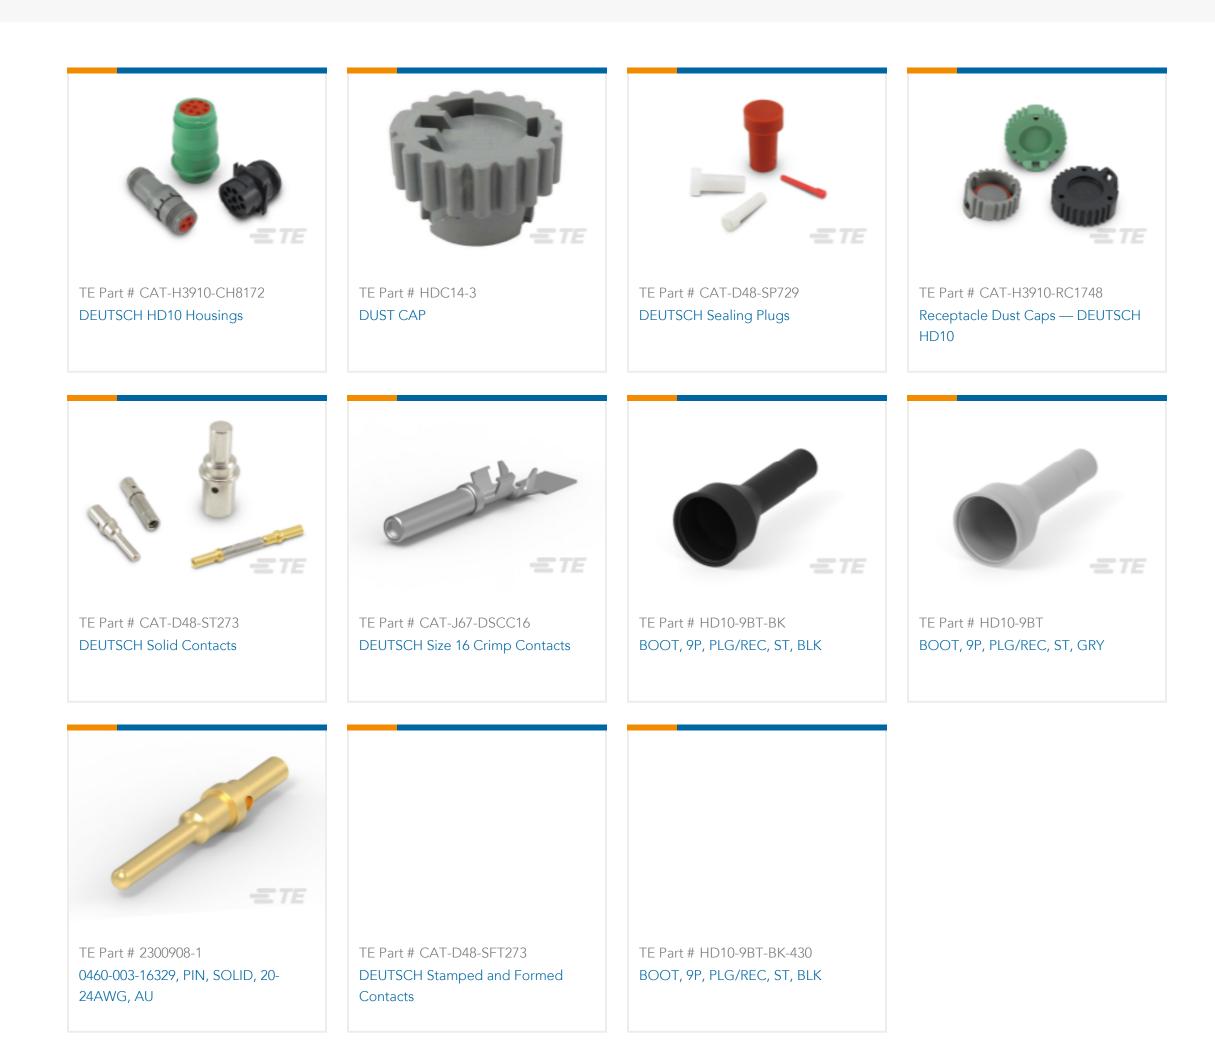

# Also in the Series | DEUTSCH HD

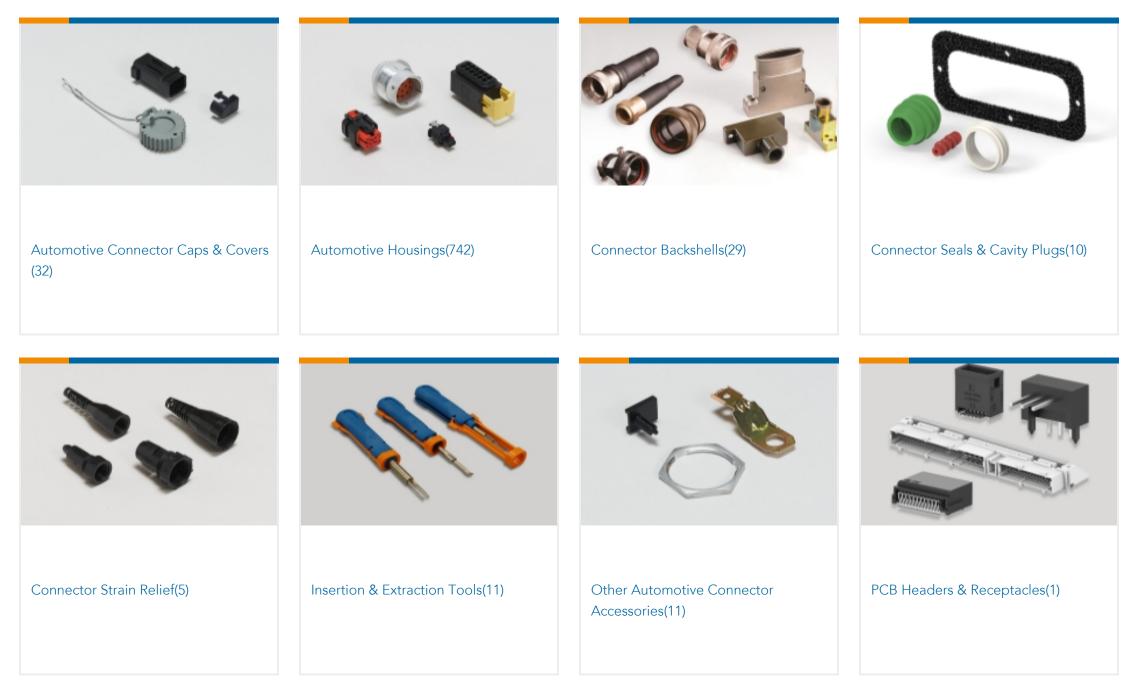


# Also in the Series DEUTSCH HD10


**C** For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 9 Position, Sealable, Black, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C], Hybrid



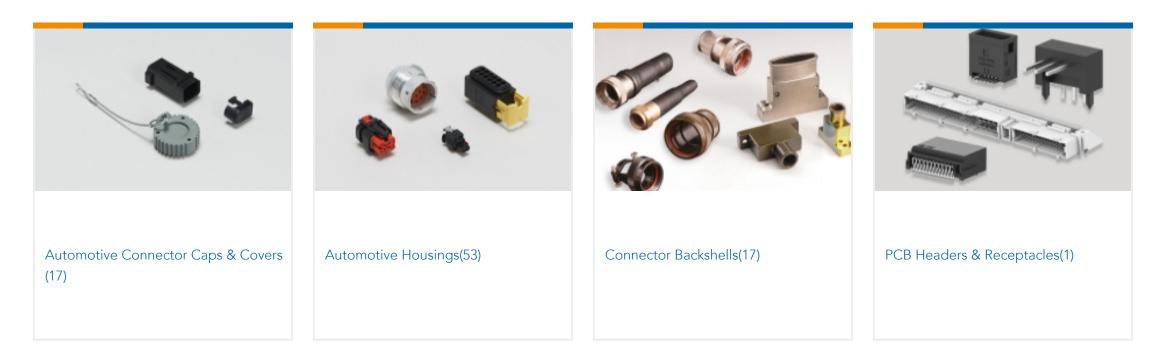

# Customers Also Bought

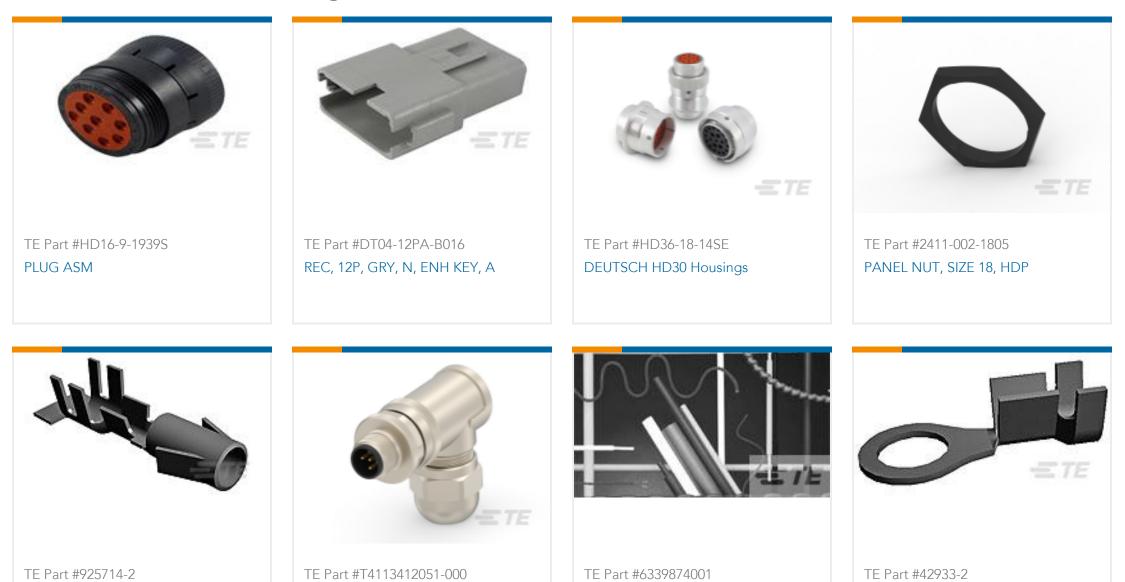

MATENLOK SOCKET.140	M12 M, 5P GOLD B_CODE RA	CGPT-12/4-0-SP	RING TERMINAL 20-16 AWG TPBR
	SHIELDED PG9		



### Documents

Product Drawings

**RECP ASM** 

English

### **CAD** Files

Customer View Model ENG\_CVM\_CVM\_HD10-9-1939P-B022\_99.2d\_dxf.zip

English

3D PDF

**S** For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 9 Position, Sealable, Black, Wire & Cable, Power & Signal, Panel Mount, -67 – 257 °F [-55 – 125 °C], Hybrid



3D

Customer View Model ENG\_CVM\_CVM\_HD10-9-1939P-B022\_99.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_HD10-9-1939P-B022\_99.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications Application Specification

English

Agency Approvals UL Report

English