## DEUTSCH | DEUTSCH HD, DEUTSCH HD10

TE Internal #: HD16-9-1939SE Housing for Female Terminals, Wire-to-Wire, 9 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid

### View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > DEUTSCH HD10 Housings



Connector System: Wire-to-Wire

Number of Positions: 9

Connector & Housing Type: Housing for Female Terminals

Sealable: Yes

Mating Pin Diameter: 1.59 mm [.063 in ]

## All DEUTSCH HD10 Housings (53)



## Features

## Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Circular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Contact Retainer
Configuration Features	
Blank Cavity Position	0
Number of Positions	9
Electrical Characteristics	
Operating Voltage	250 VAC

Housing for Female Terminals, Wire-to-Wire, 9 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid



Nominal Voltage Architecture	12 V, 24 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Black
Contact Features	
Contact Size	Size 16
Contact Type	Socket
Mating Pin Diameter	1.59 mm[.063 in]
Contact Current Rating (Max)	13 A
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	Add By Accessory
Mating Alignment Type	Polarizing Rib
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	

## Dimensions

Housing Material

Connector Height	40.39 mm[1.59 in]
Product Width	40.39 mm[1.59 in]
Product Length	41.46 mm[1.632 in]
Compatible Insulation Diameter Range	1.35 – 3.05 mm[.053 – .12 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Degree of Protection	IP68, IP6K9K
UL Flammability Rating	UL 94V-1
Packaging Features	

PA GF

Housing for Female Terminals, Wire-to-Wire, 9 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid



Packaging Quantity	250
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No

## **Product Compliance**

### For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in

### Halogen Content

### Solder Process Capability

Component Part)

#### Article Safe Usage Statements:

Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900 ppm.

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## **Compatible Parts**

Housing for Female Terminals, Wire-to-Wire, 9 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid



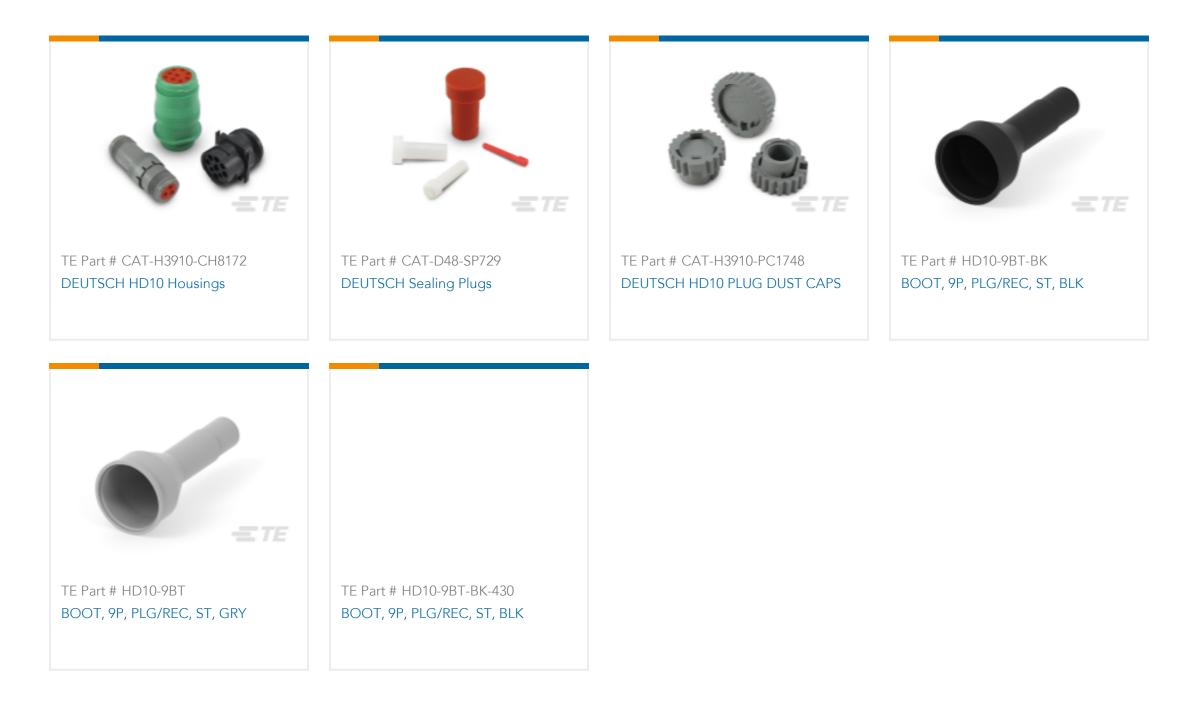

# Also in the Series DEUTSCH HD








Connector Seals & Cavity Plugs(10

Automotive Connector Caps & Covers (32)	Automotive Housings(742)	Connector Backshells(29)	Connector Seals & Cavity Plugs(10)
Connector Strain Relief(5)	Insertion & Extraction Tools(11)	Other Automotive Connector Accessories(11)	PCB Headers & Receptacles(1)

# Also in the Series | DEUTSCH HD10

Housing for Female Terminals, Wire-to-Wire, 9 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid



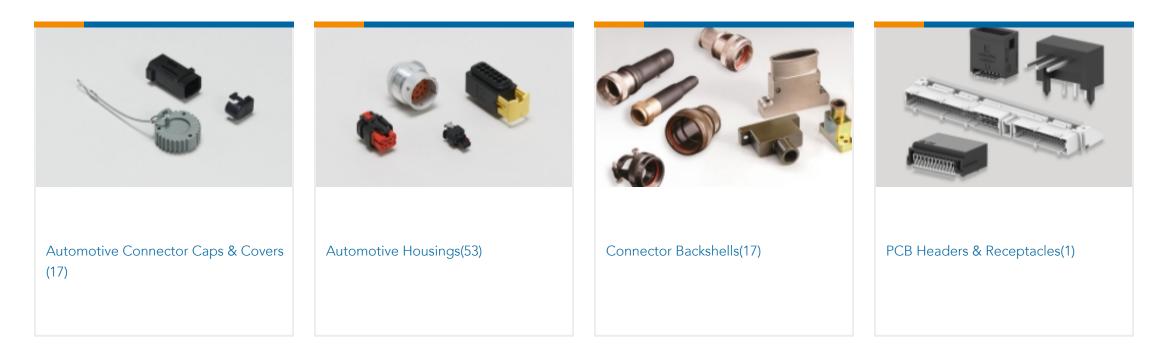

# Customers Also Bought



CPF 0402 8K25 0.1% 25PPM 1K RL	W58-XC4C12A-20=W58	PCH-112L2M-WG	2POS. JPT HOUSING ASS'Y,BLACK
131			
G STE			
TE Doct #744472 000	TE Dort #2240144 1		
TE Part #766673-000 D-406-2004	TE Part #2360144-1 FUSE BOX ASSY PCB TYPE, KUBOTA		

## Documents

Prod	luct	Drawi	ngs

PLUG ASM

English

## **CAD** Files

## 3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_HD16-9-1939SE\_99\_c-hd16-9-1939se-99.2d\_dxf.zip

Housing for Female Terminals, Wire-to-Wire, 9 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid



English

Customer View Model ENG\_CVM\_CVM\_HD16-9-1939SE\_99\_c-hd16-9-1939se-99.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_HD16-9-1939SE\_99\_c-hd16-9-1939se-99.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications Application Specification

English

Agency Approvals UL Report

English