



KISSLING | KISSLING Series 35

TE Internal #: K1143304

400 A Battery Disconnect Switch, 32 VDC, 1 Pole, M10, 0 Auxillary Positions, Long Flange, Pointer Key, Not Removable, Red Handle, KISSLING Series 35

[View on TE.com >](#)

Relays, Contactors & Switches > Switches > Battery Disconnect Switches > Battery Disconnecter, 400A, 1 Pole



Operating Voltage: **32 VDC**  
 Switch Main Contact Current Rating: **400 A**  
 Number of Poles: **1**  
 Termination Thread Size: **M10**  
 Number of Auxiliary Contacts: **0**

[All Battery Disconnecter, 400A, 1 Pole \(22\)](#)

## Features

### Product Type Features

Sealed Rotary Switch	Yes
----------------------	-----

### Configuration Features

Number of Poles	1
Number of Auxiliary Contacts	0
Switch Keying Option	Not Removable

### Electrical Characteristics

Operating Voltage	32 VDC
Switch Main Contact Current Rating	400 A

### Body Features

Operating Handle Color	Red
------------------------	-----

### Mechanical Attachment

Termination Thread Size	M10
Switch Mounting Option	Long Flange
Operating Handle Type	Pointer Key

### Dimensions

--	--



Centerline Between Flange Screw Holes	100 mm[3.937 in]
---------------------------------------	------------------

Screw Hole Diameter	6.5 mm[.256 in]
---------------------	-----------------

### Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
-----------------------------	---------------------------

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
------------------------------	---------------------------

EU ELV Directive 2000/53/EC	Compliant with Exemptions
-----------------------------	---------------------------

China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
---	--------------------------------------

EU REACH Regulation (EC) No. 1907/2006	<p>Current ECHA Candidate List: JUNE 2023 (235)</p> <p>Candidate List Declared Against: JAN 2021 (211)</p> <p>SVHC &gt; Threshold:</p> <p>Pb (2% in Component part)</p> <p><b>Article Safe Usage Statements:</b> Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.</p>
--	--

Halogen Content	Not Yet Reviewed for halogen content
-----------------	--------------------------------------

Solder Process Capability	Not reviewed for solder process capability
---------------------------	--

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

### Compatible Parts



TE Part # CAT-AL4-SBD354001  
Battery Disconnect, 400A, 1 Pole

### Also in the Series | KISSLING Series 35




Battery Disconnect Switches(166)



Rotary Switches(6)


### Customers Also Bought

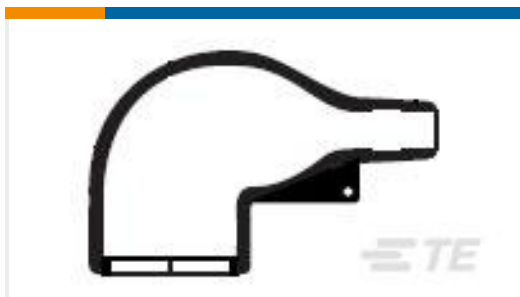

TE Part #878512-000  
222K132-25-0



TE Part #1410142-1  
MULTIGIG RT T2 .8" BP FULL RGH

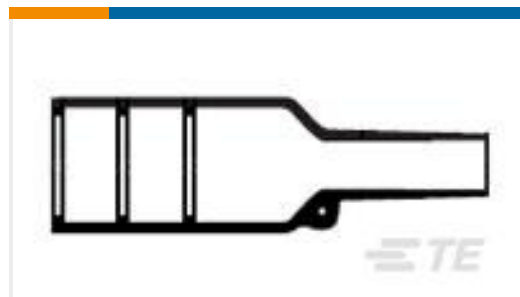

TE Part #878494-000  
202K121-25-0



TE Part #608037-000  
SO63-4-55-22-90



TE Part #625159-000  
D-110-35



TE Part #481022-000  
SO63-4-55-24-90



TE Part #371176-000  
D-1744-02



TE Part #EK4824-000  
91H1-09-04-1-B-HE050

### Documents

#### Product Drawings

Battery Disconnect 35-411-151-R

German

#### CAD Files

3D PDF

3D



**Customer View Model**

[ENG\\_CVM\\_CVM\\_35-411-151-R\\_A.2d\\_dxf.zip](#)

English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_35-411-151-R\\_A.3d\\_igs.zip](#)

English

**Customer View Model**

[ENG\\_CVM\\_CVM\\_35-411-151-R\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

**Datasheets & Catalog Pages**

[KISSLING BATTERY DISCONNECTOR Series 35 / 400A](#)

English