TE Internal #: L9000256-01 RP-SMA RF Interface, Jack, 50 Ω, Threaded, 0 – 18 GHz Operating Frequency, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F]

View on TE.com >



Connectors > RF Connectors > Coax Connectors



RF Interface: **RP-SMA** RF Connector Style: **Jack** Impedance: **50** Ω RF Connector Coupling Mechanism: **Threaded** Operating Frequency: **0 – 18 GHz**

Features

Product Type Features

Connector Product Type	Connector Assembly
RF Interface	RP-SMA
RF Connector Style	Jack

Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
PCB Mount Orientation	Edge
Number of Positions	1
Number of Coaxial Contacts	1
Electrical Characteristics	
Impedance	50 Ω
Body Features	
Cable Connector Orientation	Straight
Body Material	Brass
Body Material Finish	Plated
Body Plating Material	Gold
Contact Features	
RF Connector Center Contact Plating Material	Gold

RP-SMA RF Interface, Jack, 50 Ω , Threaded, 0 – 18 GHz Operating Frequency, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F]



RF Connector Coupling MechanismThreadedConnector Mounting TypeBoard MountRF Contact Captivation MethodMechanicalDetentWithoutUsage ConditionsOperating Temperature Range-65 – 165 °C[-85 – 329 °F]Operating Frequency0 – 18 GHzCircuit ApplicationSignal		
Termination Method to Wire & CableSolderMechanical AttachmentSolderRF Connector Coupling MechanismThreadedConnector Mounting TypeBoard MountRF Contact Captivation MethodMechanicalDetentWithoutUsage ConditionsOperating Temperature Range-65 – 165 °C[-85 – 329 °F]Operating Frequency0 – 18 GHzCircuit ApplicationSignalPackaging FeaturesPackaging Quantity50	RF Connector Center Contact Material	Brass
Mechanical Attachment RF Connector Coupling Mechanism Threaded Connector Mounting Type Board Mount RF Contact Captivation Method Mechanical Detent Without Usage Conditions Operating Temperature Range -65 – 165 °C[-85 – 329 °F] Operating Frequency 0 – 18 GHz Operating Frequency Signal Packaging Features 50	Termination Features	
RF Connector Coupling MechanismThreadedConnector Mounting TypeBoard MountRF Contact Captivation MethodMechanicalDetentWithoutDetentWithoutUsage ConditionsOperating Temperature Range-65 – 165 °C[-85 – 329 °F]Operating Tequency0 – 18 GHzCircuit ApplicationSignalPackaging PeaturesPackaging Quantity50	Termination Method to Wire & Cable	Solder
Connector Mounting TypeBoard MountRF Contact Captivation MethodMechanicalDetentWithoutUsage ConditionsOperating Temperature Range-65 – 165 °C[-85 – 329 °F]Operating Temperature Range-65 – 165 °C[-85 – 329 °F]Operating Frequency0 – 18 GHzCircuit ApplicationSignalPackaging FeaturesPackaging Quantity50	Mechanical Attachment	
RF Contact Captivation Method Mechanical Detent Without Usage Conditions -65 – 165 °C[-85 – 329 °F] Operating Temperature Range -65 – 165 °C[-85 – 329 °F] Operating Frequency 0 – 18 GHz Operating Frequency Signal Packaging Peatures 50	RF Connector Coupling Mechanism	Threaded
PetentWithoutUsage Conditions-65 – 165 °C[-85 – 329 °F]Operating Temperature Range-65 – 165 °C[-85 – 329 °F]Operation/Application0 – 18 GHzOperating Frequency0 – 18 GHzCircuit ApplicationSignalPackaging Features50	Connector Mounting Type	Board Mount
Usage Conditions Operating Temperature Range -65 – 165 °C[-85 – 329 °F] Operation/Application -0 – 18 GHz Operating Frequency 0 – 18 GHz Circuit Application Signal Packaging Features -50	RF Contact Captivation Method	Mechanical
Operating Temperature Range-65 – 165 °C[-85 – 329 °F]Operation/Application0 – 18 GHzOperating Frequency0 – 18 GHzCircuit ApplicationSignalPackaging Features50	Detent	Without
Operation/Application 0 – 18 GHz Operating Frequency 0 – 18 GHz Circuit Application Signal Packaging Features 50	Usage Conditions	
Operating Frequency0 – 18 GHzCircuit ApplicationSignalPackaging FeaturesPackaging Quantity50	Operating Temperature Range	-65 – 165 °C[-85 – 329 °F]
Circuit Application Signal Packaging Features 50	Operation/Application	
Packaging Features Packaging Quantity 50	Operating Frequency	0 – 18 GHz
Packaging Quantity 50	Circuit Application	Signal
	Packaging Features	
Packaging Method Tray	Packaging Quantity	50
	Packaging Method	Tray

Other

Lockwasher Material	Brass
Dielectric Material	PTFE
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Not Yet Reviewed
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability
Product Compliance Disclaimer This information is provided based on reasonable inquiry of our suppliers and r based on the information they provided. This information is subject to change.	

RP-SMA RF Interface, Jack, 50 Ω , Threaded, 0 – 18 GHz Operating Frequency, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F]




EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



Customers Also Bought

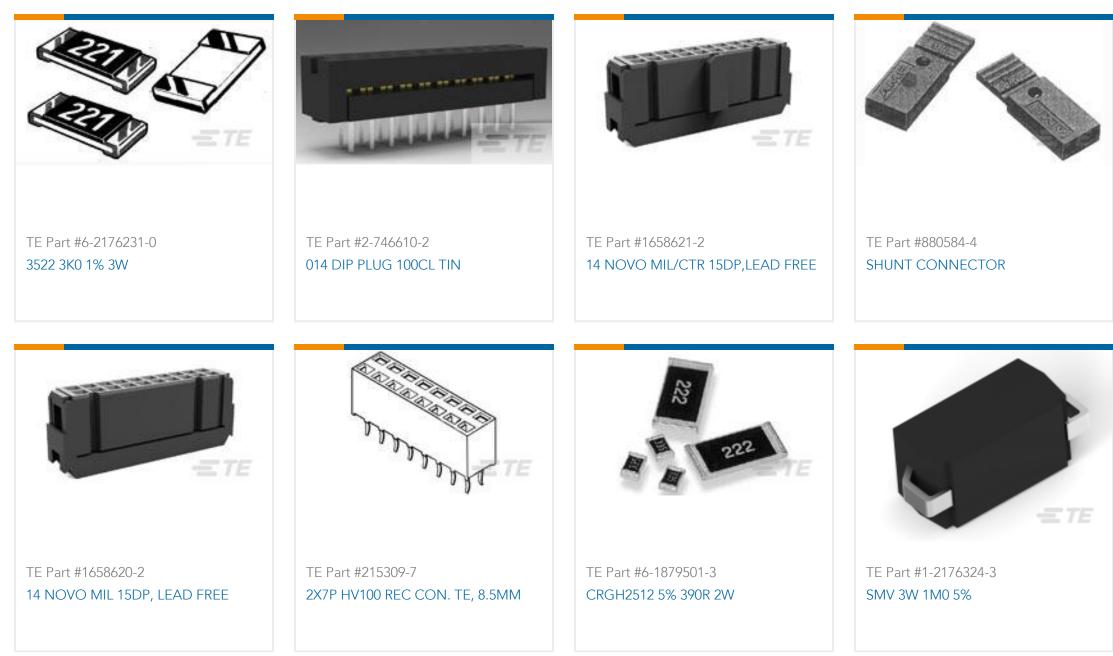

RP-SMA RF Interface, Jack, 50 Ω, Threaded, 0 – 18 GHz Operating Frequency, 1 Position, Printed Circuit Board, Board Mount, -65 – 165 °C [-85 – 329 °F]





Documents

Product Drawings RP-SMA Jack 50 Ohm .062 PCB Edge Mount

English

Datasheets & Catalog Pages RP-SMA FEMALE EDGE MULTI-MOUNT FOR 0.062 THICK BOARD

English