

MEAS | MEAS SM TE Internal #: SM1-25 TE Internal Description: STRING POT, 25 INCH RANGE Shielded Cable Mini String Pot

View on TE.com >



Sensors > Position Sensors > Potentiometer Sensors > Cable Actuated Position Sensors > Shielded Cable Mini String Pot



Cable Actuated Position Sensor Product Type: SM, Mini String Pot Series

Full Stroke Ranges: 63.5 – 635 mm [25 in]

Output Signal: Voltage Divider (Potentiometric)

Cable Actuated Position Sensor Accuracy: .25 % of FS

Repeatability: .02 % of FS

All Shielded Cable Mini String Pot (4)

Features

Product Type Features

Cable Actuated Position Sensor Product Type

SM, Mini String Pot Series

Signal Characteristics

JIC	411	יום	a	au	ເຕເ	ເວເເ	6
· · · ·	/						

Output Signal	Voltage Divider (Potentiometric)
Body Features	
Cable Actuated Position Sensor Housing Material	Polycarbonate + Stainless Mounting Bracket
Usage Conditions	
Operating Temperature Range	-18 – 71 °C[0 – 160 °F]
Operation/Application	
Resolution	Continuous Analog mm
Industry Standards	
IP Rating	IP50
Hazardous Area Approval	No
Other	
Full Stroke Ranges	63.5 – 635 mm[25 in]
Cable Actuated Position Sensor Accuracy	.25 % of FS



Repeatability	.02 % of FS				
Encoder Drive	No				
Measuring Cable	Nylon-Coated Stainless Steel				
Product Compliance					
Product Compliance					
For compliance documentation, visit the product page on TE.com>					
For compliance documentation, visit the product page on TE.com>					
·	Compliant with Exemptions				
For compliance documentation, visit the product page on TE.com>	Compliant with Exemptions Compliant with Exemptions				
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU					

(235)

Candidate List Declared Against: JAN 2023

(233)

SVHC > Threshold:

Pb (3.5% in Component a)

Pb (.4% in Component b)

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Yet Reviewed for halogen content

Solder Process Capability

Halogen Content

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




STRING POT, 25 INCH RANGE



Also in the Series | MEAS SM



Customers Also Bought

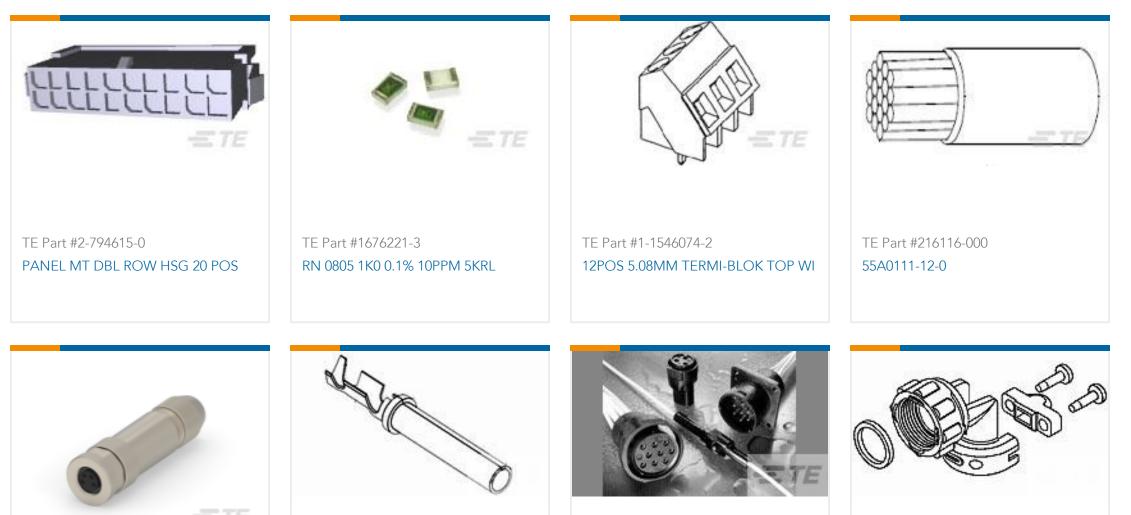

= /2			
TE Part #T4010019041-000	TE Part #776493-2	TE Part #207573-1	TE Part #796379-2
M8,SCREW, FEMALE,S,SHIELD,4P, GOLD	SOC, SF, SIZE 16, 18-20 AWG, NI/SN	RECEPT,7 POSN,ECONOSEAL	R/A STRN RELIEF KIT,SZ 11,CPC

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_SM1-25_1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_SM1-25_1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_SM1-25_1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

C For support call+1 800 522 6752

SM1-25

STRING POT, 25 INCH RANGE



SM1

English