HDP26-24-19SE-L024 - ACTIVE

DEUTSCH | DEUTSCH HD, DEUTSCH HDP

TE Internal #: YHDP26-24-19SEL024 Housing for Female Terminals, Wire-to-Wire, 19 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > DEUTSCH HDP20 Housings



Connector System: Wire-to-Wire Number of Positions: 19 Connector & Housing Type: Housing for Female Terminals Sealable: Yes

Mating Pin Diameter: 1.59 mm, 2.39 mm [.063 in, .094 in]

All DEUTSCH HDP20 Housings (324)

Connectivity

Features

Product Type Features

Mixed & Hybrid Connector	Yes
Connector Shape	Circular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Contact Retainer
Primary Locking Feature Configuration Features	Contact Retainer
	Contact Retainer 0
Configuration Features	
Configuration Features Blank Cavity Position	0

Housing for Female Terminals, Wire-to-Wire, 19 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid



Electrical Characteristics

Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V
Body Features	
Cable Exit Angle	180°
Primary Product Color	Black
Contact Features	
Contact Size	Size 12, Size 16
Contact Type	Socket
Mating Pin Diameter	1.59 mm, 2.39 mm[.063 in][.094 in]
Contact Current Rating (Max)	13 A, 25 A
Mechanical Attachment	
Terminal Position Assurance	No
Strain Relief	Add By Accessory
Mating Alignment Type	Guide Slot
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PAGF
Dimensions	
Connector Height	49.53 mm[1.95 in]
Product Width	49.53 mm[1.95 in]
Product Length	38.3 mm[1.508 in]
Compatible Insulation Diameter Range	1.35 – 3.05 mm, 2.46 – 4.01 mm[.053 – .12 in] [.097 – .158 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Degree of Protection	IP67

Housing for Female Terminals, Wire-to-Wire, 19 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid



UL Flammability Rating	20mm Flame Test per Standard UL-94
Packaging Features	
Packaging Quantity	1
Packaging Method	Box
Other	
Serviceable	Yes
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
•	
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant
For compliance documentation, visit the product page on TE.com>	Compliant Compliant
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	·

Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not Low Halogen - contains Br or Cl > 900 ppm.

Not reviewed for solder process capability

Halogen Content

Solder Process Capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Housing for Female Terminals, Wire-to-Wire, 19 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid



Compatible Parts

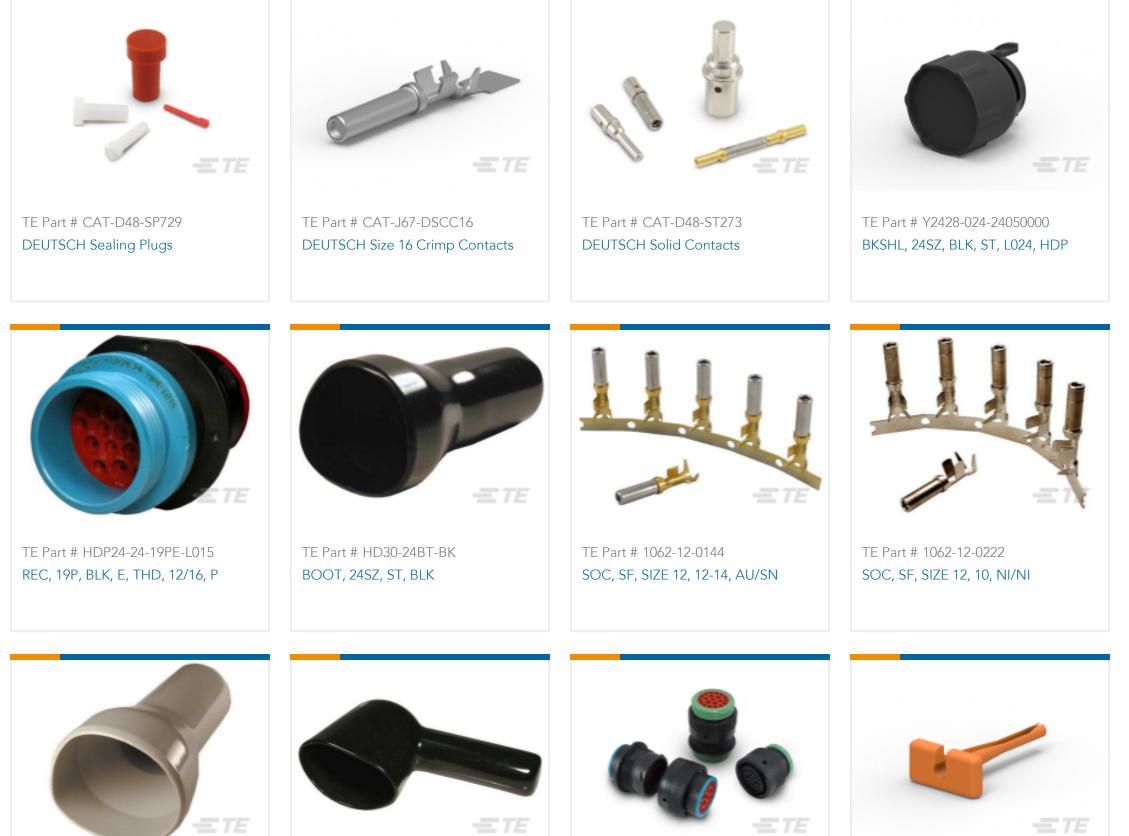


TE Part # HD30-24BT


TE Part # HD30-24BT-90-BK

TE Part # CAT-H396-CH8172

TE Part # 0411-337-1205

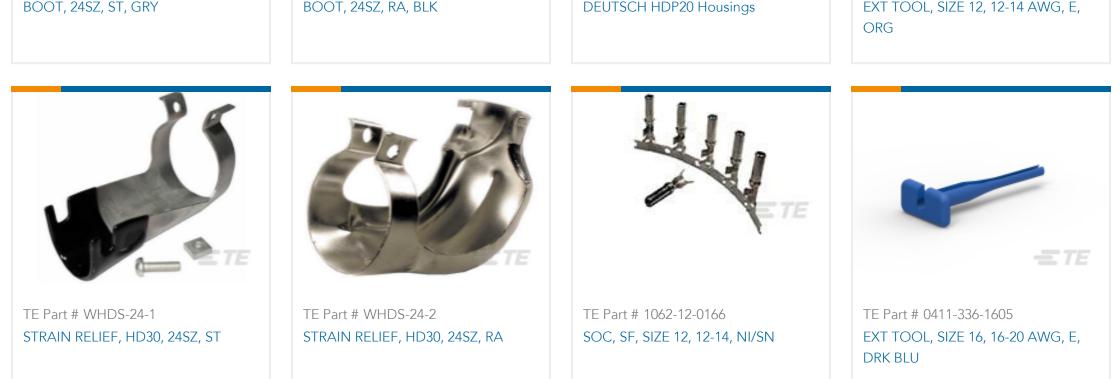


Also in the Series DEUTSCH HD

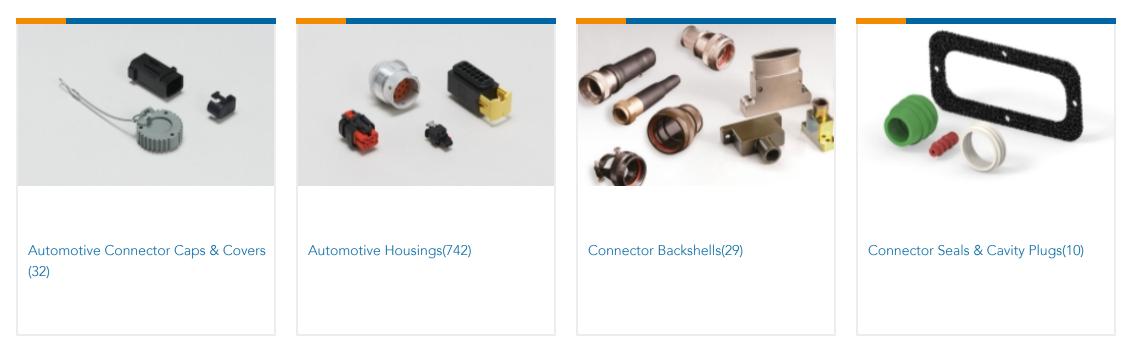


Housing for Female Terminals, Wire-to-Wire, 19 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid



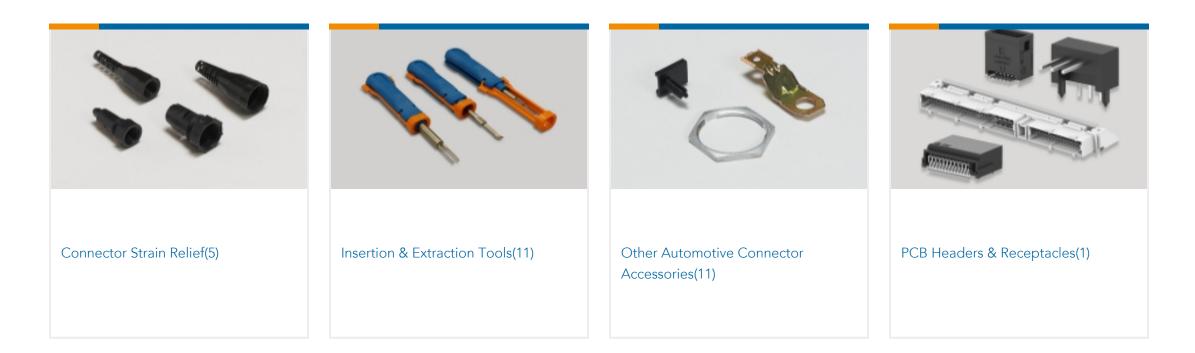

Also in the Series DEUTSCH HDP

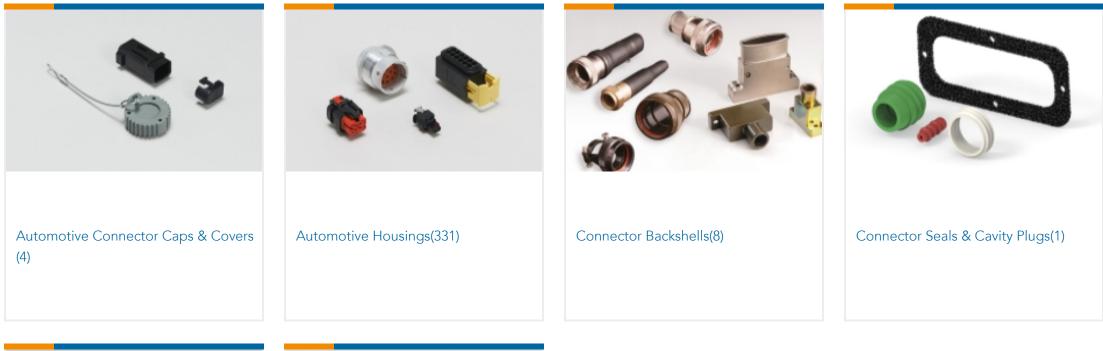





Insertion & Extraction Tools(11)

Other Automotive Connector Accessories(5)

Customers Also Bought





Housing for Female Terminals, Wire-to-Wire, 19 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid



Documents

Product Drawings PLG, 19P, BLK, E, WTHD, 12/16, S

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_YHDP26-24-19SEL024_B.2d_dxf.zip English Customer View Model ENG_CVM_CVM_YHDP26-24-19SEL024_B.3d_igs.zip English

Customer View Model

ENG_CVM_CVM_YHDP26-24-19SEL024_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

0

Product Specifications Application Specification

English

Agency Approvals UL Report

English