
PAF	RFB-1142-5						
REV	DESCRIPTION	DWN	DATE	APPROVED			
_	ENGINEERING RELEASE	CZ	10/21/21	JDMc			

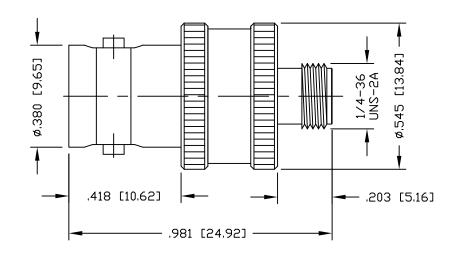

SPECIFICATIONS:

IMPEDANCE: 50 OHMS

WORKING VOLTAGE: 335 VRMS @ SEA LEVEL

FREQUENCY RANGE: 0-4 GHz

INSULATION RESISTANCE: 5k M Ohms min.

				DIMENSIONS ARE IN INCHES		ı	
5	PRESS FIT WASHER	1	BRASS	NICKEL	AND [MILLIME	eters]	ı
4	INSULATOR	1	PTFE	NATURAL	DRAWN	10/01/01	ı
3	CONTACT	1	Be.Cu.	GOLD	C. ZUÑIGA	10/21/21	l
2	INSULATOR	1	PTFE	NATURAL	CHECKED		ı
1	BODY	1	BRASS	NICKEL	ORJ DRAWN		ł
#	DESCRIPTION	QTY	MATERIAL	FINISH	C. ZUÑIGA	10/21/21	l
	•						Τ

CUSTOMER OUTLINE DRAWING

ALL DIMENSIONS ARE REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED:

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

PROPRIETARY AND CONFIDENTIAL

DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

RFINDUSTRIES.COM 7610 MIRAMAR RD. SAN DIEGO, CA 92126 (858) 549-6340

BNC JACK TO SMA (OKI) JACK

ADAPTER

	RFB-1142-5										
:	CABLE GROUP	CONTROL #	SCALE	FORMAT		SHEET		REVISION			
	l N/A	000000	NTS	Α	1	OF	1	_			