





PART NO.		RFT-1217-P		
REV	DESCRIPTION	DWN	DATE	APPROVED
B	UPDATED DWG & SPECS	CZ	11/11/21	JDMc

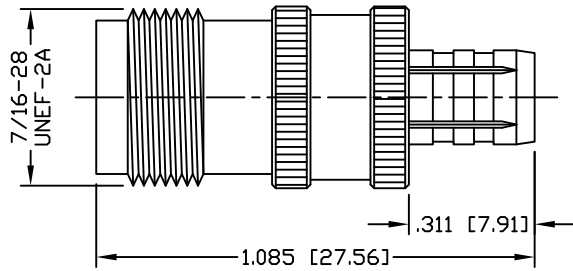

RECOMMENDED CRIMP DIE: .068"



RECOMMENDED CRIMP DIE: .255"

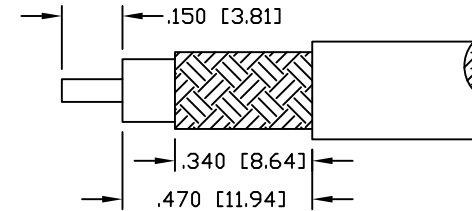

RECOMMENDED STRIPPING INSTRUCTIONS

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-7 GHz
 WORKING VOLTAGE: 500 V rms Max. @ Sea Level
 TEMPERATURE RANGE: -65°C TO 165°C
 FOR ANTENNA SPECIALIST K214 & PRO-FLEX 800, TIMES AA3096 CABLE

#	DESCRIPTION	QTY	MATERIAL	FINISH
5	COUPLING NUT	1	BRASS	NICKEL
4	FERRULE	1	BRASS	NICKEL
3	CONTACT	1	BRASS	GOLD
2	INSULATOR	1	DELTRIN	NATURAL
1	BODY	1	BRASS	NICKEL

CUSTOMER OUTLINE DRAWING	
ALL DIMENSIONS ARE REFERENCE ONLY	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MILLIMETERS]	
DRAWN C. ZUÑIGA	11/11/21
CHECKED	
ORJ DRAWN J. BENZ	12/22/92

RoHS COMPLIANT

PROPRIETARY AND CONFIDENTIAL

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

RFconnectors
 DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

RFINDUSTRIES.COM
 7610 MIRAMAR RD.
 SAN DIEGO, CA 92126
 (858) 549-6340

TNC FEMALE CRIMP
 RIGHT ANGLE

DWG # **RFT-1217-P**

CABLE GROUP P	CONTROL # 000000	SCALE NTS	FORMAT A	SHEET 1 OF 1	REVISION B
------------------	---------------------	--------------	-------------	-----------------	---------------