




PART NO.

RFU-601-4


REV	DESCRIPTION	DWN	DATE	APPROVED
C	UPDATED DWG FORMAT & SPECS	CZS	06/03/19	JDMc

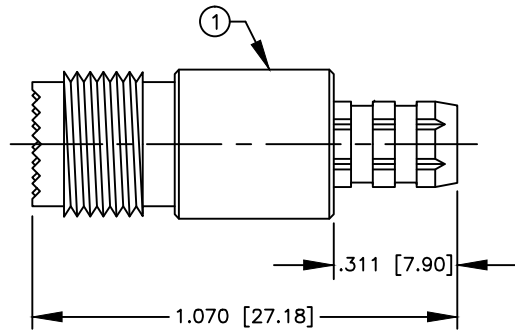

RECOMMENDED CRIMP DIE: .068"



RECOMMENDED CRIMP DIE: .255"

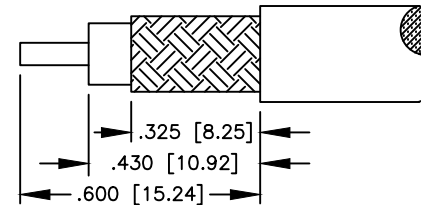

RECOMMENDED STRIPPING DIMENSIONS

SPECIFICATIONS:

IMPEDANCE: 50 Ohms

FREQUENCY RANGE: 0-2.5 GHz

WORKING VOLTAGE: 335 V rms Max. @ Sea Level

INSULATION RESISTANCE: 5k M Ohms min.

TEMPERATURE RANGE: -65°C TO 165°C

FOR RG-8/X, BELDEN 9258, MAXRAD M8X-100 &

M8X-1000, MICRO 8/U, REMEE 1600, SAXTON 8315,

TIMES LMR-240 & LMR-240 ULTRAFLEX CABLE

5	FERRULE	1	BRASS	NICKEL
4	PRESS FIT WASHER	1	BRASS	NICKEL
3	CONTACT	1	BRASS	SILVER
2	INSULATOR	1	DELTRIN	---
1	BODY	1	BRASS	NICKEL
#	DESCRIPTION	QTY	MATERIAL	FINISH

CUSTOMER
OUTLINE DRAWINGALL DIMENSIONS
ARE REFERENCE ONLYUNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
AND [MILLIMETERS]DRAWN
C. ZUNIGA 06/03/19

CHECKED

ORJ DRAWN
K. MAXWELL 1/29/96**RoHS
COMPLIANT**

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING CONTAINS
INFORMATION PROPRIETARY TO
RF INDUSTRIES. ANY
UNAUTHORIZED USE OF THIS
DRAWING IS EXPRESSLY
PROHIBITED WITHOUT WRITTEN
PERMISSION FROM RF
INDUSTRIES. ANY VIOLATION IS
PUNISHABLE UNDER U.S.
COPYRIGHT LAWS.

RFconnectors

DIVISION OF RF INDUSTRIES, LTD. (858) 549-6345 FAX

RFINDUSTRIES.COM
7610 MIRAMAR RD.
SAN DIEGO, CA 92126
(858) 549-6340**MINI UHF FEMALE
CRIMP**

CABLE GROUP	DWG #	REVISION
X	RFU-601-4	C
FORMAT	SCALE	CONTROL #
A	NTS	000000
SHEET 1 OF 1		