


- Compact DIP package  
13.2 x 9.1 x 10.2 mm
- I/O-isolation 1'600 VDC
- Fully regulated outputs
- Operating temperature range  
-40°C to +90°C without derating
- Short circuit protection
- Remote On/Off
- Designed to meet UL 62368-1  
(UL 60950-1)
- 3-year product warranty



The TDN 1WI Series comprises 1 Watt fully regulated, high performance DC/DC converters. They come in a compact cubical package of only 1.23 cm<sup>3</sup>. Full load operation is reliable up to 90°C environment temperature. With 1'600 VDC I/O-isolation voltage, external On/Off, and short current protection they cover a wide range of application when space is limited. The input of the converters is designed for a wide voltage range (4:1) and minimum load is not required.

The functional I/O-isolation system is designed to meet IEC/EN 62368-1 with a test voltage (60 s) of 1'600 VDC.

### Models

| Order Code   | Input Voltage Range           | Output 1 |                  | Output 2 |                  | Efficiency typ. |
|--------------|-------------------------------|----------|------------------|----------|------------------|-----------------|
|              |                               | Vnom     | I <sub>max</sub> | Vnom     | I <sub>max</sub> |                 |
| TDN 1-1210WI | 4.5 - 18 VDC<br>(12 VDC nom.) | 3.3 VDC  | 300 mA           |          |                  | 77 %            |
| TDN 1-1211WI |                               | 5 VDC    | 200 mA           |          |                  | 79 %            |
| TDN 1-1219WI |                               | 9 VDC    | 112 mA           |          |                  | 79 %            |
| TDN 1-1212WI |                               | 12 VDC   | 90 mA            |          |                  | 81 %            |
| TDN 1-1213WI |                               | 15 VDC   | 70 mA            |          |                  | 81 %            |
| TDN 1-1215WI |                               | 24 VDC   | 45 mA            |          |                  | 80 %            |
| TDN 1-1221WI |                               | +5 VDC   | 100 mA           | -5 VDC   | 100 mA           | 77 %            |
| TDN 1-1222WI |                               | +12 VDC  | 45 mA            | -12 VDC  | 45 mA            | 80 %            |
| TDN 1-1223WI |                               | +15 VDC  | 35 mA            | -15 VDC  | 35 mA            | 81 %            |
| TDN 1-2410WI | 9 - 36 VDC<br>(24 VDC nom.)   | 3.3 VDC  | 300 mA           |          |                  | 76 %            |
| TDN 1-2411WI |                               | 5 VDC    | 200 mA           |          |                  | 78 %            |
| TDN 1-2419WI |                               | 9 VDC    | 112 mA           |          |                  | 79 %            |
| TDN 1-2412WI |                               | 12 VDC   | 90 mA            |          |                  | 81 %            |
| TDN 1-2413WI |                               | 15 VDC   | 70 mA            |          |                  | 81 %            |
| TDN 1-2415WI |                               | 24 VDC   | 45 mA            |          |                  | 80 %            |
| TDN 1-2421WI |                               | +5 VDC   | 100 mA           | -5 VDC   | 100 mA           | 77 %            |
| TDN 1-2422WI |                               | +12 VDC  | 45 mA            | -12 VDC  | 45 mA            | 80 %            |
| TDN 1-2423WI |                               | +15 VDC  | 35 mA            | -15 VDC  | 35 mA            | 81 %            |
| TDN 1-4810WI | 18 - 75 VDC<br>(48 VDC nom.)  | 3.3 VDC  | 300 mA           |          |                  | 75 %            |
| TDN 1-4811WI |                               | 5 VDC    | 200 mA           |          |                  | 78 %            |
| TDN 1-4819WI |                               | 9 VDC    | 112 mA           |          |                  | 79 %            |
| TDN 1-4812WI |                               | 12 VDC   | 90 mA            |          |                  | 81 %            |
| TDN 1-4813WI |                               | 15 VDC   | 70 mA            |          |                  | 81 %            |
| TDN 1-4815WI |                               | 24 VDC   | 45 mA            |          |                  | 80 %            |
| TDN 1-4821WI |                               | +5 VDC   | 100 mA           | -5 VDC   | 100 mA           | 77 %            |
| TDN 1-4822WI |                               | +12 VDC  | 45 mA            | -12 VDC  | 45 mA            | 80 %            |
| TDN 1-4823WI |                               | +15 VDC  | 35 mA            | -15 VDC  | 35 mA            | 81 %            |

### Input Specifications

|                          |              |   |
|--------------------------|--------------|---|
| Input Current            | - At no load | 12 Vin models: <b>20 mA typ.</b><br>24 Vin models: <b>10 mA typ.</b><br>48 Vin models: <b>5 mA typ.</b>   |
| Surge Voltage            |              | 12 Vin models: <b>25 VDC max.</b> (1 s max.)<br>24 Vin models: <b>50 VDC max.</b> (1 s max.)<br>48 Vin models: <b>100 VDC max.</b> (1 s max.)   |
| Reflected Ripple Current |              | 12 Vin models: <b>15 mAp-p typ.</b><br>24 Vin models: <b>10 mAp-p typ.</b><br>48 Vin models: <b>5 mAp-p typ.</b>  |
| Recommended Input Fuse   |              | 12 Vin models: <b>500 mA</b> (slow blow)<br>24 Vin models: <b>315 mA</b> (slow blow)<br>48 Vin models: <b>160 mA</b> (slow blow)<br>(The need of an external fuse has to be assessed in the final application.) |
| Input Filter             |              | <b>Internal Capacitor</b>   |

### Output Specifications

|                          |   |   |
|--------------------------|---|---|
| Voltage Set Accuracy     |   | <b>±1% max.</b>   |
| Regulation               | - Input Variation (Vmin - Vmax)<br>- Load Variation (0 - 100%)<br>- Cross Regulation<br>(25% / 100% asym. load) | single output models: <b>0.2% max.</b><br>dual output models: <b>0.2% max.</b><br>single output models: <b>1% max.</b><br>dual output models: <b>1% max.</b> (Output 1)<br><b>1% max.</b> (Output 2)<br>dual output models: <b>5% max.</b>  |
| Ripple and Noise         | - 20 MHz Bandwidth  | <b>30 mVp-p typ.</b>  |
| Capacitive Load          | - single output<br><br><br><br><br><br><br><br><br><br>- dual output  | 3.3 Vout models: <b>1'680 µF max.</b><br>5 Vout models: <b>820 µF max.</b><br>9 Vout models: <b>630 µF max.</b><br>12 Vout models: <b>470 µF max.</b><br>15 Vout models: <b>330 µF max.</b><br>24 Vout models: <b>160 µF max.</b><br>5 / -5 Vout models: <b>470 / 470 µF max.</b><br>12 / -12 Vout models: <b>330 / 330 µF max.</b><br>15 / -15 Vout models: <b>220 / 220 µF max.</b> |
| Minimum Load             |   | <b>Not required</b>   |
| Temperature Coefficient  |   | <b>±0.02 %/K max.</b>   |
| Start-up Time            |   | <b>10 ms typ. / 20 ms max.</b>  |
| Short Circuit Protection |   | <b>Continuous, Automatic recovery</b>   |
| Transient Response       | - Response Time   | <b>500 µs typ.</b> (25% Load Step)  |

### Safety Specifications

|                  |                             |   |
|------------------|-----------------------------|---|
| Safety Standards | - IT / Multimedia Equipment | <b>Designed for EN 62368-1 (no certification)</b> |
|------------------|-----------------------------|---|

### EMC Specifications

|               |   |  |
|---------------|---|--|
| EMI Emissions | - Conducted Emissions<br><br>- Radiated Emissions | <b>EN 55032 class A</b> (with external filter)<br><b>EN 55032 class B</b> (with external filter)<br><b>EN 55032 class A</b> (with external filter)<br><b>EN 55032 class B</b> (with external filter) |
|               |   | External filter proposal: <a href="http://www.tracopower.com/overview/tdn1wi">www.tracopower.com/overview/tdn1wi</a>   |

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

|              |                             |   |
|--------------|-----------------------------|---|
| EMS Immunity | - Electrostatic Discharge   | Air: EN 61000-4-2, $\pm 8$ kV, perf. criteria A     |
|              | - RF Electromagnetic Field  | Contact: EN 61000-4-2, $\pm 6$ kV, perf. criteria A |
|              | - EFT (Burst) / Surge       | EN 61000-4-3, 10 V/m, perf. criteria A              |
|              |                             | EN 61000-4-4, $\pm 2$ kV, perf. criteria A          |
|              |                             | EN 61000-4-5, $\pm 1$ kV, perf. criteria A          |
|              | - Conducted RF Disturbances | Ext. input component: KY 220 $\mu$ F, 100 V         |
|              | - PF Magnetic Field         | EN 61000-4-6, 10 Vrms, perf. criteria A             |
|              |                             | Continuous: EN 61000-4-8, 100 A/m, perf. criteria A |
|              |                             | 1 s: EN 61000-4-8, 1000 A/m, perf. criteria A       |

### General Specifications

|                          |                                 |  |
|--------------------------|---------------------------------|--|
| Relative Humidity        |                                 | 95% max. (non condensing)  |
| Temperature Ranges       | - Operating Temperature         | -40°C to +90°C (without derating)  |
|                          | - Case Temperature              | +105°C max.  |
|                          | - Storage Temperature           | -55°C to +125°C  |
| Power Derating           | - High Temperature              | 6.67 %/K above 90°C  |
|                          | See application note:           | <a href="http://www.tracopower.com/overview/tdn1wi">www.tracopower.com/overview/tdn1wi</a>   |
| Cooling System           |                                 | Natural convection (20 LFM)  |
| Remote Control           | - Current Controlled Remote     | On: open circuit   |
|                          |                                 | Off: 2 to 4 mA current (no internal resistor)  |
|                          | External circuit proposal:      | <a href="http://www.tracopower.com/info/current-remote.pdf">www.tracopower.com/info/current-remote.pdf</a>   |
|                          | - Off Idle Input Current        | 2.5 mA max.  |
| Switching Frequency      |                                 | 100 kHz min. (PFM)   |
| Insulation System        |                                 | Functional Insulation  |
| Isolation Test Voltage   | - Input to Output, 60 s         | 1'600 VDC  |
| Isolation Resistance     | - Input to Output, 500 VDC      | 1'000 M $\Omega$ min.  |
| Isolation Capacitance    | - Input to Output, 100 kHz, 1 V | 50 pF max.   |
| Reliability              | - Calculated MTBF               | 8'400'000 h (MIL-HDBK-217F, ground benign)   |
| Washing Process          |                                 | According to Cleaning Guideline<br><a href="http://www.tracopower.com/info/cleaning.pdf">www.tracopower.com/info/cleaning.pdf</a>  |
| Environment              | - Vibration                     | MIL-STD-810F   |
|                          | - Thermal Shock                 | MIL-STD-810F   |
| Housing Material         |                                 | Non-conductive Plastic (UL 94 V-0 rated)   |
| Base Material            |                                 | Non-conductive Plastic (UL 94 V-0 rated)   |
| Potting Material         |                                 | Silicone (UL 94 V-0 rated)   |
| Pin Material             |                                 | Copper   |
| Pin Foundation Plating   |                                 | Nickel (2 - 3 $\mu$ m)   |
| Pin Surface Plating      |                                 | Tin (3 - 5 $\mu$ m), matte   |
| Housing Type             |                                 | Plastic Case   |
| Mounting Type            |                                 | PCB Mount  |
| Connection Type          |                                 | THD (Through-Hole Device)  |
| Footprint Type           |                                 | DIP8   |
| Soldering Profile        |                                 | Lead-Free Wave Soldering<br>260°C / 6 s max.   |
| Weight                   |                                 | 2.7 g  |
| Environmental Compliance | - REACH Declaration             | <a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a><br>REACH SVHC list compliant<br>REACH Annex XVII compliant  |
|                          | - RoHS Declaration              | <a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a><br>Exemptions: 7a, 7c-I<br>(RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule).) |
|                          | - SCIP Reference Number         | f5326c8e-7816-49b5-ae14-a354e8cb08f7   |


All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

### Supporting Documents

[Overview Link](#) (for additional Documents)

[www.tracopower.com/overview/tdn1wi](http://www.tracopower.com/overview/tdn1wi)

### Outline Dimensions

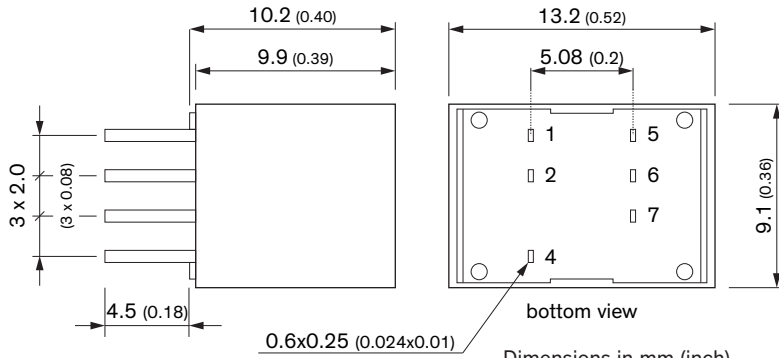

| Pinout |               |               |
|--------|---------------|---------------|
| Pin    | Single        | Dual          |
| 1      | +Vin (Vcc)    | +Vin (Vcc)    |
| 2      | -Vin (GND)    | -Vin (GND)    |
| 4      | Remote On/Off | Remote On/Off |
| 5      | NC            | -Vout         |
| 6      | -Vout         | Common        |
| 7      | +Vout         | +Vout         |

NC: Not connected