


USB 2.0 A to B Cable (M/M), Beige, 15 ft. (4.57 m)

MODEL NUMBER: **U022-015-BE**

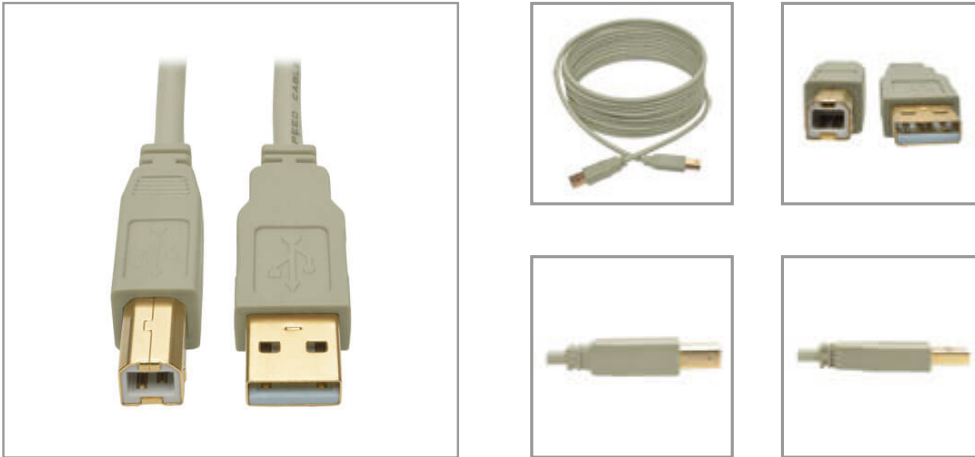

Connects high-speed USB 2.0 peripherals with a USB-B port to your computer, laptop or other compatible USB-A device. Recommended for printers and scanners.

Description

The U022-015-BE USB 2.0 Hi-Speed A/B Cable (M/M) connects your computer, laptop or other compatible USB-A device to a USB-B peripheral, such as printers and scanners. This 15-ft. (4.57 m) cable supports data transfer rates up to 480 Mbps for both low- and high-speed devices, including multimedia applications.

Premium foil and braid shielding delivers reliable, error-free signal quality and protection from EMI/RFI interference. Molded gold-plated connectors with gold-plated contacts ensure excellent conductivity. Integral strain relief ensures the cable and connectors last a long time. A rugged PVC jacket protects twisted 28 AWG data lines and 24 AWG power lines.

Features

Connect Your USB Type-B Peripherals to Your Computer

- Recommended for printers and scanners
- Supports data transfer rates up to 480 Mbps
- Backward compatible with earlier USB generations

First-Rate Construction for Superior Signal Transfer

- Premium foil and braid shielding for EMI/RFI noise protection
- Molded nickel-plated connectors for optimal signal quality
- Integral strain relief for long life
- Twisted 28/24 AWG data/power lines
- Flexible PVC jacket easy to install in tight spaces

Specifications

Highlights

- Supports data transfer rates up to 480 Mbps
- Premium foil and braid shielding
- Gold-plated connectors and contacts
- Twisted 28/24 AWG data/power lines
- Backward compatible with earlier USB generations

Package Includes

- U022-015-BE USB 2.0 Hi-Speed A/B Cable (M/M), Beige, 15-ft. (4.57 m)

OVERVIEW

UPC Code

037332198808

| | |
|-------------------------------------|------------------------------|
| Technology | USB 2.0 (High Speed) |
| Cable Type | Passive |
| PHYSICAL | |
| Cable Jacket Color | Beige |
| Cable Length (ft.) | 15 |
| Cable Length (m) | 4.57 |
| Shipping Dimensions (hwd / in.) | 0.50 x 5.20 x 9.20 |
| Shipping Dimensions (hwd / cm) | 1.27 x 13.21 x 23.37 |
| Shipping Weight (lbs.) | 0.50 |
| Shipping Weight (kg) | 0.23 |
| ENVIRONMENTAL | |
| Operating Temperature Range | 14° to 122°F (-10° to 50°C) |
| Storage Temperature Range | 5° to 140°F (-15° to 60°C) |
| Operating Humidity Range | 0% to 90% RH, Non-Condensing |
| Storage Humidity Range | 0% to 90% RH, Non-Condensing |
| CONNECTIONS | |
| Side A - Connector 1 | USB A (MALE) |
| Side B - Connector 1 | USB B (MALE) |
| Connector Style | Straight |
| STANDARDS & COMPLIANCE | |
| Product Compliance | RoHS |
| WARRANTY & SUPPORT | |
| Product Warranty Period (Worldwide) | Lifetime limited warranty |