



TOROIDAL CHOKE

VTCB4728-101-6A

- Solid base for stable mounting
- Fixed pins for easy PCB insertion
- Operating Temperature Range: -20°C to +125°C




Electrical Specifications @25°C		
Inductance @ 10KHz, 1.0V 0A DC	Inductance @ 10KHz, 1.0V 6.5A DC	DCR (mΩ) Max
107μH ±15%	100.0μH ±10%	22.0

All specifications subject to change without notice.

MECHANICAL

Dimensions:  $\frac{\text{inch}}{\text{mm}}$

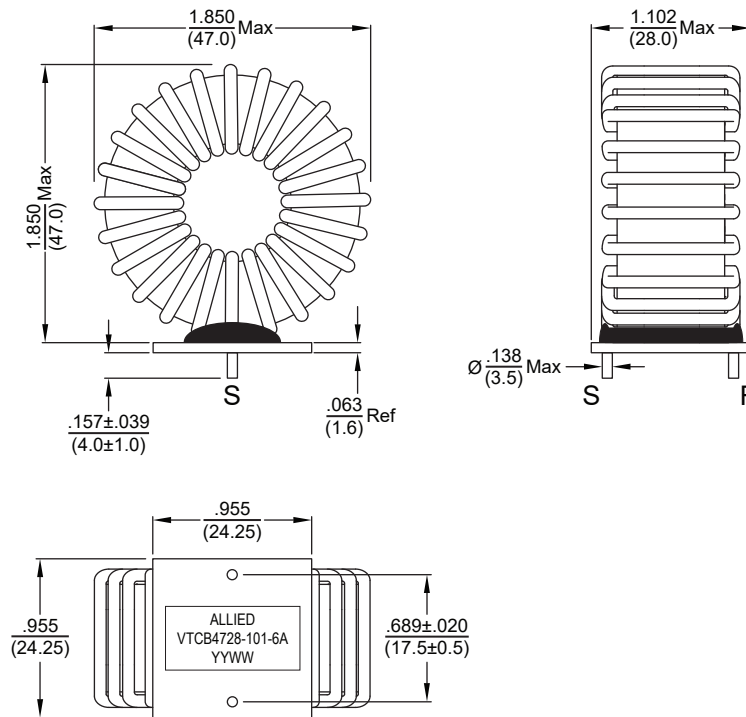

SCHEMATICS

