## SIEMENS

## Data sheet

## 3RV2011-0FA20



Circuit breaker size S00 for motor protection, CLASS 10 A-release 0.35...0.5 A N-release 6.5 A Spring-type terminal Standard switching capacity

product brand name	SIRIUS			
product designation	Circuit breaker			
design of the product	For motor protection			
product type designation	3RV2			
General technical data				
size of the circuit-breaker	S00			
size of contactor can be combined company-specific	S00, S0			
product extension auxiliary switch	Yes			
power loss [W] for rated value of the current				
<ul> <li>at AC in hot operating state</li> </ul>	5.5 W			
<ul> <li>at AC in hot operating state per pole</li> </ul>	1.8 W			
insulation voltage with degree of pollution 3 at AC rated value	690 V			
surge voltage resistance rated value	6 kV			
shock resistance according to IEC 60068-2-27	25g / 11 ms			
mechanical service life (switching cycles)				
<ul> <li>of the main contacts typical</li> </ul>	100 000			
<ul> <li>of auxiliary contacts typical</li> </ul>	100 000			
electrical endurance (switching cycles) typical	100 000			
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD			
certificate of suitability according to ATEX directive 2014/34/EU	DMT 02 ATEX F 001			
reference code according to IEC 81346-2	Q			
Substance Prohibitance (Date)	10/01/2009			
Ambient conditions				
installation altitude at height above sea level maximum	2 000 m			
ambient temperature				
<ul> <li>during operation</li> </ul>	-20 +60 °C			
<ul> <li>during storage</li> </ul>	-50 +80 °C			
<ul> <li>during transport</li> </ul>	-50 +80 °C			
relative humidity during operation	10 95 %			
Main circuit				
number of poles for main current circuit	3			
adjustable current response value current of the current-dependent overload release	0.35 0.5 A			
operating voltage				
<ul> <li>rated value</li> </ul>	20 690 V			
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V			
<ul> <li>at AC-3e rated value maximum</li> </ul>	690 V			

operating frequency rated value	50 60 Hz
operational current rated value	0.5 A
operational current	
<ul> <li>at AC-3 at 400 V rated value</li> </ul>	0.5 A
<ul> <li>at AC-3e at 400 V rated value</li> </ul>	0.5 A
operating power	
• at AC-3	
— at 230 V rated value	0.1 kW
— at 400 V rated value	0.12 kW
— at 500 V rated value	0.1 kW
— at 690 V rated value	0.2 kW
• at AC-3e	
— at 230 V rated value	0.1 kW
— at 400 V rated value	0.12 kW
— at 500 V rated value	0.1 kW
— at 690 V rated value	0.2 kW
operating frequency	
• at AC-3 maximum	15 1/h
• at AC-3e maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts	0
Protective and monitoring functions	
product function	
<ul> <li>ground fault detection</li> </ul>	No
<ul> <li>phase failure detection</li> </ul>	Yes
trip class	CLASS 10
design of the overload release	thermal
breaking capacity maximum short-circuit current (lcu)	
at AC at 240 V rated value	100 kA
• at AC at 400 V rated value	100 kA
• at AC at 500 V rated value	100 kA
• at AC at 690 V rated value	100 kA
breaking capacity operating short-circuit current (Ics) at AC	
<ul> <li>at 240 V rated value</li> </ul>	100 kA
<ul> <li>at 400 V rated value</li> </ul>	100 kA
at 500 V rated value	100 kA
at 690 V rated value	100 kA
response value current of instantaneous short-circuit trip	6.5 A
unit	
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
at 480 V rated value	0.5 A
at 600 V rated value	0.5 A
Short-circuit protection	V
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
design of the fuse link for IT network for short-circuit protection of the main circuit	
• at 690 V	gL/gG 4 A
Installation/ mounting/ dimensions	
mounting position	any
fastening method	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715
height	106 mm
width	45 mm
depth	97 mm
required spacing	

<ul> <li>for grounded parts at 400 V</li> </ul>	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for live parts at 400 V	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
<ul> <li>for grounded parts at 500 V</li> </ul>	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
• for live parts at 500 V	
— downwards	30 mm
— upwards	30 mm
— at the side	9 mm
<ul> <li>for grounded parts at 690 V</li> </ul>	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
• for live parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
Connections/ Terminals	
type of electrical connection	
type of electrical connection • for main current circuit	spring-loaded terminals
	spring-loaded terminals Top and bottom
• for main current circuit arrangement of electrical connectors for main current circuit	
• for main current circuit arrangement of electrical connectors for main current	
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections	Top and bottom
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections         • for main contacts             — solid or stranded	Top and bottom 2x (0,5 4 mm <sup>2</sup> )
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections         • for main contacts             — solid or stranded             — finely stranded with core end processing	Top and bottom 2x (0,5 4 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> )
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections         • for main contacts             — solid or stranded	Top and bottom 2x (0,5 4 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> )
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections         • for main contacts             — solid or stranded             — finely stranded with core end processing             — finely stranded without core end processing	Top and bottom 2x (0,5 4 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> )
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections         • for main contacts             — solid or stranded             — finely stranded with core end processing             — finely stranded without core end processing             • at AWG cables for main contacts	Top and bottom 2x (0,5 4 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (20 12)
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections         • for main contacts	Top and bottom 2x (0,5 4 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (20 12) Diameter 3 mm
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections         • for main contacts             solid or stranded             finely stranded with core end processing             finely stranded without core end processing             • at AWG cables for main contacts             design of screwdriver shaft             size of the screwdriver tip	Top and bottom 2x (0,5 4 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (20 12) Diameter 3 mm
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections         • for main contacts	Top and bottom 2x (0,5 4 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (20 12) Diameter 3 mm
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections         • for main contacts	Top and bottom 2x (0,5 4 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections         • for main contacts             — solid or stranded             — finely stranded with core end processing             — finely stranded without core end processing             • at AWG cables for main contacts             design of screwdriver shaft             size of the screwdriver tip             Safety related data             B10 value             • with high demand rate according to SN 31920	Top and bottom 2x (0,5 4 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections         • for main contacts             solid or stranded             finely stranded with core end processing             finely stranded without core end processing             • at AWG cables for main contacts         design of screwdriver shaft         size of the screwdriver tip         Safety related data         B10 value             • with high demand rate according to SN 31920         proportion of dangerous failures	Top and bottom 2x (0,5 4 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm 5 000
for main current circuit     arrangement of electrical connectors for main current     circuit     type of connectable conductor cross-sections <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> <li>design of screwdriver shaft         <ul> <li>size of the screwdriver tip</li> </ul> </li> <li>Safety related data         <ul> <li>B10 value</li> <li>with high demand rate according to SN 31920</li> <li>proportion of dangerous failures</li> <li>with low demand rate according to SN 31920</li> <li>failure rate [FIT]</li> </ul> </li>	Top and bottom 2x (0,5 4 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm 5 000 50 % 50 %
<ul> <li>for main current circuit</li> <li>arrangement of electrical connectors for main current circuit</li> <li>type of connectable conductor cross-sections         <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>design of screwdriver shaft</li> <li>size of the screwdriver tip</li> <li>Safety related data</li> <li>B10 value         <ul> <li>with high demand rate according to SN 31920</li> <li>with low demand rate according to SN 31920</li> <li>failure rate [FIT]</li> <li>with low demand rate according to SN 31920</li> </ul> </li> </ul>	Top and bottom 2x (0,5 4 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm 5 000 50 % 50 % 50 % 50 FIT
<ul> <li>for main current circuit</li> <li>arrangement of electrical connectors for main current circuit</li> <li>type of connectable conductor cross-sections         <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>design of screwdriver shaft</li> <li>size of the screwdriver tip</li> <li>Safety related data</li> <li>B10 value         <ul> <li>with high demand rate according to SN 31920</li> <li>proportion of dangerous failures</li> <li>with low demand rate according to SN 31920</li> <li>failure rate [FIT]</li> <li>with low demand rate according to SN 31920</li> </ul> </li> </ul>	Top and bottom 2x (0,5 4 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm 5 000 50 % 50 % 50 % 50 FIT 10 y
<ul> <li>for main current circuit</li> <li>arrangement of electrical connectors for main current circuit</li> <li>type of connectable conductor cross-sections         <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>design of screwdriver shaft</li> <li>size of the screwdriver tip</li> <li>Safety related data</li> <li>B10 value         <ul> <li>with high demand rate according to SN 31920</li> <li>proportion of dangerous failures</li> <li>with low demand rate according to SN 31920</li> <li>failure rate [FIT]                 <ul> <li>with low demand rate according to SN 31920</li> <li>T1 value for proof test interval or service life according to IEC 60529</li> <li>protection class IP on the front according to IEC 60529</li> <li>wite low demand rate according to IEC 60529</li></ul></li></ul></li></ul>	Top and bottom 2x (0,5 4 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm 5 000 50 % 50 % 50 % 50 FIT 10 y IP20
<ul> <li>for main current circuit</li> <li>arrangement of electrical connectors for main current circuit</li> <li>type of connectable conductor cross-sections         <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>design of screwdriver shaft</li> <li>size of the screwdriver tip</li> <li>Safety related data</li> <li>B10 value         <ul> <li>with high demand rate according to SN 31920</li> <li>proportion of dangerous failures</li> <li>with high demand rate according to SN 31920</li> <li>failure rate [FIT]</li> <li>with low demand rate according to SN 31920</li> </ul> </li> <li>T1 value for proof test interval or service life according to IEC 60529</li> <li>touch protection on the front according to IEC 60529</li> </ul>	Top and bottom         2x (0,5 4 mm²)         2x (0.5 2.5 mm²)         2x (20 2.5 mm²)         2x (20 12)         Diameter 3 mm         3,0 x 0,5 mm         5 000         50 %         50 %         50 FIT         10 y         IP20         finger-safe, for vertical contact from the front
<ul> <li>for main current circuit</li> <li>arrangement of electrical connectors for main current circuit</li> <li>type of connectable conductor cross-sections         <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>design of screwdriver shaft</li> <li>size of the screwdriver tip</li> <li>Safety related data</li> <li>B10 value         <ul> <li>with high demand rate according to SN 31920</li> <li>proportion of dangerous failures</li> <li>with low demand rate according to SN 31920</li> </ul> </li> <li>failure rate [FIT]         <ul> <li>with low demand rate according to SN 31920</li> </ul> </li> <li>T1 value for proof test interval or service life according to IEC 60529</li> <li>touch protection on the front according to IEC 60529</li> <li>display version for switching status</li> </ul>	Top and bottom 2x (0,5 4 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (0.5 2.5 mm <sup>2</sup> ) 2x (20 12) Diameter 3 mm 3,0 x 0,5 mm 5 000 50 % 50 % 50 % 50 FIT 10 y IP20
<ul> <li>for main current circuit</li> <li>arrangement of electrical connectors for main current circuit</li> <li>type of connectable conductor cross-sections         <ul> <li>for main contacts</li> <li>solid or stranded</li> <li>finely stranded with core end processing</li> <li>at AWG cables for main contacts</li> </ul> </li> <li>design of screwdriver shaft</li> <li>size of the screwdriver tip</li> <li>Safety related data</li> <li>B10 value         <ul> <li>with high demand rate according to SN 31920</li> <li>proportion of dangerous failures</li> <li>with high demand rate according to SN 31920</li> <li>failure rate [FIT]</li> <li>with low demand rate according to SN 31920</li> </ul> </li> <li>T1 value for proof test interval or service life according to IEC 60529</li> <li>touch protection on the front according to IEC 60529</li> </ul>	Top and bottom         2x (0,5 4 mm²)         2x (0.5 2.5 mm²)         2x (20 2.5 mm²)         2x (20 12)         Diameter 3 mm         3,0 x 0,5 mm         5 000         50 %         50 %         50 FIT         10 y         IP20         finger-safe, for vertical contact from the front

	<u>Confirmation</u>	CCC CCC	(UL) UL	<u>KC</u>	EAC	
For use in hazardou	us locations	Declaration of Conf	ormity	Test Certificates		
IECEX	K ATEX	UK CA	CE EG-Konf.	<u>Special Test Certific-</u> <u>ate</u>	<u>Type Test Certific-</u> ates/Test Report	
Marine / Shipping						
ABS	BUREAU VERITAS		Hoyds Register urs	PRS	RINA	
Marine / Shipping	other		Railway			
RMRS	<u>Confirmation</u>	VDE	<u>Confirmation</u>	<u>Vibration and Shock</u>		
Further information						
Information- and Downloadcenter (Catalogs, Brochures,) https://www.siemens.com/ic10 Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2011-0FA20 Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2011-0FA20						

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-0FA20


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2011-0FA20&lang=en


Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RV2011-0FA20/char

Further characteristics (e.g. electrical endurance, switching frequency) http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2011-0FA20&objecttype=14&gridview=view1

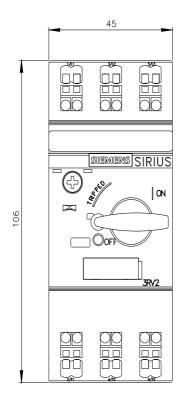

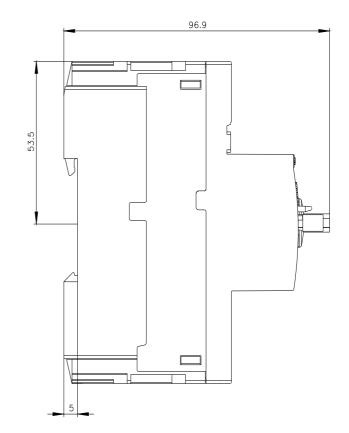

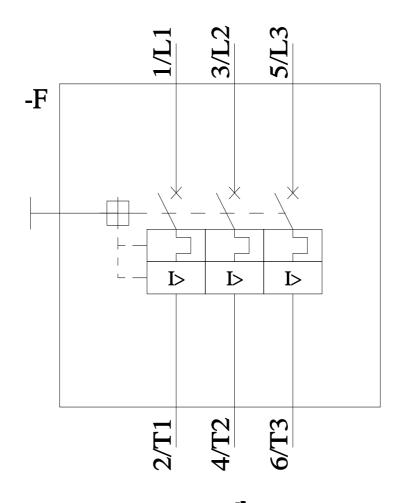

last modified:

6/25/2022 🖸