



1955 MHz Cavity Band Pass Filter

Part Number: AE1955B10877



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Electrical Specifications

- Center Frequency: 1955 MHz
- Bandwidth: 490 MHz
- Passband: 1710-2200 MHz
- Insertion Loss: 1 dB Max
- Return Loss: 15 dB Min
- Rejection: 30 dB @ 1660 MHz
30 dB @ 2250 MHz
- Power Handling: 100 Watts Max


Mechanical

- Connector Type: SMA (F)
- Dimensions: 7.2 x 1.9 x 1.03 Inches

Environmental

- Operating Temperature: -40 to +80° C

Outline Drawing:

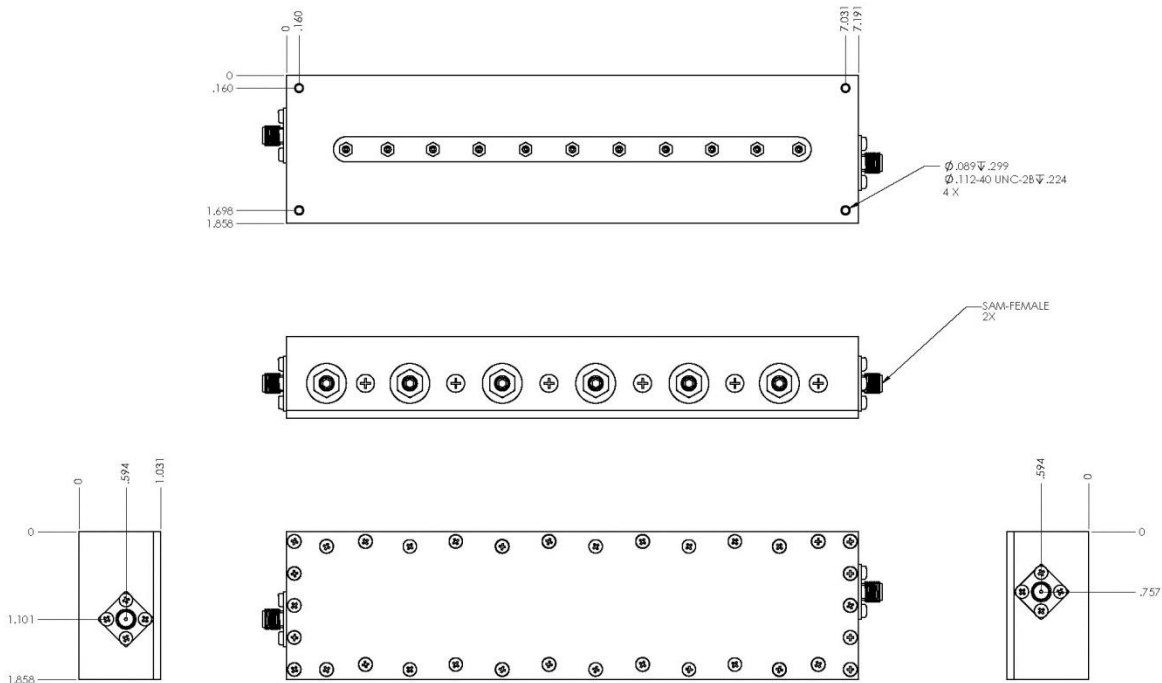



1955 MHz Cavity Band Pass Filter



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

Part Number: AE1955B10877

Response Plot:

