

Drawing No.	*Rev	Date	Page
AL1411A-WWL-20mA	Е	2020/10/28	1/12

LED APPROVAL SHEET

Part No:

AL1411A-WWL-20mA

NOTE:

Green Part


MAKER			CUSTOMER		
1.	// SOLIDLI	Œ			
R&D	QA	Sales	Checked	Approved	
Oky	part	3/			

Prepared	Checked	Approved
Rachel Lee	Sky Lin	Kenneth Wu



Drawing No.	*Rev	Date	Page
AL1411A-WWL-20mA	E	2020/10/28	2/12

Description of P/N No.

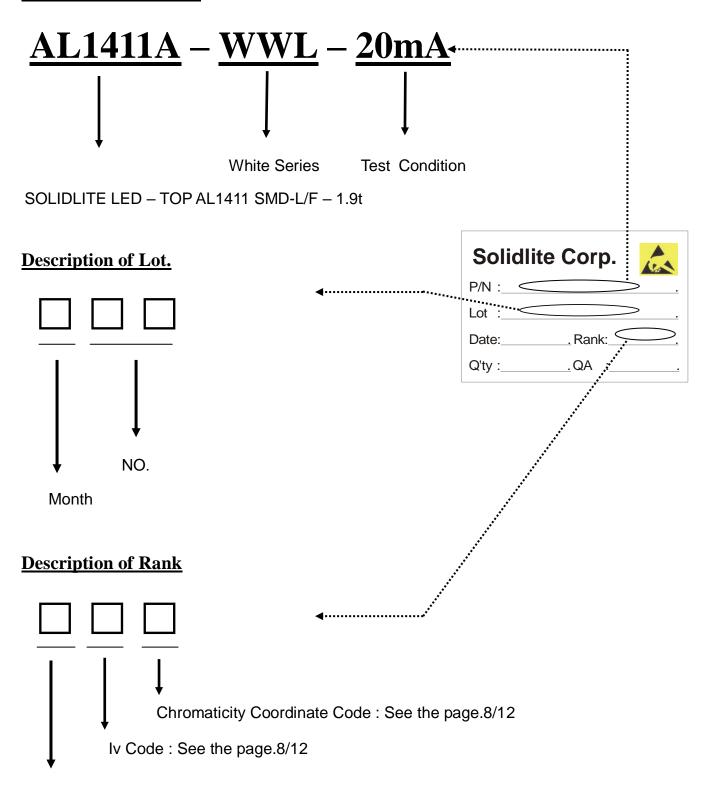

Vf Code: See the page.8/12



Drawing No.	*Rev Date Pa		Page
AL1411A-WWL-20mA	E	2020/10/28	3/12

Absolute Maximum Ratings at T_A=25°C

Parameter	MAX.	Unit	
DC forward current	30	mA	
Power Dissipation	105	mW	
Pulse Current (1/10 duty,100ms Pulse width)	100	mA	
Reverse Voltage (V _r)	5	V	
Electrostatic Discharge Classification(HBM)	± 500V		
Operating Temperature Range	-40°C to +85°C		
Storage Temperature Range	-55°C to +100°C		
Lead Soldering Temperature	245°C for 10 seconds		


Electrical and Optical Characteristics at $T_A = 25^{\circ}C$

Parameter	Test Condition	Symbol	Min.	Тур.	Max.	Unit
Chromoticity Coordinate#	I -20m A	CIE-X	0.281		0.367	
Chromaticity Coordinate [#]	$I_{\mathrm{F}}\!\!=\!\!20\mathrm{mA}$	CIE-Y	0.270		0.415	-
Forward Voltage	I _F =20mA	$\mathbf{V_F}$	3.0		3.5	V
Reverse Current	$V_R=5V$	I_R			10	μA
Luminous Intensity	I _F =20mA	Iv	2100	_	3100	mcd
Luminous Flux	I _F =20mA	Фγ		5.0		lm
Viewing Angle	I _F =20mA	2 ⊖ 1/2		120		deg


^{#:}Please refer to CIE 1931 chromaticity diagram.

Recommend forward current for longer duration is 20mA.

Package outline dimensions:

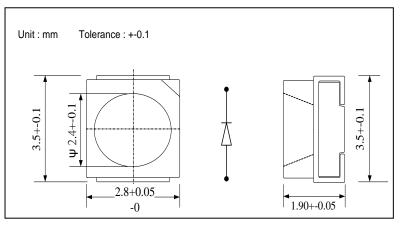

Recommended pad:



These values measured by Optical Spectrum Analyzer of SOLIDLITE.




Drawing No.	*Rev	Date	Page
AL1411A-WWL-20mA	E	2020/10/28	4/12


Typical Electrical / Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)


Luminous Intensity vs.




Forward Current vs.
Ambient Temperature




Duty Ratio vs.
Allowable Forward Current




Relative Intensity vs. Forward Current



Forward Current vs. Forward Voltage




Forward Voltage vs. Ambient Temperature





Drawing No.	*Rev	Date	Page
AL1411A-WWL-20mA	Е	2020/10/28	5/12

Spatial Distribution

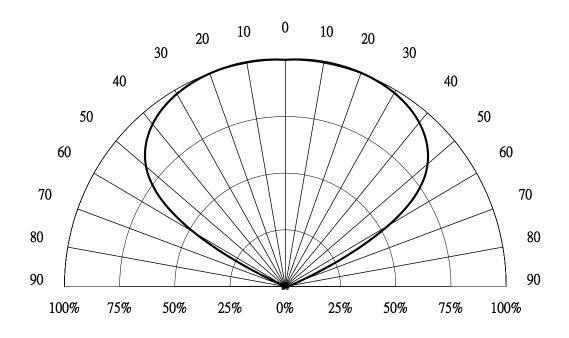



Drawing No.	*Rev	Rev Date I	
AL1411A-WWL-20mA	E	2020/10/28	6/12

Surface Mounting Condition

In automatic mounting of the SMD LEDs on printed circuit boards, any bending, expanding and pulling forces or shock against the SMD LEDs shall be kept min. to prevent them from electrical failures and mechanical damages of the devices.

Soldering Reflow


Soldering of the SMD LEDs shall conform to the soldering condition in the individual specifications. SMD LEDs are designed for Reflow Soldering.

In the reflow soldering, too high temperature and too large temperature gradient such as rapid heating / cooling may cause electrical & optical failure and damages of the devices.

Solidlite can not quarantee the LED after they have been assembled using the solder dipping method.

commended Soldering Temperature _ Time Profile (Reflow Soldering)

Lead Free Solder				
Pre-heat	150~200 ℃			
Pre-heat time	120 sec. Max.			
Peak-Temperature	245 ℃ Max.			
Soldering time Condition	10 sec. Max.			

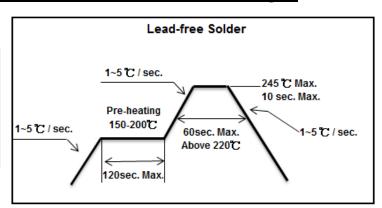

Reliability Test Item and Conditions

· Results of Reliability Test

No	Item	Test Condition	Test Hours/Cycles	Sample No	Ac / Re
1	DC Operating Life	I _F : 20mA	1,000 HRS	50 PCS	0 / 1
2	Pulse Life Test	1/2 duty,10 ms pulse width	500 HRS	50 PCS	0 / 1
3	High Temperature Storage	Temp: 100°C	1,000 HRS	50 PCS	0 / 1
4	Low Temperature Storage	Temp : -55°C	1,000 HRS	50 PCS	0 / 1
5	Thermal Shock Test	-40°C ← 80°C 5min 8secs 5min	100 CYCLES	50 PCS	0 / 1
6	Temperature Cycle	-40°C ~25°C ~100°C ~25°C 30min 5min 30min 5min	300 CYCLES	50 PCS	0 / 1
7	Temp. & Humidity	TA=85°C,RH=85%	1,000 HRS	50 PCS	0 / 1

• The Reliability Criteria of SMD LED

Item	Item Symbol Test Coundition		Limit		
Item			Min.	Max.	
Forward Voltage	V_{F}	I _F : 20mA	-	U.S.L*1.1	
Reverse Current	I_R	$V_R:5V$	-	U.S.L*2	
Luminous Intensity	I_V	I _F : 20mA	L.S.L.*0.5		


*U.S.L. : Upper Standard Level

*L.S.L.: Lower Standard Level




Drawing No.	*Rev	Date	Page
AL1411A-WWL-20mA	ш	2020/10/28	7/12

Package Reel & Static Shielding Bag Dimensions:

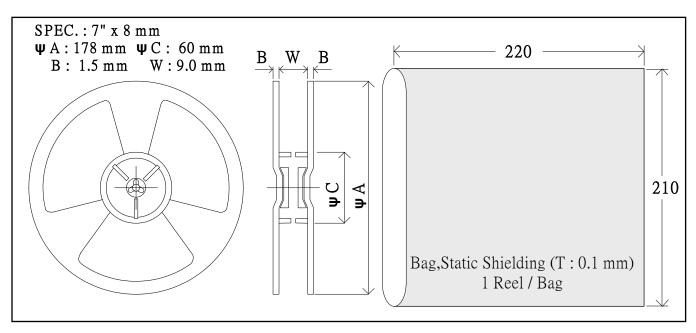

Package Carrier Tape Dimensions: 2,000 pcs/Reel

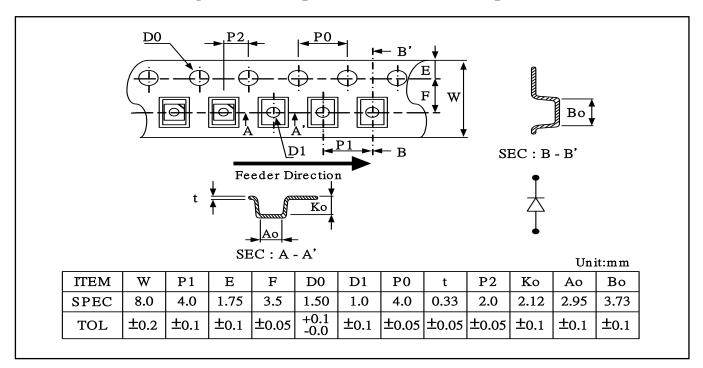



Drawing No.	*Rev	Date	Page
AL1411A-WWL-20mA	E	2020/10/28	8/12

Ranks Combination

Vf		A1	A2	A3	A4	A5
V _F @20mA	(Voltage)	3.0~3.1	3.1~3.2	3.2~3.3	3.3~3.4	3.4~3.5

Luminous 1	Intensity	CK	CL	CM	CN	СР	CQ
Iv@20mA	(mcd)	2100~2200	2200~2300	2300~2400	2400~2500	2500~2600	2600~2700
Luminous 1	Intensity	CR	CS	СТ	CU	-	-
Iv@20mA	(mcd)	2700~2800	2800~2900	2900~3000	3000~3100	-	-

Chromaticity	Coordinate [#]	BA	BB	ВС	BD	BE	BF
		(0.281,0.285)	(0.287, 0.294)	(0.293, 0.303)	(0.299,0.312)	(0.305, 0.322)	(0.313,0.334)
CIE	X/Y)	(0.287, 0.294)	(0.293, 0.303)	(0.299, 0.312)	(0.305, 0.322)	(0.313,0.334)	(0.322, 0.347)
@20	mA	(0.293, 0.279)	(0.299,0.288)	(0.305, 0.297)	(0.310,0.305)	(0.317,0.316)	(0.323, 0.325)
		(0.287, 0.270)	(0.293, 0.279)	(0.299,0.288)	(0.305, 0.297)	(0.310,0.305)	(0.317,0.316)
Color T	Temperature	9100~10000	8500~9100	7600~8500	7000~7600	6500~7000	6000~6500
CCT@20mA	(° K)	3100~10000	0300~9100	7000~0300	7000~7000	0300~7000	0000-0300
Chromaticity	Chromaticity Coordinate#		ВН	BJ	BK	BL	-
		(0.322,0.347)	(0.330,0.359)	(0.338,0.371)	(0.349,0.388)	(0.358,0.402)	
CIE	X/Y)	(0.330,0.359)	(0.338,0.371)	(0.349,0.388)	(0.358, 0.402)	(0.367,0.415)	
@20	mA	(0.330,0.335)	(0.337,0.346)	(0.346,0.359)	(0.356,0.374)	(0.363,0.385)	-
		(0.323, 0.325)	(0.330,0.335)	(0.337,0.346)	(0.346,0.359)	(0.356,0.374)	
Color Ten	perature	E6E0 6000	5000 5050	5000 5000	4700 5000	4500 4700	
CCT@20mA	(°K)	5650~6000	5300~5650	5000~5300	4700~5000	4500~4700	-

^{#:}Please refer to CIE 1931 chromaticity diagram.

The quantity ratio of the ranks is decided by SOLIDLITE.

Note:

- 1. The products are sensitive to static electricity and care must be fully taken when handling products.
- 2.Measurement Uncertainty of the Luminous Intensity: ±10%
- 3. Measurement Uncertainty of the Chromaticity Coordinate: ±0.01
- 4. Measurement Uncertainty of the Voltage: ±0.05V



Drawing No.	*Rev	Date	Page
AL1411A-WWL-20mA	Е	2020/10/28	9/12

Cautions:

1. Storage

*Storage Conditions

Before opening the package:

The LEDs should be kept at 30°C or less and 90%RH or less. The LEDs should be used within a year. When storing the LEDs, moisture proof packaging with absorbent material (silica gel) is recommended.

After opening the package:

The LEDs should be kept at 30°C or less and 70%RH or less. The LEDs should be soldered within 72 hours (3days) after opening the package. If unused LEDs remain, they should be stored in moisture proof packages, such as sealed containers with packages of moisture absorbent material (silica gel). It's also recommended to return the LEDs to the original moisture proof bag and to reseal the moisture proof bag again.

*If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following condition.

Baking treatment: more than 24 hours at $65+/-5^{\circ}$ C

- *Solidlite LED electrode sections are comprised of a silver plated copper alloy. The silver surface may be affected by environments which contain corrosive gases and so on. Please avoid conditions which may cause the LED to corrode, tarnish or discolor. This corrosion or discoloration may cause difficulty during soldering operations. It is recommended that the user use the LEDs as soon as possible.
- *Please avoid rapid transitions in ambient temperature, especially in high humidity environments where condensation can occur.

2. Moisture Proof Package

- *When moisture is absorbed into the SMT package it may vaporize and expand during soldering. There is a possibility that this can cause exfoliation of the contacts and damage to the optical characteristics of the LEDs. For this reason, the moisture proof package is used to keep moisture to a minimum in the package.
- *The moisture proof package is made of an aluminum moisture proof bag whit a zipper. A package of a moisture absorbent material (silica gel) is inserted into the aluminum moisture proof bag. The silica gel changes its color from blue to pink as it absorbs moisture.

3. Heat Generation

*Thermal design of the end product is of paramount importance. Please consider the heat generation of the LED when making the system design. The coefficient of temperature increase per input electric power is affected by the thermal resistance of the circuit board and density of LED placement on the board, as well as other components. It is necessary to avoid intense heat generation and operate within the maximum ratings given in this specification.



Drawing No.	*Rev	Date	Page
AL1411A-WWL-20mA	Е	2020/10/28	10/12

^{*}The operating current should be decided after considering the ambient maximum temperature of LEDs.

4. Static Electricity

- *Static electricity or surge voltage damages the LEDs.
 - It is recommended that a wrist band or an anti-electrostatic glove be used when handling the LEDs.
- *All devices, equipment and machinery must be properly grounded.
 - It is recommended that measures be taken against surge voltage to the equipment that mounts the LEDs.
- *When inspecting the final products in which LEDs were assembled, it is recommended to check whether the assembled LEDs are damaged by static electricity or not. It is to find static-damaged LEDs by a light-on or a VF test at a lower current (below 1mA is recommended).
- *Damaged LEDs will show some unusual characteristics such as the leak current remarkably increases, the forward voltage becomes lower, or the LEDs do not light at the low current.

Criteria:(VF>2.0 V at IF=0.5mA)

5. Cleaning

- *It is recommended that isopropyl alcohol be used as a solvent for cleaning the LEDs. When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not. Freon solvents should not be used to clean the LEDs because of worldwide regulations.
- *Do not clean the LEDs by the ultrasonic. When it is absolutely necessary, the influence of ultrasonic cleaning on the LEDs depends on factors such as ultrasonic power and the assembled condition. Before cleaning, a pre-test should be done to confirm whether any damage to the LEDs will occur.

6. Other

- *Care must be taken to ensure that the reverse voltage will not exceed the absolute maximum rating when using the LEDs with matrix drive.
- *The LED light output is strong enough to injure human eyes. Precaution must be taken to prevent looking directly at the LEDs with unaided eyes for more than a few seconds
- *Flashing lights have been known to cause discomfort in people. You can prevent this by taking precautions during use. Also, people should be cautious when using equipment that has had LEDs incorporated into it.
- *The LEDs described in this brochure are intended to be used for ordinary electronic equipment (such as office equipment, communications equipment, measurement instruments and household appliances). Consult Solidlite's sales staff in advance for information on the applications in which exceptional quality and reliability are required, particularly when the failure or malfunction of the LEDs may directly jeopardize life or health (such as for airplanes, aerospace, submersible repeaters, nuclear reactor control systems, automobiles, traffic control equipment, life support systems and safety devices).



Drawing No.	*Rev	Date	Page
AL1411A-WWL-20mA	E	2020/10/28	11/12

^{*}User shall not reverse engineer by disassembling or analysis of the LEDs without having prior written consent from Solidlite. When defective LEDs are found, the user shall inform Solidlite directly before disassembling or analysis.


^{*}The formal specifications must be exchanged and signed by both parties before large volume purchased begins.

^{*}The appearance and specifications of the product may be modified for improvement without notice.



Drawing No.	*Rev	Date	Page
AL1411A-WWL-20mA	E	2020/10/28	12/12

Chromaticity Coordinate

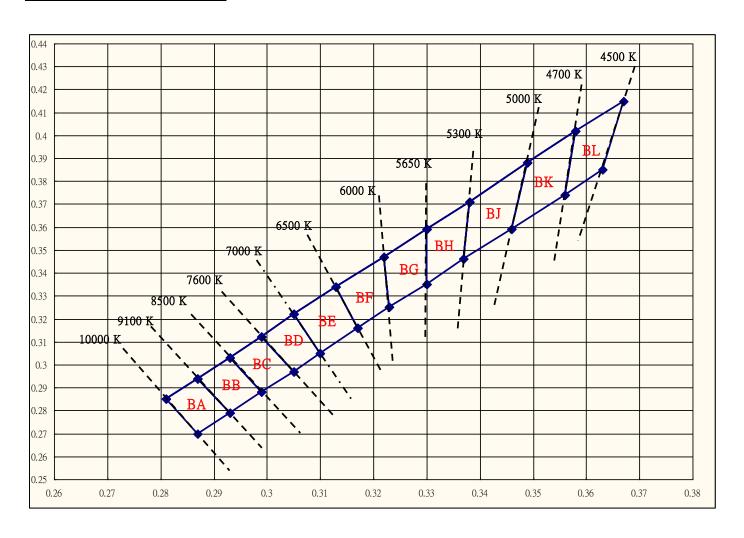

CIE X-Y: BA --- (0.281,0.285) (0.287,0.294) (0.293,0.279) (0.287,0.270) BB --- (0.287,0.294) (0.293,0.303) (0.299,0.288) (0.293,0.279) BC --- (0.293,0.303) (0.299,0.312) (0.305,0.297) (0.299,0.288) BD --- (0.299,0.312) (0.305,0.322) (0.310,0.305) (0.305,0.297) BE --- (0.305,0.322) (0.313,0.334) (0.317,0.316) (0.310,0.305) BF --- (0.313,0.334) (0.322,0.347) (0.323,0.325) (0.317,0.316) BG --- (0.322,0.347) (0.330,0.359) (0.330,0.335) (0.323,0.325) BH --- (0.330,0.359) (0.338,0.371) (0.337,0.346) (0.330,0.335) BJ --- (0.338,0.371) (0.349,0.388) (0.346,0.359) (0.337,0.346) BK --- (0.358,0.402) (0.367,0.415) (0.363,0.385) (0.356,0.374)