

Part Marking (XX:Wafer number)

Device performance _ measured on a BeRex evaluation board at 25°C, Vd=3V, 50 Ω system.

Min

50

22.1

22.5

12.4

Min

50

28

2.85

-40

Conditions

0 dBm / tone,

∆f=1 MHz

Recommended Operating Conditions

Electrical specifications are measured at specified test conditions.

Specifications are not guaranteed over all recommended operating conditions.

Electrical Specifications

Parameter

Operational

Gain

Frequency Range

Input Return Loss

Output IP3

Output P1dB

Noise Figure

Parameter

Bandwidth

 R_{TH}

Parameter

Supply Voltage

Supply Current

Input RF Power

Storage Temperature

Junction Temperature

 $I_{c} @ (Vc = 3.0V)$

Operating Case Temperature

Absolute Maximum Ratings

Output Return Loss

Test Frequency

Device Features

- Single Fixed 3V supply
- No Dropping Resistor Required
- No matching circuit needed
- Green/RoHS2 compliant SOT-363 package
- Application: Driver Amplifier, Cellular, PCS, GSM, UMTS, WCDMA, Wireless Data

OUT GND GND

Pin Description				
RF IN	3			
RF OUT	6			
GND	1,2,4,5			

Unit

MHz

MHz

dB

dB

dB

dBm

dBm

dB

Unit

MHz

mΑ V

°C/W

°C

Unit

mΑ

dBm

Max

4000

Max

4000

40

3.3

+105

Тур

900

23.6

-18.3

-12.8

25.5

13.4

2.3

Тур

34

3.0

-0.005

130

Rating

100

15

Product Description


BeRex's BGS2 is a high SiGe HBT MMIC amplifier, internally matched to 50 Ohms without the need for external components. Designed to run directly from a 3V supply. The BGS2 is designed for high linearity 3V gain block applications. It is packaged in a RoHS2 -compliant with SOT-363 surface mount package.

Applications

- Driver Amplifier
- Cellular, PCS, GSM, UMTS, WCDMA

Applications Circuit

	Application Cir	cuit Values Example		Parame
Freq.	70~900MHz	900MHz ~ 3GHz	3GHz ~ 4GHz	Bandwi
C1/C2	2nF	100pF	100pF	I _C @ (V
L1 (1608 Chip Ind.)	1uH	56nH	27nH	V _C
			Vcc	dG/dT



*C1, C2, C3 =100 pF ± 5%; C4 = 1 nF ± 5%; C5 = 10uF; **L1 = 56nH

**less than 56nH improves RF performance at over 0.9GHz.

*1uH or higher value L1 improves RF performance at under 900MHz.

*Optimum value of L1 may vary with board design.

*C1,C2=2nF, L1=1uH for 70MHz application,

BeRex

*C1,C2=100pF, L1=27nH for 3.5GHz application.

•website: www.berex.com

•email: sales@berex.com

Specifications and information are subject to change without notice. BeRex is a trademark of BeRex.

All other trademarks are the property of their respective owners. © 2021 BeRex

-55 to +155 °C °C +165 v +3.9



Freq	MHz	50	70	900	1900	2140	2450	2650	3500
S21	dB	26.8	26.5	23.6	19.8	19	18.1	17.2	15.0
S11	dB	-18.4	-19.6	-18.3	-18.6	-18.4	-18.1	-17.6	-13.7
S22	dB	-16	-15.6	-12.8	-9.9	-9.4	-10.5	-13.2	-15.7
P1	dBm	15.4	15.6	13.4	12.8	11.2	10.8	10.4	8.7
OIP3	dBm	28.5	28	25.5	24.5	23	22.5	25	19.2
NF	dB	2.7	2.7	2.3	2.2	2.2	2.3	2.5	2.7

Typical Performance (Vd = 3.0V, Ic = 34mA, T = 25°C)

Typical Performance (Vd = 3.1V, Ic = 41mA, T = 25°C)

Freq	MHz	50	70	900	1900	2140	2450	2650
S21	dB	27.1	26.8	23.7	19.9	19.1	18.2	17.4
S11	dB	-16.7	-17.2	-17.2	-17.9	-17.9	-18.3	-18.0
S22	dB	-15.5	-14.7	-12.5	-9.4	-9.5	-10.6	-13.4
P1	dBm	16.0	16.5	140	13.1	12.0	11.2	10.8
OIP3	dBm	29.5	29.0	26.5	25.4	23.5	23.0	25.0
NF	dB	2.7	2.7	2.3	2.2	2.2	2.3	2.5

Typical Performance (Vd = 3.2V, Ic = 47mA, T = 25°C)

Freq	MHz	50	70	900	1900	2140	2450	2650
S21	dB	27.4	27.1	23.9	20.0	19.2	18.3	17.5
S11	dB	-15.2	-15.5	-16.3	-17.2	-17.3	-18.0	-18.3
S22	dB	-14.8	-13.7	-12.1	-9.6	-9.6	-10.7	-13.6
P1	dBm	16.8	17.2	14.6	13.3	12.0	11.2	11.0
OIP3	dBm	30.0	30.0	27.0	26.0	24.0	23.5	25.1
NF	dB	2.7	2.7	2.3	2.2	2.2	2.3	2.5

Typical Performance (Vd = 3.3V, Ic = 53mA, T = 25°C)


Freq	MHz	50	70	900	1900	2140	2450	2650
S21	dB	27.6	27.3	23.9	20.0	19.3	18.4	17.6
S11	dB	-14.1	-14.2	-15.5	-16.7	-16.8	-17.8	-18.4
S22	dB	-14.2	-12.9	-11.8	-9.7	-9.7	-10.0	-13.9
P1	dBm	17.4	18.0	15.0	13.6	12.3	11.7	11.3
OIP3	dBm	32.0	30.0	27.0	26.2	24.5	23.1	26.0
NF	dB	2.7	2.7	2.3	2.2	2.2	2.3	2.5

BeRex

•website: <u>www.berex.com</u>


•email: sales@berex.com



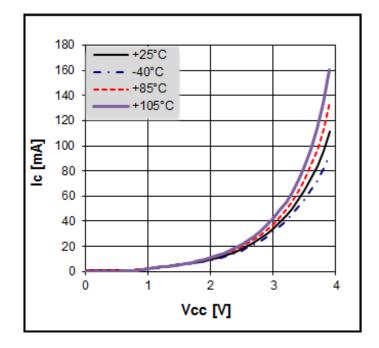

V-I Characteristics

BeRex SOT-363 Evaluation Board



*Dielectric constant _ 4.2 *31mil thick FR4 PCB

BeRex

•website: <u>www.berex.com</u>

•email: <u>sales@berex.com</u>



Tr1 S11 Log Mag 10.00dB/ Ref 0.000dB [F2] 🎽 📭 S21 Log Mag 10.00dB/ Ref 0.000dB [F2] 50.00 900.00000 MHz -19.571 dB 1.9000000 GHz -20.062 dB 2.1400000 GHz -21.055 dB 2.4500000 GHz -20.630 dB 70.00 900.00000 MHz 23.453 dB 19.444 dB 18.697 dB 1.9000000 GHz 2.1400000 GHz 40.00 2 60.00 3 3 30.00 50.00 -4 -4 2.4500000 GHz 17.766 dB 20.00 40.00 10.00 30.00 0.000) 20.00 <u>A</u> 44 -10.00 10.00 -20.00 0.000) 44 4 -30.00 -10.00 -40.00 -20.00 -50.00 -30.00 Tr3 S12 Log Mag 10.00dB/ Ref 0.000dB [F2] Tr4 522 Log Mag 10.00dB/ Ref 0.000dB [F2] 50.00 50.00 900.00000 MHz -26.668 dB 1.9000000 GHz -24.923 dB 2.1400000 GHz -24.258 dB 2.4500000 GHz -23.633 dB 40.00 Ξ 40.00 1.9000000 GHz 10.345dB 3 30.00 30.00 -4 GH **HB** 4500000 20.00 20.00 10.00 10.00 0.000) 0.000) -10.00 -10.00 Δ. -20.00 -20.00 <u> 삼</u> -30.00 -30.00 ÷ -40.00 -40.00 -50.00 -50.00

Typical Device Data

S-parameters (Vc=3V, Ic=34mA, T=25°C)

S-Parameter


(Vdevice = 3.0V, Icc = 34mA, T = 25 °C, calibrated to device leads)

Freq	S11	S11	S21	S21	S12	S12	S22	S22
[MHz]	Mag	Ang	Mag	Ang	Mag	Ang	Mag	Ang
70	-3.69	-52.41	24.13	-121.02	-30.59	82.59	-4.42	-170.10
900	-17.69	34.25	23.38	76.30	-26.60	-28.23	-12.45	142.20
1000	-17.25	22.43	22.95	65.43	-26.52	-34.19	-12.00	136.29
1500	-17.21	-18.66	20.82	16.20	-25.69	-57.19	-10.22	103.27
2000	-19.07	-63.14	19.00	-28.30	-24.73	-82.74	-10.16	73.85
2500	-20.38	-132.94	17.52	-71.11	-23.50	-111.35	-11.80	48.64
3500	-10.04	90.91	15.48	-158.27	-21.28	-175.51	-26.52	64.38
4000	-6.03	26.54	13.56	143.48	-20.97	137.09	-9.21	111.96

•email: sales@berex.com




Typical Performance (Vd = 3.0V, Ic = 34mA, T = 25°C)

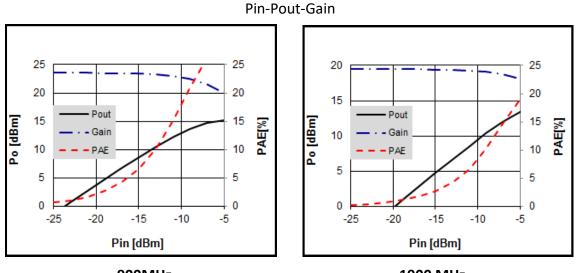

900MHz



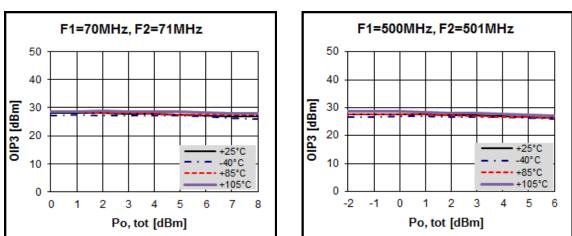


OIP3

•website: <u>www.berex.com</u>

•email: sales@berex.com



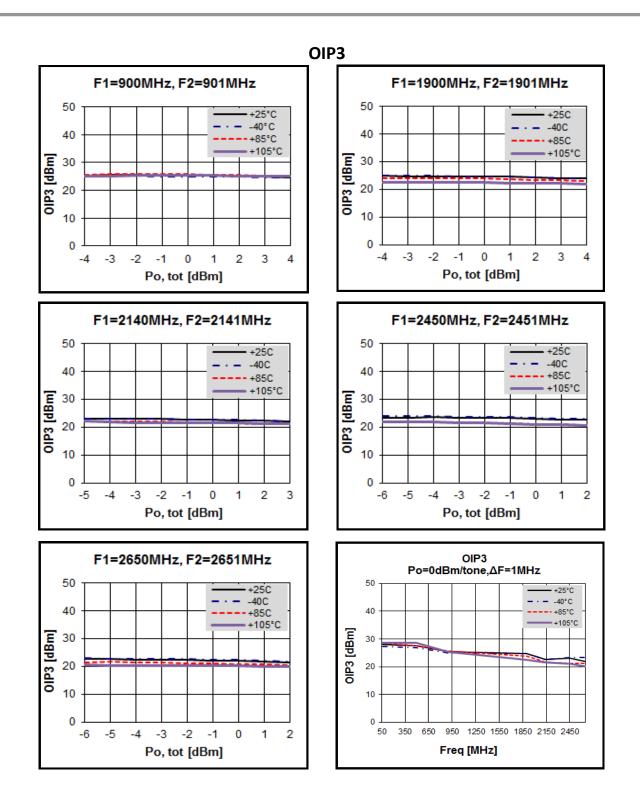

BeRex


•website: <u>www.berex.com</u>

•email: sales@berex.com

Specifications and information are subject to change without notice. BeRex is a trademark of BeRex. All other trademarks are the property of their respective owners. © 2021 BeRex






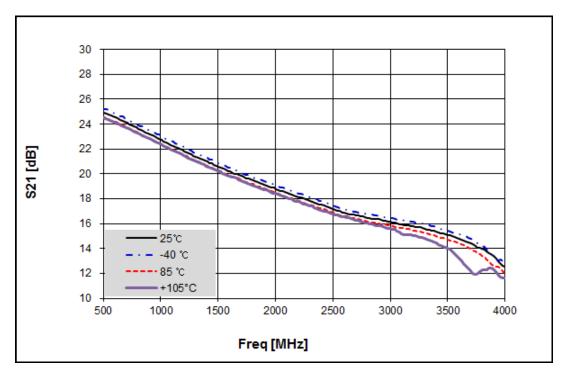



BeRex



SOT-363 Package Outline Dimension (Unit. mm)








SYMBOL	MIN	MAX
E	1.15	1,35
D	1,85	2,25
HE	2,00	2,30
A	0,80	<u>1</u> ,00
A2	0.80	0.91
A1	0.00	0.09
e	0,65	BSC
ø	0.15	0.30
C	0.08	0.25
Г	0.21	0.41

Suggested PCB Land Pattern and PAD Layout

PCB Land Pattern


PCB Mounting

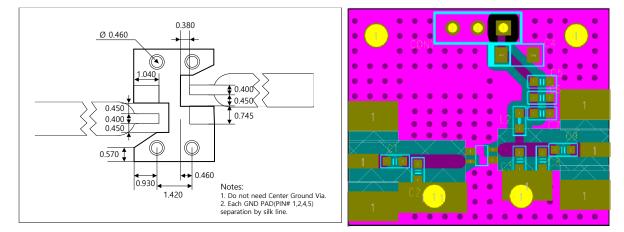


•website: <u>www.berex.com</u>



Package Marking




New Package Marking



* Note : New Package marking has been modified from BS2X to B2XX since Aug. 2017.

Tape & Reel

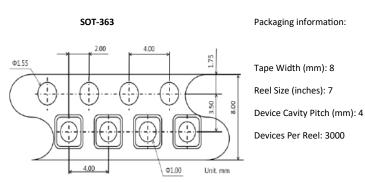

Lead plating finish

100% Tin Matte finish

(All BeRex products undergoes a 1 hour, 150 degree C, Anneal bake to eliminate thin whisker growth concerns.)



MSL / ESD Rating

ESD Rating:	Class 1C
Value:	Passes <2000V
Test:	Human Body Model (HBM)
Standard:	JEDEC Standard JESD22-A114
MSL Rating:	Level 1 at +260°C convection reflow
Standard:	JEDEC Standard J-STD-020



Proper ESD procedures should be followed when handling this device.

RoHS Compliance

This part is compliant with Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment (RoHS) Directive 2011/65/EU as amended by Directive 2015/863/EU. This product also is compliant with a concentration of the Substances of Very High Concern (SVHC) candidate list which are contained in a quantity of less than 0.1%(w/w) in each components of a product and/or its packaging placed on the European Community market by the BeRex and Suppliers.

NATO CAGE code:

2 N 9	6	F
-------	---	---