CUSTOMER PRODUCT SPECIFICATION SHEET

RoHS Complian

CABLE 379 RF: I-PEX MHF TO RP SMA S/T BULKHEAD JACK WITH O-RING RATED TO IP67/68 TO MULTIPLE CABLE SIZES, 6GHz

SPECIFICATIONS:


- 1. I-PEX MHF PLUG. P/N: 20278-112R-13.
- 2. COAXIAL CABLE, SEE P/N OPTIONS
- 3 SMA STRAIGHT BUI KHEAD JACK WITH O-RING RATED TO IP67/68, P/N: RFCT-SMA071-F78.

ENVIRONMENTAL:

- A. BULKHEAD MOUNTED CONNECTOR (RFCT-SMA071-F78) RATED TO HE FOLLOWING SPECIFICATION:
- i. IP6X DUST TIGHT NO PARTICLE INGRESS.
- ii IPX7 WATERPROOF FOR 30 MINUTES UP TO 1 METER UNDERWATER
- iii. IPX8 WATERPROOF FOR 48 HOURS AT 1 METER UNDERWATER.


NOTES:

- 1. THE ORIENTATION OF CONNECTORS ON DRAWING IS FOR REFERENCE ONLY. IF THE ORDER IS LEFT BLANK THE CONNECTOR WILL NOT HAVE FIXED ORIENTATION.
- 2. FIXED ORIENTATION IS SUGGESTED FOR CABLE LENGTH 50MM TO 100MM, PLEASE SPECIFY THE FIXED ORIENTATIONS FROM THE ORDER CODE (F1, F2, ETC)
- 3. CONTACT GRADCONN IF THE ORIENTATION YOU REQUIRE IS NOT SHOWN
- 4. WORKING FREQUENCY RANGE: DC-6GHz.
- 5 OPERATING TEMPERATURE: -40°C~+85°C
- 6. IMPEDANCE: 50 Ohm.




USAGE PRECAUTIONS: CABLES USING 'MICRO' COAX ARE DELICATE:

- (i) HANDLE WITH CARE
- (ii) DO NOT TWIST: APPLY EXCESSIVE FORCES OR SHARP BENDS TO THE CABLE. DO NOT FORCEFULLY DEFORM WIRES.
- (iii) CONSULT CONNECTOR MANUFACTURER'S DATASHEFTS FOR DETAILED NOTES. ON HANDLING INSTRUCTIONS.



RECOMMENDED SMA MOUNTING HOLE

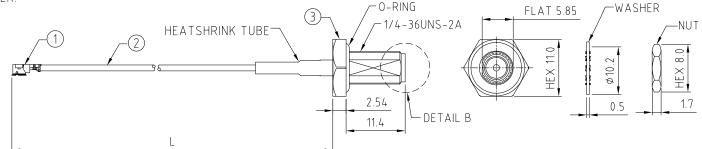

HOW TO ORDER

CABLE 379 RF - X X X - X X - X - X

"L" LENGTH IN MM: eg: 100MM = 100 (MIN. 050-MAX.400


STANDARD = 100, 150, 200) Tolerance: 50-200mm: ±5mm

201-400mm: ±7mm

CABLE SIZE OPTIONS: $1 = \phi 1.13MM$ CABLE, COLOR: GREY $2 = \phi 1.13MM LOW LOSS CABLE, COLOR: GREY$

WASHER AND NUT OPTIONS: BLANK = SEPARATELY PACKED (STANDARD) A = ASSEMBLED WITH CONNECTOR

() THIS DRAWING IS CONFIDENTIAL AND MUST NOT BE COPIED OR DISCLOSED WITHOUT WRITTEN CONSENT



DETAIL B SCALE 3:1

ORIENTATION OPTIONS:

BLANK = DOES NOT HAVE A FIXED ORIENTATION F1 = MHF CONNECTION DOWN (L=50-200MM)

F2 = MHF CONNECTION UP (L=50-200MM)

(SEE NOTES 1, 2, 3 AND DIAGRAMS FOR MORE INFORMATION)

	Scale:	NTS	THIRD ANGLE	Unstated Tolerances: .X N/A .XX N/A	-
	Drawn:	СС	→	- XXX N/A ANGLES N/A	
	App'd:	XXX	Title CABLE ASSEMBLY		
	Date: 14	JUL. '20	Revision: 1.3	Unit: mm	_



IP67/68 Rated Cables



Type: Cable 379 RF CABLE 379 RE Drawing Number:

Sheet 1 of 1 Drawing (C) E and 0 E

