

# 19.44 to 40 MHz, 3.3V, VCXO for General Purpose Applications

#### **Features**


- 3.3V operating voltage
- · Uses an external crystal
- On-chip VCXO with pull range of 240ppm
- VCXO tuning voltage from 0V to 3.3V
- 10mA output drive at CMOS levels
- Packaging (Pb-free & Green):
  - 8-pin SOIC (W)

## **Description**


The PI6CX100-00 is a low-cost, high-performance, 3.3V, VCXO available in discrete IC form with external quartz cryatal. The on-chip Voltage Controlled Crystal Oscillator accepts a 0V to 3.3V input voltage that pulls the output clock frequency by  $\pm 120$ ppm. This device operates with an external quartz crystal specified to achieve the desired performance.

The PI6CX100-00 is designed for General Purpose applications, supporting operating frequencies between 19.44 and 40 MHz.

## **Block Diagram**

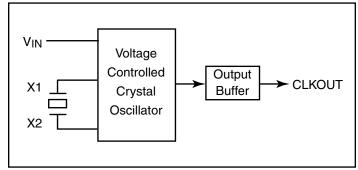

## **Pin Configuration**

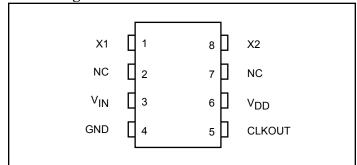

#### **Pin Description**

Pin Name	Number	Туре	Description
X1, X2	1, 8	Ι	Crystal Connection
NC	2, 7		No Connection
V <sub>IN</sub>	3	I	Voltage Input to VCXO
GND	4	PWR	Ground
CLKOUT	5	0	Clock Output
V <sub>DD</sub>	6	PWR	Power Supply <sup>(1)</sup>

1

#### Note:

1. 0.1μF or 0.01μF bypass capacitor is required.



## **Maximum Ratings**

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature	55°C to 125°C
Ambient Temperature	40°C to 85°C
Supply Voltage V <sub>DD</sub>	0.5V to 7V
Inputs/Outputs Voltage	0.5V to V <sub>DD</sub> +0.5V
Output Current	10mA
Soldering Lead Temperature (10s)	260°C
Junction Temperature	50°C to 150°C

#### Note:

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

#### **DC Electrical Characteristics**

(Unless otherwise specified,  $V_{DD} = 3.3V$ ,  $f_O = 27$  MHz,  $V_{IN} = 1.65V$ , Load = 15pF,  $T_A = 25$ °C)

Symbol	Desciption	Test Condidtion	Min.	Тур.	Max.	Units
$V_{\mathrm{DD}}$	Operating Voltage		3.135	3.3	3.465	
V <sub>OH</sub>	Output High Volage	$I_{OH} = -12mA$	2.8			V
$V_{ m OL}$	Output Low Voltage	$I_{OL} = 12mA$			0.5	
I <sub>OH</sub>	Output High Current	$V_{OH} = V_{DD} - 0.5V$		-11	-4	
$I_{ m OL}$	Output Low Current	$V_{OL} = 0.5V$	4	12		mA
$I_{\mathrm{DD}}$	Supply Current	$C_L = 15pF$		5		
$I_{OZ}$	Output Off-leakage				10	μА
$R_{\mathrm{S}}$	Negative Resistance	$V_{IN} = 0V$		-150		Ω
$f_{\mathrm{O}}$	Input Frequency		19.44		40	MHz
$C_{\mathrm{L}}$	Output load Capacitance			15	30	pF


## AC Electrical Characteristics (Unless otherwise specified, $f_O = 27$ MHz, Load = 15pF, $T_A = 25$ °C)

Symbol	Desciption	Test Condidtion	Min.	Тур.	Max.	Units
$T_R/T_f$	Rise / Fall Time	0.1V <sub>DD</sub> to 0.9 V <sub>DD</sub>		1.5	6	ns
$T_d$	Duty Cycle	0.5 V <sub>DD</sub>	45		55	%
$\Delta f$	Pull Range	$V_{IN} = 0$ to $V_{DD}$		±120		ppm
Tj	Cycle-to-Cycle Jitter	$C_L = 15pf$		50		ps
Lin	Linearity	$V_{IN} = 0.1 V_{DD}$ to 0.9 $V_{DD}$		±10		%
	Oscillator Start Time	$V_{DD} = 0.9 V_{DD}$ Trigger		1.5	10	ms

2




# **Pullability Characteristics**

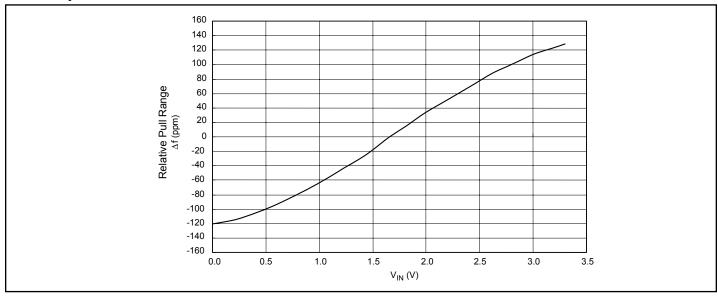

# **Recommended Crystal Specifications**

Description	Crystal
Mode of Oscillation and Cut	Fundamental AT
Frequency (as specified)	19.44 to 40 MHz
Frequency Tolerance	±20ppm
Temperature plus Aging Stability	±30ppm
Operating Temperature	-20°C to +70°C
C0 /C1	240 (max.)
Load Capacitance (C <sub>L</sub> )	18pF
Equivalent Series Resistance (ESR)	35Ω (max.)

## **Measurement Circuit**

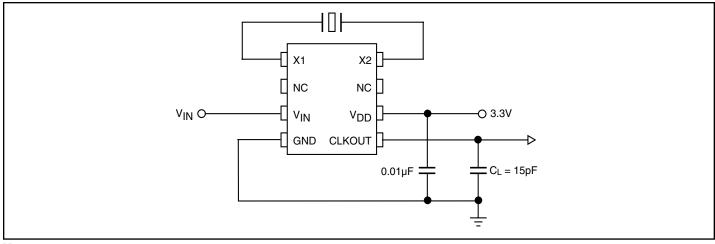


3

#### Note:

1.  $0.1\mu F$  or  $0.01\mu F$  bypass capacitor is required.



## Packaging Mechanical: Plastic 8-pin SOIC (W)

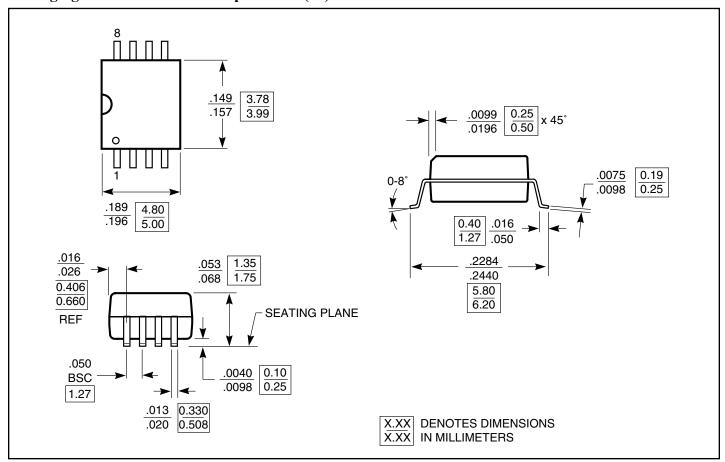

## **Ordering Information**

Ordering Code	Package Code	Package Type	<b>Operating Range</b>	
PI6CX100-00WE	W	Pb-free & Green 8-pin, 150-mil SOIC	Industrial	

#### **Notes:**

- 1. Thermal characteristics can be found on the company web site at www.pericom.com/packaging/
- 2. Use Suffix "X" for tape and reel
- 3. Number of Transistors = TBD