

AMP SMA


TE Internal #: 2-332004-0

RF Connector Hardware, Jam Nut, AMP SMA

View on TE.com >



Connectors > RF Connectors > RF Connector Accessories > RF Connector Hardware

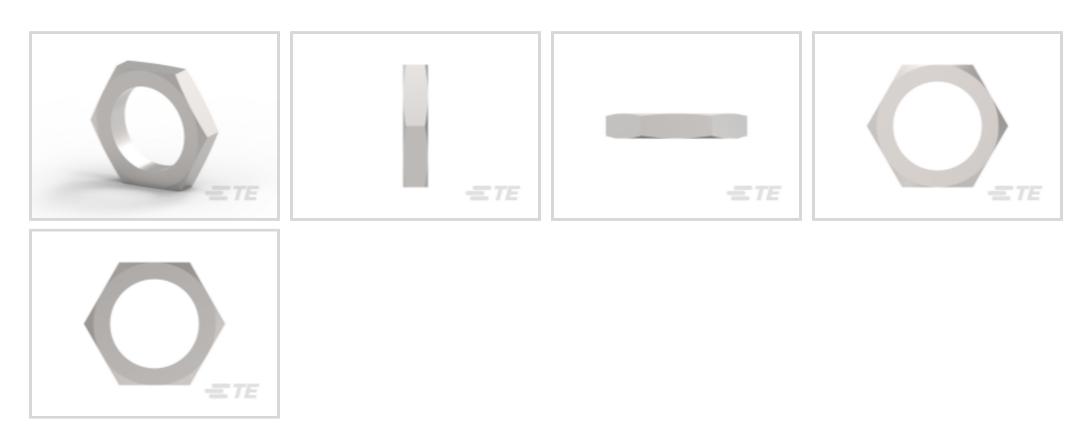

RF Connector Hardware Type: Jam Nut

Features

Product Type Features

RF Connector Hardware Type	Jam Nut
Packaging Features	
Packaging Method	Package

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as



EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Also in the Series | AMP SMA

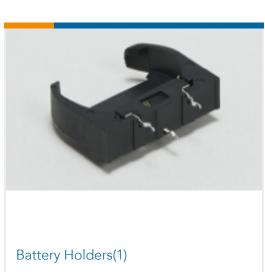



Coax Connectors (295)














Rack & Panel Ferrules & Inserts(1)

RF Cable Assemblies(2)

RF Connector Hardware(2)

RF Connector Launchers(8)

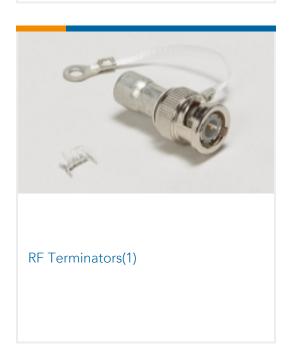

Customers Also Bought











TE Part #6334-232-2558
SHL RECP ASSY

TE Part #2-1393216-6 V23057-B3006-A101

TE Part #Y66601-Z11-35PN000 RECP ASSY

TE Part #Y66601-Z13-04SN000 RECP ASSY

TE Part #Y66601-Z15-35SN000 RECP ASSY

TE Part #Y66601-Z21-48PN000 RECP ASSY

Documents

Product Drawings

SMA JAM NUT, PASSIVATED

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-332004-0_AD.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-332004-0_AD.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-332004-0_AD.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications



Product Specification

English

AMP COMMON TERMINATION (CT), CONNECTOR, 2mm PITCH, M/T TYPE, LEAD FREE VERSION

Japanese

Product Specification

Japanese

Product Environmental Compliance

Product Compliance

English

Product Compliance

English