

TE Internal #: 5227839-1 TNC RF Interface, Jack, 50 Ω, Screw, 11 GHz Operating Frequency, Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount View on TE.com >



Connectors > RF Connectors > Coax Connectors



RF Interface: **TNC** RF Connector Style: **Jack** RF Connector Mated Outer Diameter (Approximate): **16.26 mm [.64 in]** Impedance: **50** Ω

RF Connector Coupling Mechanism: Screw

Features

Product Type Features

RF Interface	TNC
RF Connector Style	Jack
Connector System	Cable-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
PCB Mount Orientation	Vertical
Number of Positions	1
Number of Coaxial Contacts	1
Electrical Characteristics	
Impedance	50 Ω
Body Features	
Body Material	Zinc
Body Plating Material	Nickel
Contact Features	
RF Connector Center Contact Underplating Material	Nickel
RF Connector Center Contact Plating Material	Gold
RF Connector Center Contact Material	Phosphor Bronze
Termination Features	

C For support call+1 800 522 6752

TNC RF Interface, Jack, 50 Ω , Screw, 11 GHz Operating Frequency, Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount



Termination Post & Tail Length	4.1 mm[.162 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
PCB Mount Retention	With
RF Connector Coupling Mechanism	Screw
Connector Mounting Type	Panel Mount
RF Contact Captivation Method	Mechanical
Detent	Without
Dimensions	
Panel Thickness (Recommended)	6.1 mm[.24 in]
Profile Height from PCB	15.88 mm[.625 in]
RF Connector Mated Outer Diameter (Approximate)	16.26 mm[.64 in]
Usage Conditions	
Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
Operation/Application	
Operating Frequency	11 GHz
Packaging Features	

Packaging Method

Tray

Other

Additional Features

Dielectric Material

Mounting Posts

Polymethylpentene

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU

EU ELV Directive 2000/53/EC

China RoHS 2 Directive MIIT Order No 32, 2016

EU REACH Regulation (EC) No. 1907/2006

Compliant with Exemptions

Compliant with Exemptions

Restricted Materials Above Threshold

Current ECHA Candidate List: JUNE 2023

(235)

Candidate List Declared Against: JUNE 2023 (235)

SVHC > Threshold:

Pb (3.7% in Component Part)

Article Safe Usage Statements:

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

TNC RF Interface, Jack, 50 Ω , Screw, 11 GHz Operating Frequency, Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount



Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free


Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

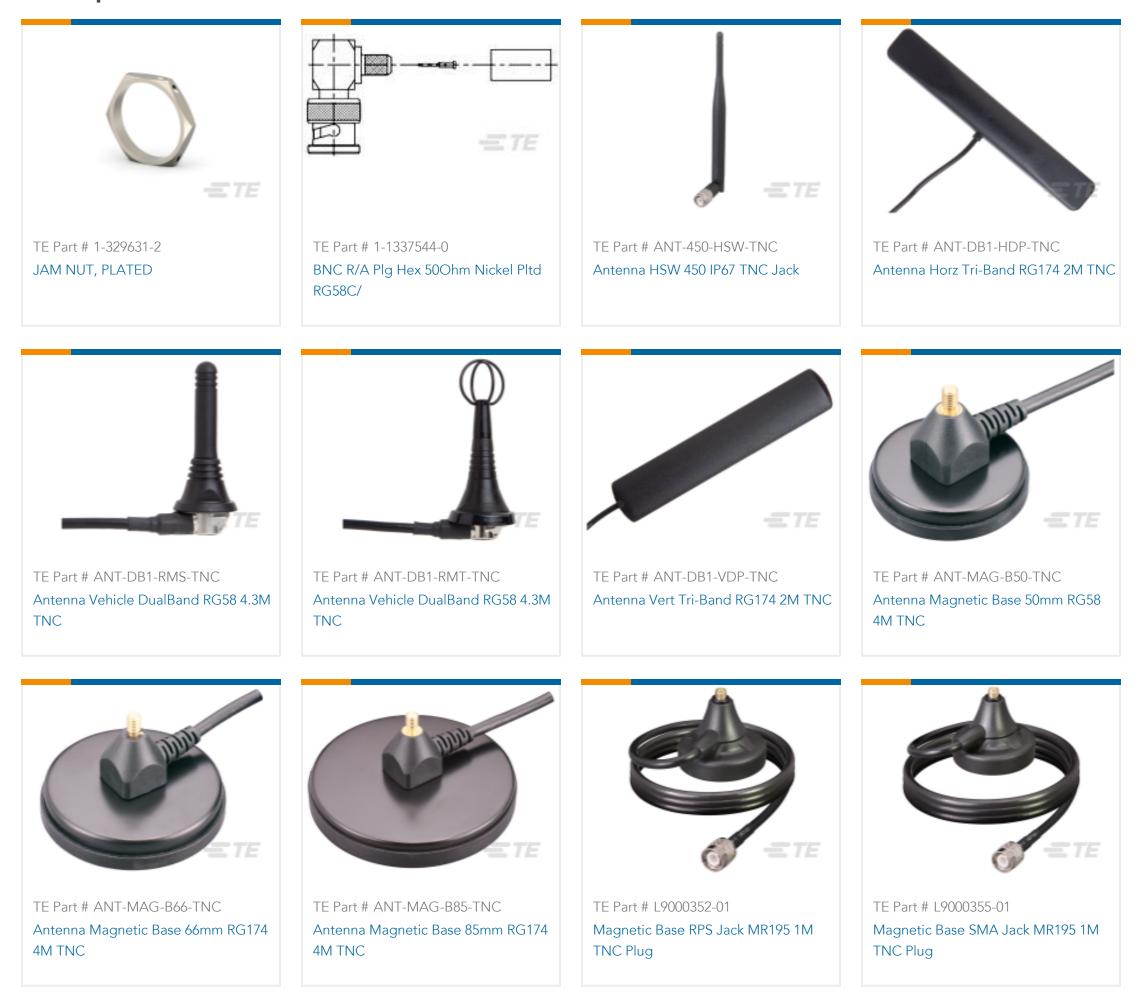

Customers Also Bought

TNC RF Interface, Jack, 50 Ω , Screw, 11 GHz Operating Frequency, Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount



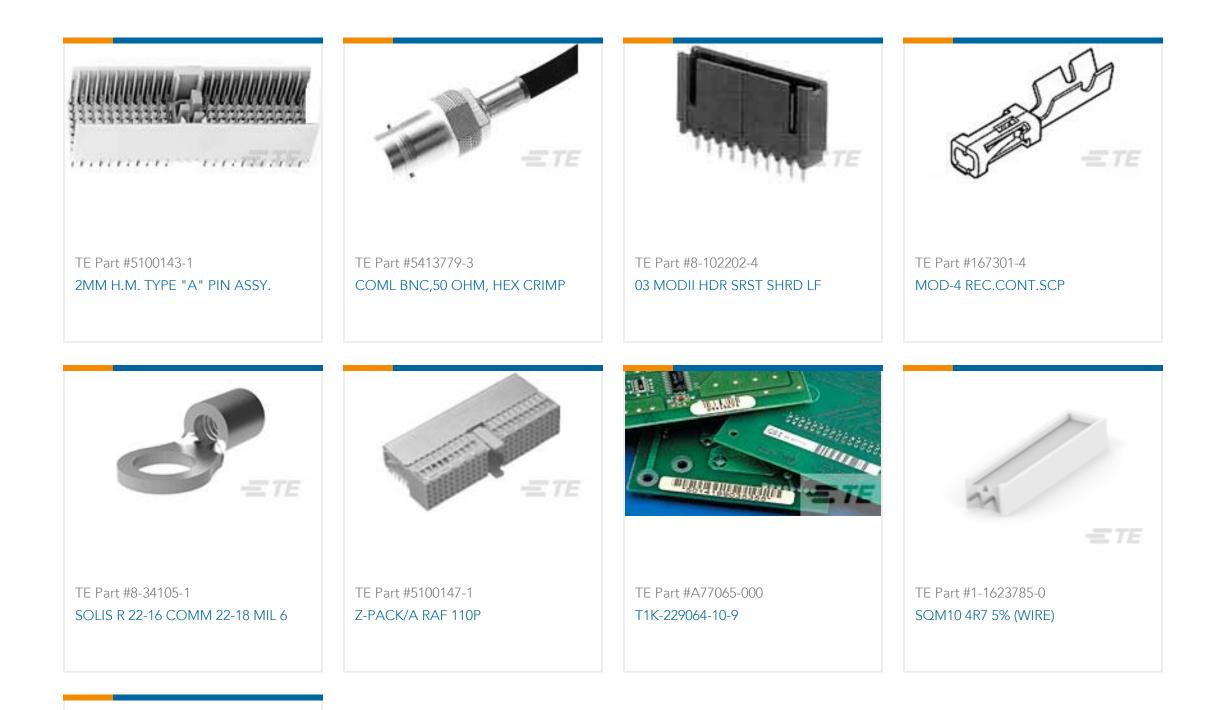

TE Part #AAG4435-00 TXR40AB00-2412AI-CS9111

Documents

Product Drawings TNC PCB RT ANGLE JACK

English

CAD Files Customer View Model ENG_CVM_5227839-1_A.3d_igs.zip English Customer View Model ENG_CVM_5227839-1_A.3d_stp.zip English Customer View Model ENG_CVM_5227839-1_A.2d_dxf.zip English 3D PDF

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

C For support call+1 800 522 6752

TNC RF Interface, Jack, 50 Ω , Screw, 11 GHz Operating Frequency, Cable-to-Board, 1 Position, Printed Circuit Board, Panel Mount



TNC Connectors

English

Product Environmental Compliance MD_5227839-1_07212016452_dmtec

English

MD_5227839-1_07212016452_dmtec

English