

ANT-418-PW-RA ✓ ACTIVE

TE Internal #: ANT-418-PW-RA

Whip Antenna, Single Band, Cellular / Cat-M/NB-IoT, External Mount, Stud/Screw/Lug Mount, Screw-Mount, Omnidirectional, Single Port, Gain 0 < 3 dBi

[View on TE.com >](#)



Antennas



Wireless Application: **Cat-M/NB-IoT, Cellular**

Mounting Location: **External**

Mounting Type: **Stud/Screw/Lug Mount**

Antenna Termination: **Screw-Mount**

Antenna Type: **Whip**

Features

Product Type Features

Antenna Termination	Screw-Mount
---------------------	-------------

Configuration Features

Antenna Style	Whip
Mounting Location	External
Antenna Type	Whip
Band Type	Single Band
Port Configuration	Single Port

Electrical Characteristics

VSWR (Max)	<2.1:1
Impedance	50 Ω

Signal Characteristics

Gain (Max)	2 dB
Frequency Band	418 MHz
Nominal Frequency Range	410 – 470
Peak Gain	0 < 3 dBi

Body Features

Product Weight	16.81 g[.59294 oz]
----------------	--------------------



Mechanical Attachment

Polarization	Linear
Mounting Type	Stud/Screw/Lug Mount

Dimensions

Product Width	7 mm[.28 in]
Product Length	131.5 mm[5.18 in]
Product Height	0 mm[0 in]

Operation/Application

Antenna Environment	Outdoor
Directionality	Omnidirectional

Industry Standards

Wireless Application	Cat-M/NB-IoT, Cellular
Primary Application	Cat-M/NB-IoT, Cellular

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the

product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



TE Part # ANT-418-HESM
Antenna 1/4 Wave Coil 418MHz SMT



TE Part # ANT-418-HETH
Antenna 1/4 Wave Coil 418MHz THM



TE Part # ANT-418-SP
Antenna SP PCB RPC 418MHz SMT

Customers Also Bought



TE Part #9-146280-0
40 MODII HDR SRST B/A .100CL




TE Part #8-1437627-5
G12KB=BUTTON GUARD KNURL BLACK



TE Part #ANT-418-CW-HD
Antenna 1/4 Wave HD Whip 418MHz RPS



TE Part #ANT-418-CW-QW
Antenna 1/4 Wave Whip 418MHz RPS

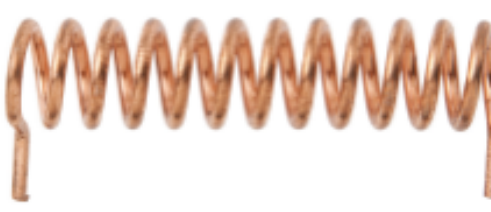

TE Part #ANT-418-HETH
Antenna 1/4 Wave Coil 418MHz THM



TE Part #L9000252-01
RP-SMA Jack 50 Ohm .062 PCB Edge Mount



TE Part #RXM-418-LR
Module LR 418MHz AM OOK RX RCVR



TE Part #TRM-315-LT
Module LT 315MHz AM OOK XCVR



TE Part #TRM-418-LT
Module LT 418MHz AM OOK XCVR



TE Part #TXM-315-LC
Module LC 315MHz AM OOK TX XMTR

Documents

Product Drawings

[Antenna 1/4 Wave 418MHz Swivel Screw #6](#)

English



[Datasheets & Catalog Pages](#)

[ANT-418-PW-RA](#)

English