

ANT-916-JJB-ST ✓ ACTIVE

TE Internal #: ANT-916-JJB-ST

Dome/Puck Antenna, Single Band, LPWAN / LoRaWAN, Internal /Embedded Mount, Through-Hole/Tab Mount, Solder, Omnidirectional, Single Port, Gain < 0 dBi

[View on TE.com >](#)



Antennas



Wireless Application: **LoRaWAN, LPWAN, Wi-Fi**

Mounting Location: **Internal/Embedded**

Mounting Type: **Through-Hole/Tab Mount**

Antenna Termination: **Solder**

Antenna Type: **Dome/Puck**

Features

Product Type Features

Antenna Termination	Solder
---------------------	--------

Configuration Features

Antenna Style	Dome
Mounting Location	Internal/Embedded
Antenna Type	Dome/Puck
Band Type	Single Band
Port Configuration	Single Port

Electrical Characteristics

VSWR (Max)	<2.1:1
Impedance	50 Ω

Signal Characteristics

Frequency Band	915 MHz
Nominal Frequency Range	902 – 930
Peak Gain	< 0 dBi

Body Features

Product Weight	.46 g[.01622 oz]
----------------	------------------

Mechanical Attachment

--	--



Polarization	Linear
Mounting Type	Through-Hole/Tab Mount

Dimensions

Product Width	7 mm[.28 in]
Product Length	17.6 mm[.69 in]
Product Height	0 mm[0 in]

Operation/Application

Directionality	Omnidirectional
----------------	-----------------

Industry Standards

Wireless Application	LoRaWAN, LPWAN, Wi-Fi
Primary Application	LoRaWAN, LPWAN

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Not Yet Reviewed
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



TE Part # ANT-915-CPA
Antenna CER Patch 40mm Sq 915MHz Adh THM




TE Part # ANT-916-HESM
Antenna 1/4 Wave Coil 916MHz SMT




TE Part # ANT-916-HETH
Antenna 1/4 Wave Coil 868MHz THM



TE Part # ANT-916-PW-LP
Antenna 1/4 Wave 916MHz Screw #10

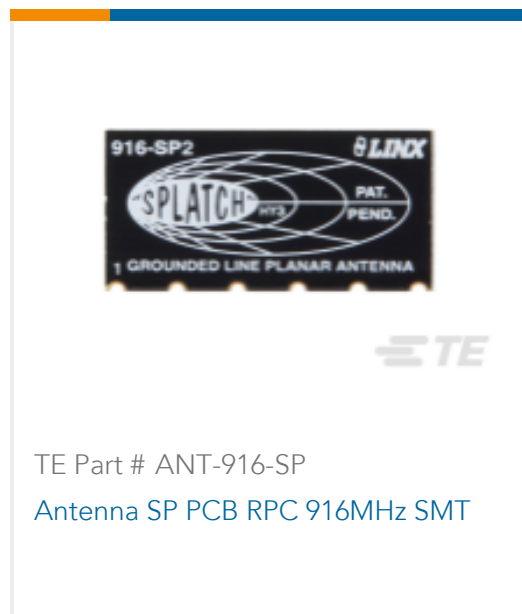


TE Part # ANT-916-SP
Antenna SP PCB RPC 916MHz SMT

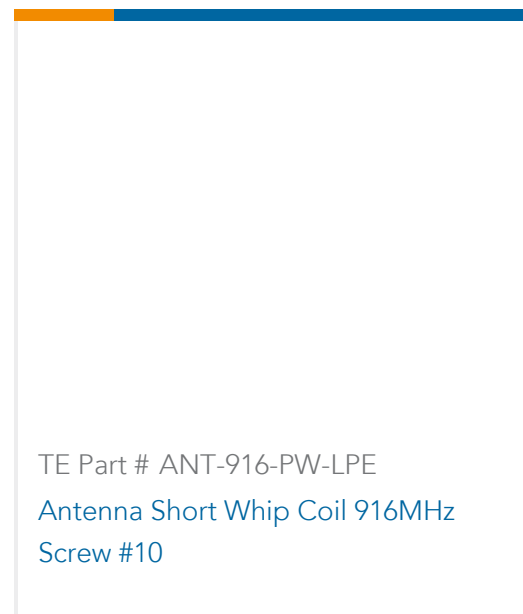

TE Part # ANT-916-PW-LPE
Antenna Short Whip Coil 916MHz Screw #10

Customers Also Bought

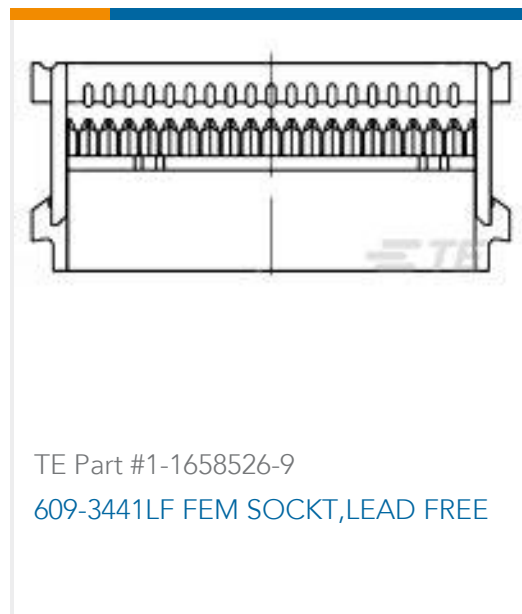

TE Part #1-1658526-9
609-3441LF FEM SOCKET, LEAD FREE



TE Part #42802-1
250 FASTON TAB TPBR



TE Part #5555165-2
M/J, LPF, R/A, 6P/4C, TIN, BULK PKG



TE Part #1658525-2
622-3453LF, PCB IDC, LEAD FREE




TE Part #2118713-2
STD SHIELD COVER, CRS-14.06X13.10X2.00MM



TE Part #ANT-868-JJB-RA
Antenna Mini R-Angle 868MHz THM



TE Part #ANT-868-JJB-ST
Antenna Mini Straight 868MHz THM

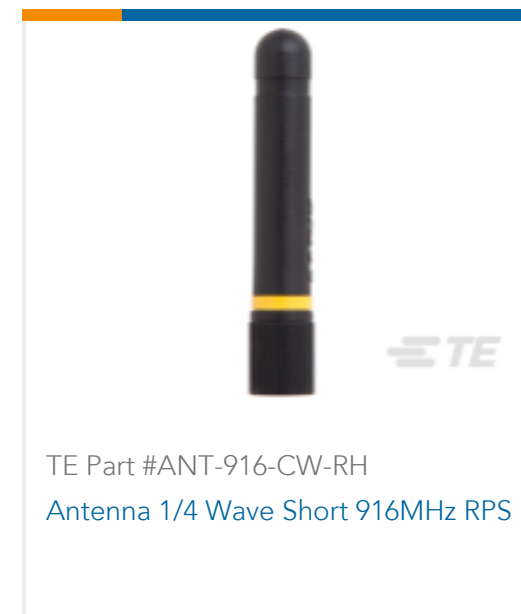

TE Part #ANT-916-CW-RH
Antenna 1/4 Wave Short 916MHz RPS



TE Part #ANT-916-JJB-RA
Antenna Mini R-Angle 916MHz THM



TE Part #3-2176308-3
RP 1E 0.1W 4R99 0.1% 25PPM 1K RL



Documents

Product Drawings

[Antenna Mini Straight 916MHz THM](#)

English

Datasheets & Catalog Pages

[ANT-916-JJB-cc](#)

English