

ANT-916-PW-LP ✓ ACTIVE

TE Internal #: ANT-916-PW-LP

Whip Antenna, Single Band, LPWAN / LoRaWAN, External Mount, Stud/Screw/Lug Mount, M5, Omnidirectional, Single Port, Gain 0 < 3 dBi

[View on TE.com >](#)



Antennas



Wireless Application: **LoRaWAN, LPWAN, Wi-Fi**

Mounting Location: **External**

Mounting Type: **Stud/Screw/Lug Mount**

Antenna Termination: **M5**

Antenna Type: **Whip**

Features

Product Type Features

Antenna Termination	M5
---------------------	----

Configuration Features

Antenna Style	Whip
Mounting Location	External
Antenna Type	Whip
Band Type	Single Band
Port Configuration	Single Port

Electrical Characteristics

VSWR (Max)	<1.9:1
Impedance	50 Ω

Signal Characteristics

Gain (Max)	2.4 dB
Frequency Band	915 MHz
Nominal Frequency Range	902 – 930
Peak Gain	0 < 3 dBi

Body Features

Product Weight	6.26 g[.22081 oz]
----------------	-------------------



Mechanical Attachment

Polarization	Linear
Mounting Type	Stud/Screw/Lug Mount

Dimensions

Product Width	10.4 mm[.41 in]
Product Length	50.5 mm[1.99 in]
Product Height	0 mm[0 in]

Operation/Application

Antenna Environment	Outdoor
Directionality	Omnidirectional

Industry Standards

Wireless Application	LoRaWAN, LPWAN, Wi-Fi
Primary Application	LoRaWAN, LPWAN

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Not Yet Reviewed
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the

product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts



TE Part # ANT-916-CHP-T
Antenna Chip 916MHz SMT T&R



TE Part # ANT-916-JJB-RA
Antenna Mini R-Angle 916MHz THM




TE Part # ANT-916-JJB-ST
Antenna Mini Straight 916MHz THM


Customers Also Bought



TE Part #MS563702BA03-50
2 BAR INDUSTRIAL ALTIMETER SENSOR

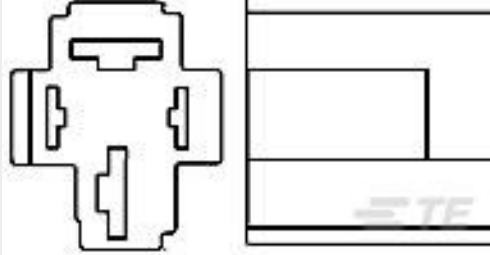

TE Part #1393310-4
VCF7-1000=FROM SEC

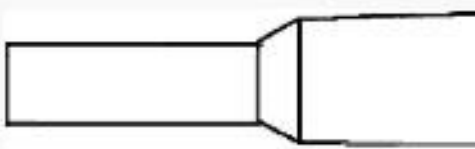

TE Part #1-966066-5
FER,WIRE,PL SLV,6.00/10,L12,BLACK,LP



TE Part #ANT-433-CW-HW
Antenna 1/4 Wave Whip 433MHz RPS LP




TE Part #ANT-433-CW-QW
Antenna 1/4 Wave Whip 433MHz



TE Part #ANT-433-PW-LP
Antenna 1/4 Wave 433MHz Screw #10



TE Part #ANT-868-CW-HW
Antenna 1/2 Wave Whip 868MHz RPS



TE Part #ANT-868-CW-QW
Antenna 1/4 Wave Whip 868MHz



TE Part #ANT-868-PW-LP
Antenna 1/4 Wave 868MHz Screw #10



TE Part #ANT-916-CW-QW
Antenna 1/4 Wave Whip 916MHz

Documents

Datasheets & Catalog Pages

[ANT-916-PW-LP](#)

English

