

June 2015

Multilayer Low Pass Filter

For 470-710MHz

DEA200710LT-1238A1

2.0x1.25mm [EIA 0805]*

* Dimensions Code JIS[EIA]



The products in this catalog will be or have been stopped production

Discontinue Issue Date	Jun. 3, 2022	
Last Purchase Order Date	Mar. 31, 2023	
Last Shipment Date	Mar. 31, 2024	

Please refer to our Web site about replacement information.




Multilayer Low Pass Filter For 470-710MHz


UITIIAYER LOW PASS FIITER Conformity to RoHS Directive

DEA200710LT-1238A1


SHAPES AND DIMENSIONS








0.20±0.15




Dimensions in mm

■ RECOMMENDED LAND PATTERN

0.35±0.10



EVALUATION BOARD



Line width be designed to match 50Ω characteristic impedance depending on PCB material and thickness.

OROHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. http://product.tdk.com/en/environment/rohs/

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.



DEA200710LT-1238A1

ELECTRICAL CHARACTERISTICS

Item	Frequency Range (MHz)	Min.	Тур.	Max.
Insertion Loss (dB)	470 to 710	_	0.88	1.2
Return Loss (dB)	470 to 710	10	15	~~~
Attenuation (dB)	880 to 960	18	25	
Characteristic Impedance (Ω)			50 (Nominal)	

[•] Ta: +25±5°C

■TEMPERATURE RANGE

Operating temperature	Storage temperature	
(°C)	(°C)	
-40 to +85	-40 to +85	




All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.


DEA200710LT-1238A1

■ FREQUENCY CHARACTERISTICS


□INSERTION LOSS



ATTENUATION




RETURN LOSS



[•] All specifications are subject to change without notice.

[•] Before using these products, be sure to request the delivery specifications.

■ RECOMMENDED REFLOW PROFILE

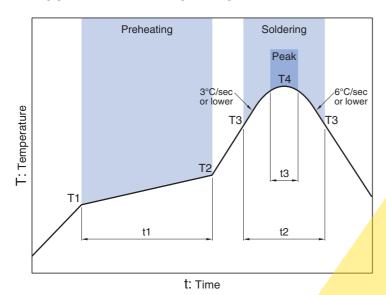

Preheating		Soldering				
		Critical zone (T3 to T4)		Peak		
Temp.		Time	Temp.	Time	Temp.	Time
T1	T2	t1	Т3	t2	T4	t3*
150°C	200°C	60 to 120sec	217°C	60 to 120s	sec 240 to 260°C	30sec max.

*t3: Time within 5°C of actual peak temperature

The maximum number of reflow is 3.

- All specifications are subject to change without notice.Before using these products, be sure to request the delivery specifications.

REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

⚠ REMINDERS

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this catalog.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When using this product in general-purpose applications, you are kindly requested to take into consideration securing protection circuit/ equipment or providing backup circuits, etc., to ensure higher safety.

- All specifications are subject to change without notice.
- Before using these products, be sure to request the delivery specifications.