Available at Digi-Key M100F / V



2111 Comprehensive Drive Aurora, Illinois 60505 Phone: 630-851-4722 Fax: 630-851-5040 www.conwin.com

High Precision TCXO / VCTCXO Oscillators

Description:

The Connor-Winfield M100, M170, and M200 models offer precise frequency stability and excellent phase noise in a 5x3.2mm package.

Through the use of analog

temperature compensation, these TCXO's and VCTCXO's are capable of holding sub 100 ppb and 200ppb stabilities over the commercial or industrial temperature ranges.

Applications:

Basestation	
DSL / ADSL	
IP Timing	
Precision GPS	
WiMAX / WiBro	

Communications Femtocell LTE SONET / SDH WLAN



Models: M100, M170, M200 Series

- Package: 5 x 3.2mm, 8 Pads
- Frequencies Available: 10, 12.288, 12.8, 19.2, 19.44, 20.0, 24.576, or 40.0 MHz

CONNO


VINFI

- 3.3 Vdc Operation
- Output Logic: LVCMOS
- Frequency Stability: M100: ±100 ppb, 0 to 70°C M170: ±100 ppb -20 to 70°C M200: ±200 ppb, -40 to 85°C
- Fixed Frequency TCXO
- Optional Control Voltage VCTCXO
- Low Jitter <0.50 ps RMS
- Low Phase Noise
- Tape and Reel Packaging
- RoHS Compliant / Lead Free <a>RoHS

Absolute Maximum Ratings

Parameter	Minimum	Nominal	Maximum	Units	Notes
Storage Temperature	-40	-	85	°C	
Supply Voltage (Vcc)	-0.5	-	4.6	Vdc	
Input Voltage (Vc)	-0.5	-	Vcc + 0.5	Vdc	



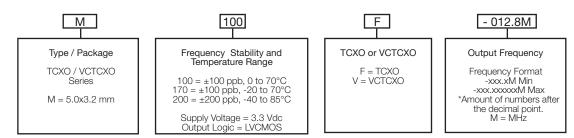

Example: Part Number

M100F-012.8M = 5x3.2mm package, ±100 ppb, 0 to 70 ℃, 3.3 Vdc, LVCMOS Output, TCXO, 12.8 MHz M100V-019.2M = 5x3.2mm package, ±100 ppb, 0 to 70 ℃, 3.3 Vdc, LVCMOS Output, VCTCXO, 19.2 MHz M200F-010.0M = 5x3.2mm package, ±200 ppb, -40 to 85 ℃, 3.3 Vdc, LVCMOS Output, TCXO, 10 MHz M200V-020.0M = 5x3.2mm package, ±200 ppb, -40 to 85 ℃, 3.3 Vdc, LVCMOS Output, VCTCXO, 20 MHz



Bulletin	Tx382
Page	1 of 4
Revision	05
Date	02 March 2023



2111 Comprehensive Drive Aurora, Illinois 60505 Phone: 630-851-4722 Fax: 630-851-5040

www.conwin.com

Parameter	Minimum	Nominal	Maximum	Units	Notes
Output Frequency (Fo)	10.0, 12.288, 12	2.8. 19.2. 19.44. 2	20.0, 24.576, 40.0	MHz	
Frequency Calibration @ 25 °C	-1.0		1.0	ppm	1
Frequency Stability		ering Information	for full part number)		
Model M100x and M170x	-100	-	100	ppb	2
Model M200x	-200	-	200	ppb	2
Frequency vs. Load Stability	-0.20	-	0.20	ppm	±5%
Frequency vs. Voltage Stability	-0.20	-	0.20	ppm	±5%
Static Temperature Hysteresis	-	-	0.40	ppm	3
Freq. shift after reflow soldering	-1.0	_	1.0	ppm	4
Long Term Stability	-1.0	_	1.0	ppm	5
Aging				pp	0
per Life (20 Years)	-3.0	-	3.0	ppm	
per Day	-40	-	40	pph	
per Second	-	4.63E-13	-	pps	
Operating Temperature Range	(See Ord		for full part number)		
Model M100x	0	-	70	°C	
Model M170x	-20	_	70	°Č	
Model M200x	-40	_	85	°Č	
Supply Voltage (Vcc)	3.135	3.30	3.465	Vdc	
Supply Current (Icc)	-	-	3.3	mA	
Jitter:			0.0	111/ \	
Period Jitter	_	3.0	5.0	ps RMS	
Integrated Phase Jitter	_	0.5	1.0	ps RMS	6
SSB Phase Noise for Fo=12.8 MHz		0.0	1.0	p3 1100	0
@ 10 Hz offset	_	-90	_	dBc/Hz	
@ 100 Hz offset	_	-120	_	dBc/Hz	
@ 1 KHz offset	-	-140	-	dBc/Hz	
@ 10 KHz offset	-	-153	-	dBc/Hz	
@ 100 KHz offset	-	-154	-	dBc/Hz	
@ 1 MHz offset	-	-154	-	dBc/Hz	
SSB Phase Noise for Fo=19.2MHz	-	-104	-	UDC/IIZ	
@ 10 Hz offset		-90		dBc/Hz	
@ 100 Hz offset	-	-90	-	dBc/Hz	
	-		-		
@ 1 KHz offset	-	-135	-	dBc/Hz	
@ 10 KHz offset @ 100 KHz offset	-	-151	-	dBc/Hz	
	-	-154	-	dBc/Hz	
@ 1 MHz offset	-	-155	-	dBc/Hz	
Start-Up Time	-	-	10	ms	
(Control Voltage Inp	ut Characteris	stics		
Parameter	Minimum	Nominal	Maximum	Units	Note

Parameter	Minimum	Nominal	Maximum	Units	Notes
Control Voltage	0.3	1.65	3.0	V	
Frequency Pullability	±10	-	-	ppm	
Control Voltage Slope		Positive Slope			
Monotonic Linearity	-	-	10	%	
Input Impedance	100K	-	-	Ohm	
Modulation Bandwidth (3dB)	10	-	-	KHz	
	LVCMOS Output	Characteristic	s		
Parameter	Minimum	Nominal	Maximum	Units	Notes
Load (CL)	-	15	-	pF	7
Voltage (High) (Voh)	90%Vcc	-	-	Vdc	
(Low) (Vol)	-	-	10%Vcc	Vdc	
Duty Cycle at 50% of Vcc	45	50	55	%	
Rise / Fall Time 10% to 90%	-	4	8	ns	
				Bulletin	Tx382
				Page	2 of 4
				Revision	05
				Date	02 March 2023

© Copyright 2023 The Connor-Winfield Corporation Not intended for life support applications.



2111 Comprehensive Drive Aurora, Illinois 60505 Phone: 630-851-4722 Fax: 630-851-5040 www.conwin.com

Package Characteristics

Package Hermetically sealed ceramic package with grounded metal cover

Package Terminations: 0.5 to 1.0 um (20 to 40 micro-inches) Gold over minimum of 2.0 um (80 micro-inches) Nickel

Environmental Characteristics

Vibration:	Vibration per Mil Std 883E Method 2007.3 Test Condition A.
Shock:	Mechanical Shock per Mil Std 883E Method 2002.4 Test Condition B.
Soldering Process:	RoHS compliant lead free. See soldering profile on page 4.

Notes:

- 1. Initial calibration @ 25°C. ±2°C, for VCTCXO's Vc = 1.65V. Specifications at time of shipment after 48 hours of operation.
- 2. Frequency stability vs. change in temperature. [±(Fmax-Fmin)/2.Fo]. For VCTCXO's Vc -= 1.65V
- 3. Frequency change after reciprocal temperature ramped over the operating range. Frequency measured before and after at 25°C

Marking

Configuration

Part Numb

-Date Cod

Frequency

Part Numbe

Date Code

Frequency

Crystal Lot Mar

YYWW


XXXX YYWW XXXXXX -


XXXXX

CW


XXXX ~

- 4. Two consecutive reflows after 1 hour recovery @ 25°C.
- 5. Frequency drift over 1 year @ 25°C.
- 6. BW = 12 KHz to Fo/2
- 7. Attention: To achieve optimal frequency stability, and in some cases to meet the specification stated on this data sheet, it is required that the circuit connected to this TCXO output must have the equivalent input capacitance that is specified by the nominal load capacitance. Deviations from the nominal load capacitance will have a graduated effect on the stability of approximately 20 ppb per pF load difference.






Package Outline for 40.0 MHz






Marking Configuration



Suggested Pad Layout (all package outlines)



* Do not route any traces in the keep out area. It is recommended the next layer under the keep out area is to be ground plane.

Pad Connections (all package outlines)

1:	VCTCXO: Control Voltage (Vc) TCXO: N/C
2:	Do Not Connect
3:	Do Not Connect
4:	Ground
5:	Output
6:	Do Not Connect
7:	Do Not Connect
8:	Supply Voltage (Vcc)


Bulletin	Tx382
Page	3 of 4
Revision	05
Date	02 March 2023

Specifications subject to change without notification. See Connor-Winfield's website for latest revision. © Copyright 2023 The Connor-Winfield Corporation Not intended for life support applications.



2111 Comprehensive Drive Aurora, Illinois 60505 Phone: 630-851-4722 Fax: 630-851-5040 www.conwin.com

-Ò

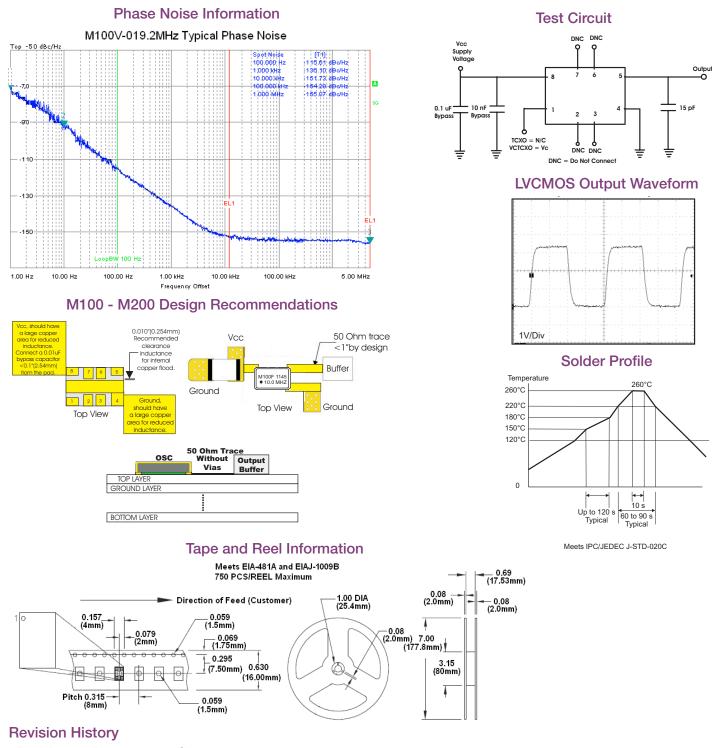

Revision	Date	Changes
00	10/31/12	Data sheet released
01	09/02/14	Phase Noise Plot and Specifications Update
02	03/25/15	Updated Frequencies & Alternate Package
03	12/06/17	Added 19.44MHz to available frequency list.
04	10/09/19	Added package and marking options, and updated tape and reel.
05	03/02/23	Updated frequency listing for the different package outlines.

Bulletin	
Bulletin	Tx382
Page	4 of 4
Revision	05
Date	02 March 2023

Specifications subject to change without notification. See Connor-Winfield's website for latest revision.

© Copyright 2023 The Connor-Winfield Corporation Not intended for life support applications.