

Issue 03.2023

EA W240-6 GRAPHIC

240x64 INCL. CONTROLLER RA6963



FEATURES

- * HIGH CONTRAST SUPERTWIST LC-DISPLAY
- * EVEN WITH TOUCH PANEL AVAILABLE
- * CONTROLLER RA6963 OR T6963C COMPATIBLE INTEGRATED
- * READY MADE FOR 8-BIT DATA BUS
- * BUILT IN CHARACTER SET
- * TEXT AND GRAPHIC CAN BE DISPLAYED SIMULTANOUSLY
- * SELF DEFINABLE CHARACTER SET
- * POWER SUPPLY +5V, typ. 50mA (W./O. BACKLIGHT)
- * OPERATING TEMPERATURE -20..+70°C / CFL-TYPE: 0 ... +50°C

ACCESSORIES

- * FRONTAL BEZEL EA 017-10UKE
- * HIGH-LEVEL-GRAPHICCONTR. WITH RS-232 AND BUILT IN INTELLIGENCE: EA IC6963-PGH

ORDERING INFORMATION

LCD-GRAPHIC MODULE 240x64 DOTS, LED BACKLIGHT Y/G
NEGATIVE BLUE WITH CFL-BACKLIGHT
NEGATIVE BLUE WITH LED-BACKLIGHT
EA W240-6K2HC
EA W240-6K2HLW

WITH TOUCH PANEL AND LED BACKLIGHT Y/G
WITH TOUCH PANEL, NEGATIVE BLUE, CFL-BEL.
WITH TOUCH PANEL, NEGATIVE BLUE, LED-BEL.

EA W240-6K2HCTP
EA W240-6K2HLWTP

3-PIN SOCKET FOR CFL-/LED-WHITE EA G-3KRAG

READY MADE CONTROLUNIT WITH RS-232AND GRAPHIC FUNCTIONS: EAKIT240-6



LC-DISPLAYSERIES EA W240-6K2

This graphics display series features a resolution of 240x64 dots. All displays are with STN supertwist technology. 3 different backlights are available:

- **EA W240-6K2LED** comes with a yellow/green LED backlight. Display looks yellow/green with black characters. Backlight requires typ. 500mA at 4.1V. The limit the current an additional series resistor is required (e.g. for 5V: R = $(5V-4.1V) / 0.5A = 1.8\Omega$). It can be placed as R17 and R18 direct on display pcb. If J16 is shorted, backlight can be powered via pin 3 (VDD) and 20 (cathode LED). Life time if backlight is 100,000 hours.
- **EA W240-6K2HC** comes with CFL backlight. Display is blue with white characters (negative image). Driving the CFL backlight requires a CFL inverter like **EA CXA-E005W**. Life time of backlight depends on application with 10,000 up to 30,000 h. Current consumption is typ. 200mA@5V.
- **EA W240-6K2HLW** comes with white LED backlight. Display is blue with white characters (negative image). This kind of backlight requires max. 120mA (+25°C) at 3.0~3.6V. For operation a current source or external resistor is required. For temperatures above 25°C please consider a derating.

CONTROLLER RA6963 BUILT-IN

All modules do have a built in controller RA6963 which is compatible to T6963. It is made für direct connection to 8-Bit data bus. It features a comfortable command set. For examlpe there's a complete character set built in that can be enlarged with some new characters or even completely exchanged by a new character set. There are attributes for the character like "invers", "blink" or "invisible".

Graphic mode provides up to 4 pages in display memory (8kB). Text and graphic layers can be mixed with "and-", "or-", "exor-" function.

PINOUT

| Pin | Symbol | Function | | | | |
|------|--------|--|--|--|--|--|
| 1 | FG | Frame Ground | | | | |
| 2 | GND | Ground Potential for logic (0V) | | | | |
| 3 | VDD | Power supply for logic (+5V) | | | | |
| 4 | VEE | Operating voltage for LC driving (input) | | | | |
| 5 | WR | L: Data Write | | | | |
| 6 | RD | L: Data Read | | | | |
| 7 | CE | Enable signal (falling edge) | | | | |
| 8 | C/D | L: Data input H: Command input | | | | |
| 9 | VO | Output voltage for LC driving (ca9V) | | | | |
| 10 | RST | L: Reset | | | | |
| 1118 | DB07 | Data Bus Line | | | | |
| 19 | FS | Font Select L: 8x8 Font H: 6x8 Font | | | | |
| 20 | NC | not connected | | | | |

| Technische Daten | | | | | | | | |
|------------------|---------|-----|--------|--------------|--|--|--|--|
| Spezifikation | min | typ | max | Einheit | | | | |
| On-Widerstand | 300 | | 10.000 | Ω | | | | |
| Spannung | 0,5 | | 5 | V | | | | |
| Schaltstrom | 10u | | 10m | Α | | | | |
| Betätigungskraft | 150 | | 200 | g | | | | |
| Kontaktprellen | | 10 | | ms | | | | |
| Temperaturber. | -30 | | +75 | °C | | | | |
| Lehensdauer | 1000000 | | | Schaltsniele | | | | |

column. The example below shows a touch on filed 30 which makes a contact for pin 3 and 11. Contact resistance is between 300Ω and $10k\Omega$ pressure and field count. Please note that there is a parasitic capacity of around 100pF between all lines and columns. Maximum driving voltage is 5V.


TOUCH PANEL

All display modules are available with built in touch panel, too. This is a resitive matrix touch. Using thia touch can be done by finger or pen. Surface is anti-glare and hard coated. Function is like standard matrix keyboard with 12x4 keys. Touch one of these 48 areas makes a contact between a line and a

| | Zuordnung Feld-Nr zu Pin | | | | | | | | | | | |
|-----|--------------------------|----|----|----|----|----|----|----|----|----|----|----|
| Pin | 16 | 15 | 14 | 13 | 12 | 11 | 10 | 9 | 8 | 7 | 6 | 5 |
| 1 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| 2 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 |
| 3 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 |
| 4 | 37 | 38 | 39 | 40 | 41 | 42 | 43 | 44 | 45 | 46 | 47 | 48 |


CONTRAST ADJUSTMENT

All modules do have a built in automatic contrast adjustment with temperature compensation. So there's only the need to adjust the contrast while production. Contrast will be held in optimum over the whole range of operating temperature.






EA W240-6K2LED

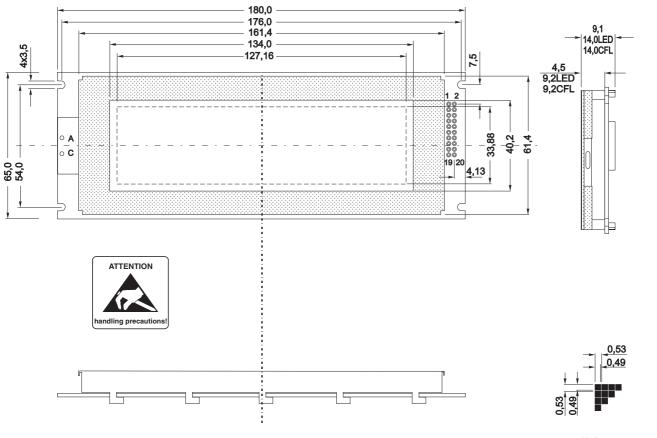


all dimensions are in mm

EA W240-6K2LEDTP with Touch Panel

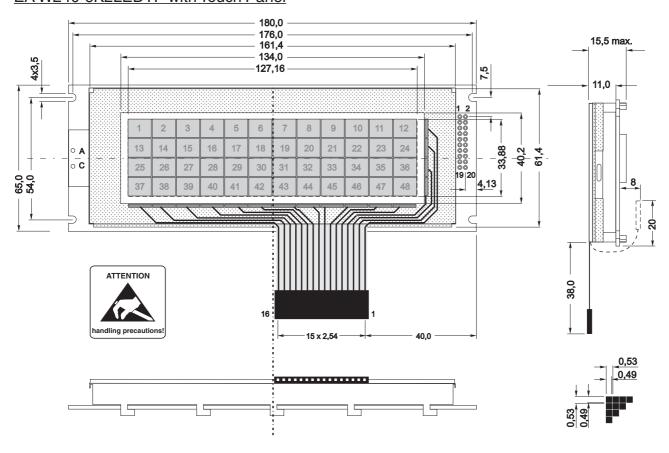


EA W240-6K2HC / -6K2HLW

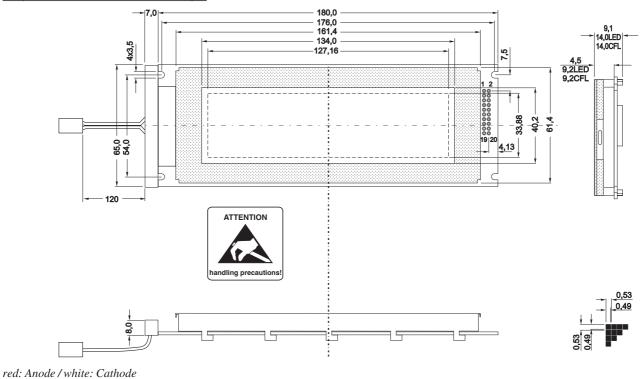

all dimensions are in mm

EA W240-6K2HCTP / -6K2HLWTP with Touch Panel

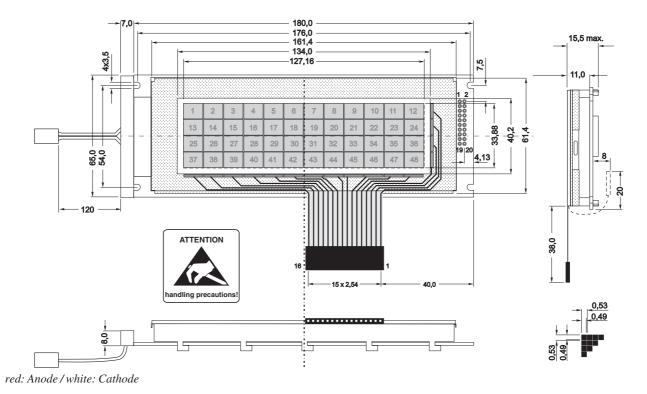

DISPLAY VISIONS GmbH Zeppelinstraße 19 D-82205 Gilching Germany Fon: +49 (0)8105-778090 Fax: +49 (0)8105-778099 e-Mail: info@lcd-module.de Web: www.lcd-module.com

