

Obsolete

M.C.C.

Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

Features

- Case Material:Molded Plastic. UL Flammability Classificatio Rating 94-0 and MSL Rating 1
- Internal Short Circuit Current Limiting
- Internal Thermal Overload Protection
- No External Components Required
- Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information)

Absolute Maximum Ratings


Parameter	Symbol	Value	Unit
Input Voltage	V_1	30	V
Operating Junction Temperature	T_{OPR}	-30---+75	°C
Storage Temperature Range	T_{STG}	-40---+125	°C

Electrical Characteristics($V_i=15V, I_o=40mA, 0^\circ C < T_j < 125^\circ C, C_1=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

Parameter	Sym	Min	Typ	Max	Test conditions
Output Voltage	V_o	8.64V	9.0V	9.36V	$V_i=15V, I_o=40mA$
Load Regulation	$V_o - I_o$		12mV	90mV	$I_o=1mA-100mA, V_i=15V$
Line regulation	$V_o - V_i$		27mV	200mV	$12.5V \leq V_i \leq 24V, I_o=40mA$
Quiescent Current	I_q		3.5mA	6.0mA	$V_i=15V, I_o=40mA$
Output Noise Voltage	V_N		210µV		$10Hz \leq f \leq 100KHz, V_i=15V, I_o=40mA$
Ripple Rejection	RR	37dB	64dB		$12V \leq V_1 \leq 22V, I_o=40mA, f=120Hz, T_j=25^\circ C, e_{IN}=1V_{P-P}$

*Note: Bypass Capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators


Typical Application:

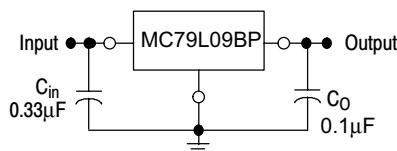

MC79L09BP

Three-Terminal Low Current Negative Voltage Regulator

TO-92

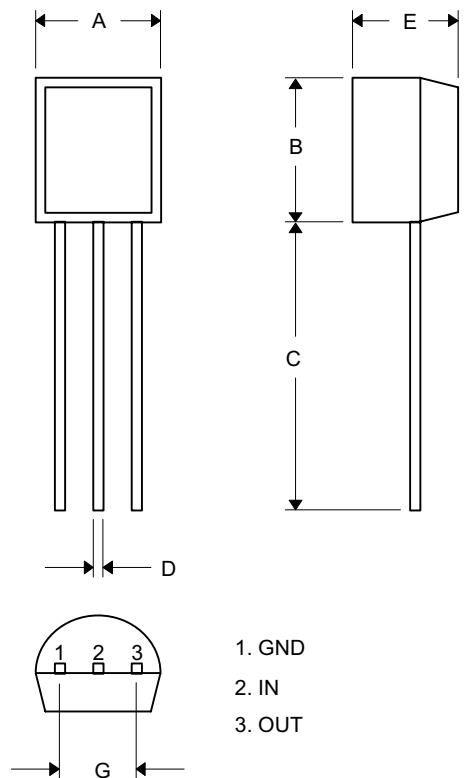

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	.175	.185	4.45	4.70	
B	.175	.185	4.46	4.70	
C	.500	---	12.7	---	
D	.016	.020	0.41	0.63	
E	.135	.145	3.43	3.68	
G	.095	.105	2.42	2.67	



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-AP	Ammo Packing;2Kpcs/AmmoBox
(Part Number)-BP	Bulk;1Kpcs/Bag

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.

www.mccsemi.com