




N FEMALE
PER MIL-STD-348,
FIGURE 304-2

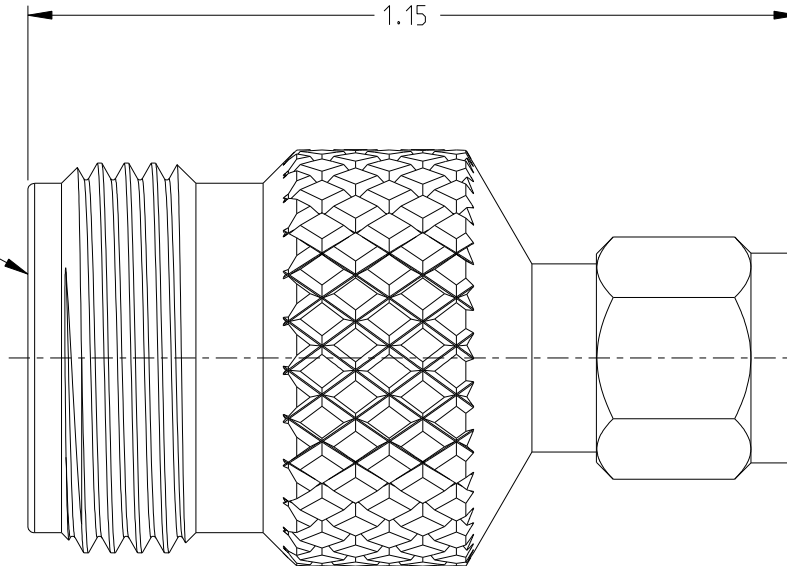

SMA MALE
PER MIL-STD-348,
FIGURE 310-1

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIALS AND FINISH
 - 1.1 HOUSING: NICKEL PLATED BRASS
 - 1.2 CENTER CONTACT: GOLD PLATED BERYLLIUM COPPER
 - 1.3 INSULATOR: PTFE
2. ELECTRICAL SPECIFICATIONS
 - 2.1 FREQUENCY RANGE: DC TO 10 GHz
 - 2.2 IMPEDANCE: 50 OHMS NOMINAL
 - 2.3 VSWR (MAX): 1.20:1

 <small>cinch CONNECTIVITY SOLUTIONS</small>		MIDWEST MICROWAVE	
	<small>NOTICE: The information in this drawing is PROPRIETARY and must not be used without the permission of Cinch Connectivity Solutions. It may contain data whose export is restricted. Verify status prior to exporting.</small>	RoHS2 <input checked="" type="checkbox"/> <small>2015/863/EU</small>	<small>Title:</small> N FEMALE TO SMA MALE ADAPTER
<small>UNLESS OTHERWISE SPECIFIED UNITS: INCH</small>	<small>Model No.</small> CGM-1100-NF-SMM-10	<small>Size</small> A	<small>Date:</small> 12/5/2022
<small>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2018</small>	<small>.XX ±.02 FRACTIONS ±1/64 ANGLES ±2°</small>	<small>DO NOT SCALE DRAWING</small>	<small>Sheet</small> 1 OF 1