








PART No.	CODE No.		A	B	C	D	E
FX8- 60P-SV1(92)	CL578-0041-0-92	60	24.6	23	20.7	17.4	22.2
FX8- 80P-SV1(92)	CL578-0043-6-92	80	30.6	29	26.7	23.4	28.2
FX8- 90P-SV1(92)	CL578-0044-9-92	90	33.6	32	29.7	26.4	31.2
FX8-100P-SV1(92)	CL578-0045-1-92	100	36.6	35	32.7	29.4	34.2
FX8-120P-SV1(92)	CL578-0046-4-92	120	42.6	41	38.7	35.4	40.2
FX8-140P-SV1(92)	CL578-0047-7-92	140	48.6	47	44.7	41.4	46.2

4	POLYESTER	(TOP COVER TAPE)	2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.			
3	POLYSTYRENE	(EMBOSSSED CARRIER TAPE)			LEAD AREA:TIN-PLATING 1μm min.			
1	PPS	LIGHT BROWN(UL94V-0)			UNDER PLATING:NICKEL1μm min.			
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE FREE		COUNT 2	DESCRIPTION OF REVISIONS DIS-F-006743	DESIGNED CR. TAKESHIMA	CHECKED HT. YAMAGUCHI	DATE 13. 04. 16
 HIROSE ELECTRIC CO. , LTD.		APPROVED :KJ. KATAYOSE	05. 01. 05	DRAWING NO.	EDC3-150727-22			
		CHECKED :HS. OKAWA	05. 01. 05	PART NO.	FX8-*P-SV1(92)			
		DESIGNED :KT. DOI	05. 01. 05	CODE NO.				
		DRAWN :KT. DOI	05. 01. 05	 				

Aug.1.2023 Copyright 2023 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

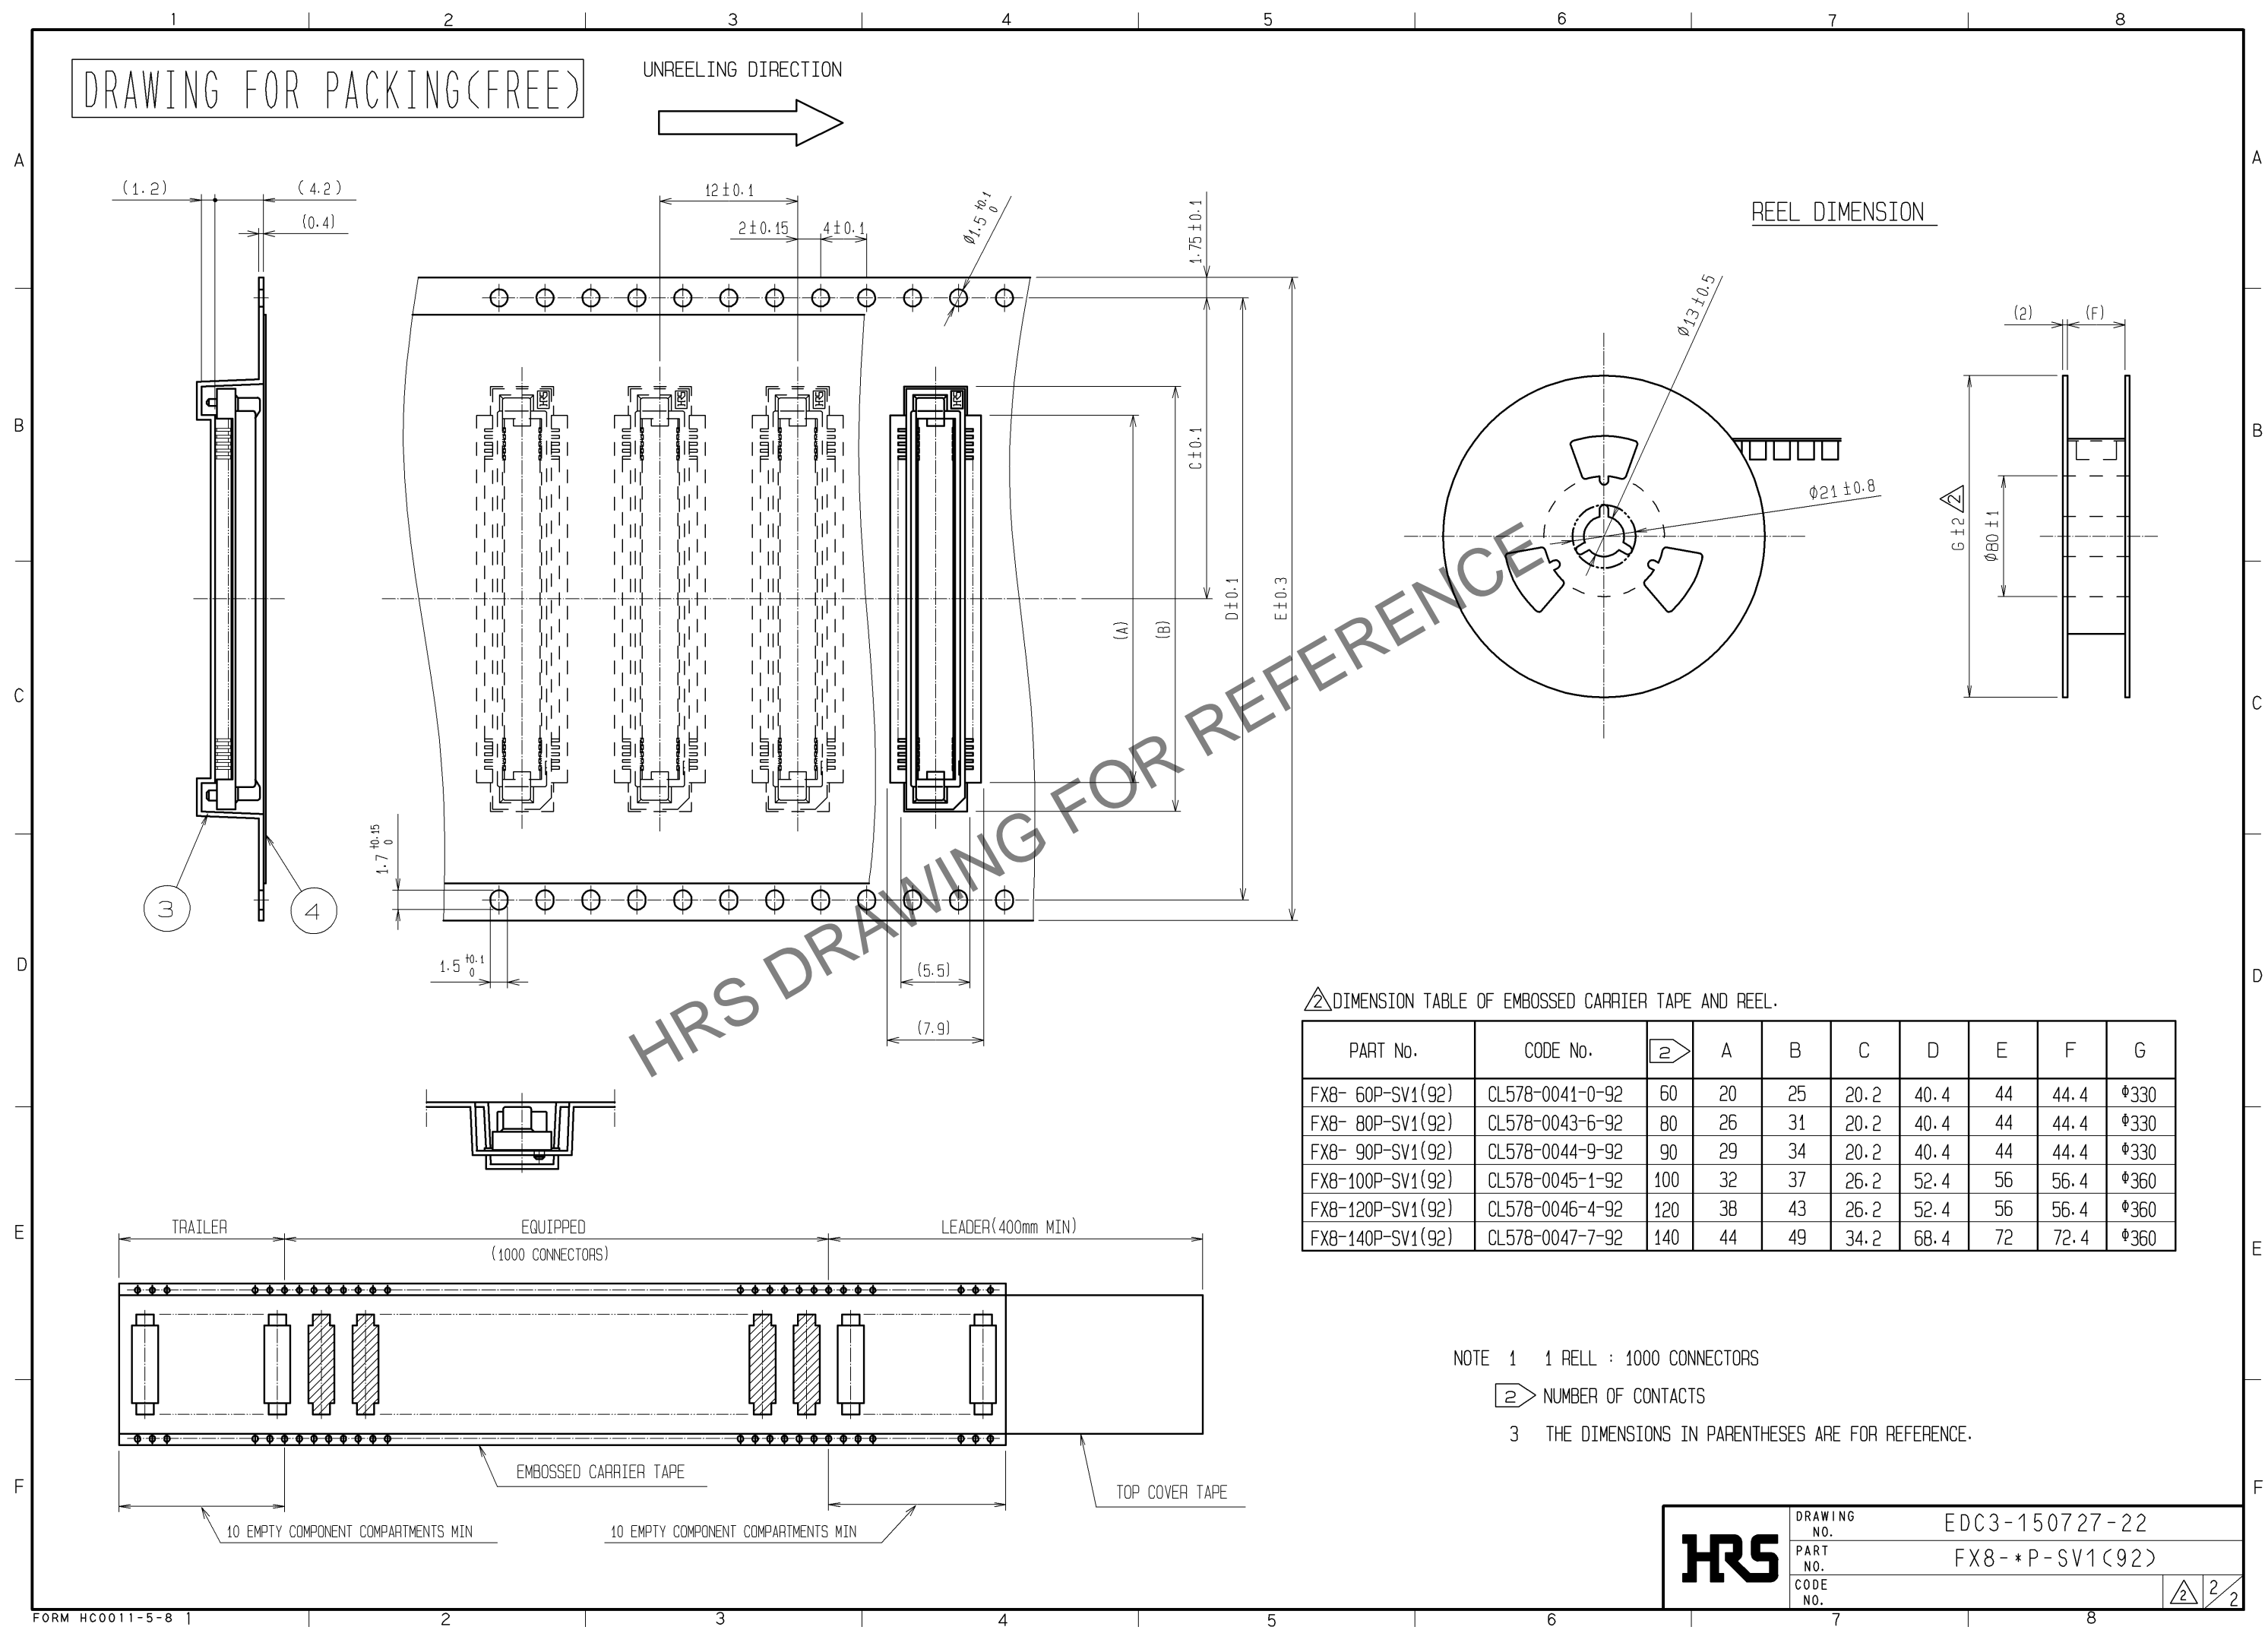

HRS	DRAWING NO.	EDC3-150727-22	
	PART NO.	FX8- * P- SV1(92)	
	CODE NO.		