

# Data sheet

## 1153.3 TK 4/3/F OG



Transformer terminal, Screw connection + spade connection Mounting type: Custom profile, Rated cross-section: 4 mm², Width: 7.5 mm, Colour: Orange

### Business data

Article number	1153.3
Article name	TK 4/3/F OG
GTIN (EAN)	4044211022563
Packaging unit	20
Quantity unit	PC
Weight per piece (not including packaging)	15 g
Weight per piece (including packaging)	15.21 g
Unit of weight	G
Customs number	85369010
Country of origin	CZ
Prio-Article	1153.3
Product description	Transformer terminal

# Data sheet

## 1153.3 TK 4/3/F OG

### Technical data

#### Dimensions

Length	27.8 mm
Width	7.5 mm
Height	33.1 mm

#### Ratings

Rated voltage	800 V
Rated current	32 A
Rated cross-section	4 mm <sup>2</sup>
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3
Maximum power dissipation for nominal condition	3.07 W

#### Connection data

Connection principle	Screw connection + spade connection
Connections	6
Spade connection	6,3/2 x 2,8 x 0,8 mm
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	6 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	6 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	4 mm <sup>2</sup>
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	10
Stripping length	9 mm
Screw head	Slotted
Screw threading	M 3
Tightening torque, min.	0.5 Nm
Tightening torque, max.	1 Nm

# Data sheet

## 1153.3 TK 4/3/F OG



### Technical data

#### Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

#### Further technical data

Mounting type	Custom profile
Gauge plug acc. to EN 60 947-1	A4

#### Environmental Product Compliance

REACH Candidate Substance Note	No
--------------------------------	----

### Approvals

#### Standards and regulations

EAC approval	TR ZU 004/2011
EAC approval granted	yes

#### cUL Recognized

cUL approval	C22.2 No 158
cUL Usegroup B: rated voltage	600 V
cUL Usegroup B: rated current	30 A
cUL Usegroup C: rated voltage	600 V
cUL Usegroup C: rated current	30 A
cUL wire cross-section single-core (rigid) AWG, min.	22
cUL wire cross-section single-core (rigid) AWG, max.	10
cUL wire cross-section stranded AWG, min.	22
cUL wire cross-section stranded AWG, max.	10
cUL torque	7 Nm
cUL wire material	Cu
cUL Recognized	1

#### KEMA KEUR approval


KEMA KEUR approval	EN 60947-7-1:2009
KEMA KEUR approval granted	yes
KEMA rated voltage	800 V
KEMA rated current	32 A
KEMA rated impulse voltage (fuse holder without electrical components)	8 kV
KEMA wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
KEMA wire cross-section single-core (rigid), max.	6 mm <sup>2</sup>
KEMA wire cross-section stranded, min.	0.2 mm <sup>2</sup>
KEMA wire cross-section stranded, max.	6 mm <sup>2</sup>
KEMA torque, min.	0.5 Nm
KEMA torque, max.	1 Nm

**Approvals**

**UL Recognized**

UL approval	UL 1059
UL Usegroup B: rated voltage	600 V
UL Usegroup B: rated current	30 A
UL Usegroup C: rated voltage	600 V
UL Usegroup C: rated current	30 A
UL wire cross-section single-core (rigid) AWG, min.	22
UL wire cross-section single-core (rigid) AWG, max.	10
UL wire cross-section stranded AWG, min.	22
UL wire cross-section stranded AWG, max.	10
UL torque, max.	7 Lb In.
UL wire material	Cu
UL factory wiring	1
UL field wiring	1
UL Recognized	1

Media

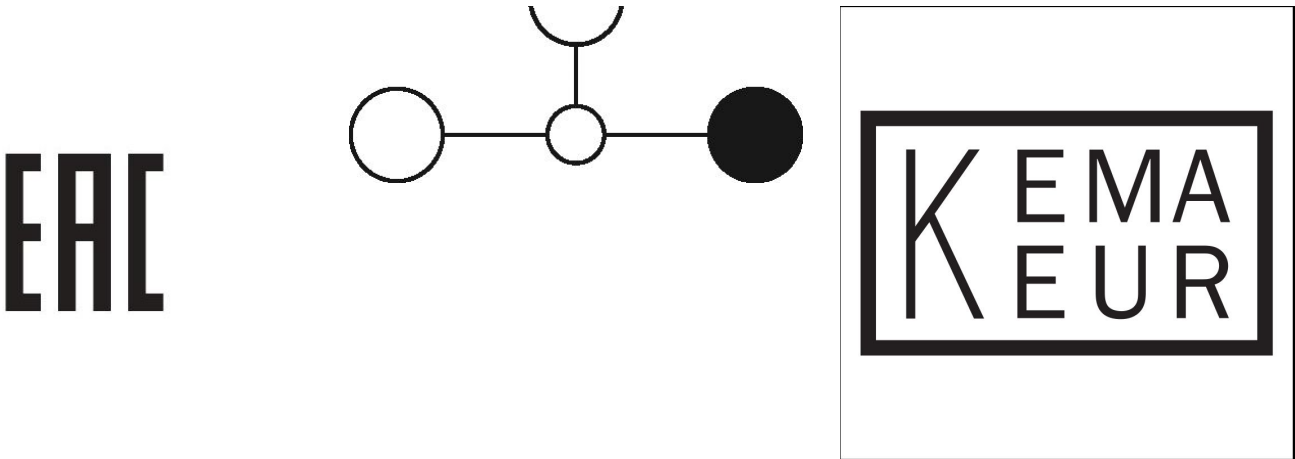

Accessories

Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 7.5 mm, Colour: White

Article number	Article name	GTIN (EAN)	Packaging unit
<u>9326.7</u>	PMC SB 7,5/40 WH	4044211157784	400 ST



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 7.5 mm, Colour: White

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3327.7</u>	PMC SB 7,5/40 So WH	4044211128845	400 ST

Screwdriver

Screwdriver with bare blade, Colour: Black-grey



Article number	Article name	GTIN (EAN)	Packaging unit
<u>1086.0</u>	SDB 0,6x3,5	4044211014797	1 ST