

# Data sheet

## 15473.2 WE-10DI



Webeasy I/O digital input module, 10 digital inputs 24VAC/DC with LED display, Mounting type: Mounting rail TS 35, Supply voltage range: 20 V - 28 VAC/DC

### Business data

Article number	15473.2
Article name	WE-10DI
GTIN (EAN)	4044211124175
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	121 g
Weight per piece (including packaging)	161 g
Unit of weight	G
Customs number	85423190
Country of origin	NL
Product description	Controller module

### Technical data

#### BUS data

Bus-Topologie / Kabellänge max.	multidrop line / 500m
Datenübertragungsrate / Bus-Teilnehmer max.	19k2 bps / 64
Bus protocol / interface	Modbus RTU / RS485, halb duplex, nicht isoliert

#### Dimensions

Length	95 mm
Width	53 mm
Height	60 mm

#### Connection data

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Stripping length	6 mm
Torque	0.4 Nm


#### Environmental Product Compliance










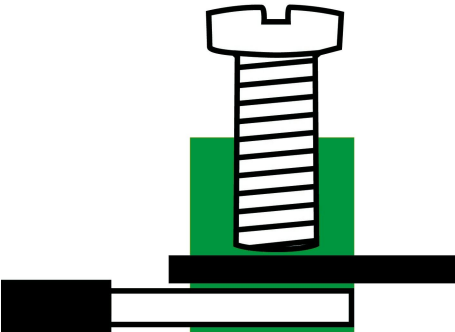




REACH Conform	yes
REACH Reference date	2023-06-14
REACH Candidate Substance Note	No
RoHS Conform	yes

# Data sheet

## 15473.2 WE-10DI

### Media



1	2	3	4	5	+	+	+	+		
 Gn Rd	 Gn Rd	 Gn Rd	 Gn Rd	 Gn Rd						
 A1	WE-10DI				INTERNAL BUS				A1	-C
 A2									A2	-C
 A									A	-C
 B									B	-C
 Gn Rd	 Gn Rd	 Gn Rd	 Gn Rd	 Gn Rd						
6	7	8	9	10	-	-	-	-		

---

**Accessories**

---