


## Specification Sheet

Part Number: 157-00366

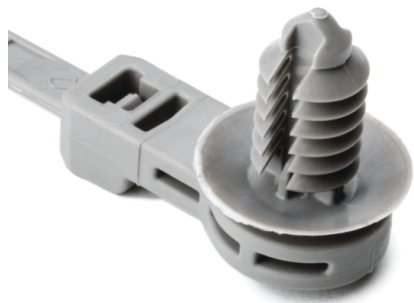

Off-Set design allows bundles to sit off of mounting points to avoid friction against surrounding areas.

Fir tree gives 3 to 1 extraction versus insertion force making them strong and easy to install.

Friction tab inside of fir tree allows tie to sit in mount without falling out prior to installation.

1-Pc Cable Tie/Fir Tree Mount w/Disc, 12.5mm Offset, 8.5"L, 6.1-7mm Hole, PA66HIRHS, Gray, 3000/ctn

Article Number 157-00366

Type T50ROSFT6SO12.5A

Color Gray (GY)

Quantity Per bag

Product Description HellermannTyton's Off-Set Fir Tree Cable Tie and fixing offers a simple and easy to use method of bundling and fixing cables, the design of the fir tree ensures a positive and secure fixing into panels with thicknesses from .2" - .26" or threaded blind holes. The 'disc' on the top of the fir tree covers the hole and minimizes the ingress of water and dirt.

Short Description 1-Pc Cable Tie/Fir Tree Mount w/Disc, 12.5mm Offset, 8.5"L, 6.1-7mm Hole, PA66HIRHS, Gray, 3000/ctn

Global Part Name T50ROSFT6SO12.5A-PA66HIRHS-GY

Minimum Tensile Strength (Imperial) 50.0

Minimum Tensile Strength (Metric) 225.0

Length L (Imperial) 8.5

Length L (Metric) 215.9

Offset Length (Imperial) 0.49

Offset Length (Metric) 12.5

Fixation Method Fir Tree

Identification Plate Position none

Releasable Closure No

Width W (Imperial) 0.19

Width W (Metric) 5.1

Bundle Diameter Min (Imperial) 0.08

Bundle Diameter Min (Metric) 2.0

Bundle Diameter Max (Imperial) 1.97

Bundle Diameter Max (Metric) 50.0

|   |  |
|---|--|
| Height H (Imperial)                     | 0.87   |
| Panel Thickness Min (Imperial)          | 0.02   |
| Panel Thickness Max (Imperial)          | 0.26   |
| Panel Thickness Min (Metric)            | 0.6  |
| Panel Thickness Max (Metric)            | 6.65   |
| Mounting Hole Diameter D (Imperial)     | 0.24 - 0.28 ";0.24 - 0.26  |
| Mounting Hole Diameter D (Metric)       | 6.1 - 7.0 mm 6.35 mm (hexagonal)                                 |
| Mounting Hole Diameter D Min (Imperial) | 0.24   |
| Mounting Hole Diameter D Max (Imperial) | 0.28 ";0.26  |
| Mounting Hole Diameter D Max (Metric)   | 7.0  |
| Disc Diameter (Metric)                  | 15.0   |
| Disc Diameter (Imperial)                | 0.59   |
| Material                                | Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS) |
| Material Shortcut                       | PA66HIRHS  |
| UV Resistant (Yes/No)                   | No   |

Operating Temperature -40°F to +230°F (-40°C to +110°C)

Reach Compliant (Article 33) No

ROHS Compliant Yes

Package Quantity (Imperial) 3000

Package Quantity (Metric) 3000

Customs Number 3926909988

## About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. ([www.hellermann.tyton.com](http://www.hellermann.tyton.com)).

© 2023 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)