

Data sheet

3532.2 ZIZA 1,5/3/PE GNYE



Initiator terminal / actuator terminal, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 1.5 mm², Width: 51 mm, Colour: Green-yellow

Business data

Article number	3532.2
Article name	ZIZA 1,5/3/PE GNYE
GTIN (EAN)	4044211058777
Packaging unit	20
Quantity unit	PC
Weight per piece (not including packaging)	10 g
Weight per piece (including packaging)	11 g
Unit of weight	G
Customs number	85369010
Country of origin	CZ
Product description	Initiator terminals / actuator terminals
Colour	Green-yellow

Technical data

Dimensions

Length	68.7 mm
Width	51 mm
Height TS 35/7.5	40.5 mm
Pitch	5 mm

Ratings

Rated cross-section	1.5 mm ²
Overvoltage category	III
Contamination degree	3

Connection data

Connection principle	Tension-spring connection
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.5 mm ²
Wire cross-section single core (rigid)/stranded, max.	2.5 mm ²
Wire cross-section stranded, min.	0.5 mm ²
Wire cross-section stranded, max.	2.5 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.5 mm ²
Wire cross-section stranded with wire-end ferrules, max.	1.5 mm ²
Wire cross-section AWG, min.	26
Wire cross-section AWG, max.	14
Stripping length	8 mm

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

Further technical data

Mounting type	Mounting rail TS 35/7,5
Gauge plug acc. to EN 60 947-1	A1
End plate required	✓
PE connection available	✓

Data sheet

3532.2 ZIZA 1,5/3/PE GNYE



Technical data

Environmental Product Compliance

REACH Conform	yes
REACH Reference date	2023-06-14
REACH Candidate Substance Note	No
RoHS Conform	yes

Approvals

CSA approval

CSA approval	C22.2 No 158
CSA approval granted	yes
CSA wire cross-section AWG, min.	26
CSA wire cross-section AWG, max.	14
CSA stripping length	8 mm

CSAus approval

CSAus approval	UL 1059
CSAus approval granted	yes
CSAus wire cross-section AWG, min.	26
CSAus wire cross-section AWG, max.	14
CSAus stripping length	8 mm

cUL Recognized

cUL approval	C22.2 No 158
cUL wire cross-section single-core (rigid) AWG, min.	26
cUL wire cross-section single-core (rigid) AWG, max.	14
cUL wire cross-section stranded AWG, min.	26
cUL wire cross-section stranded AWG, max.	14
cUL wire material	Cu
cUL Recognized	1

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1:2009, EN 60947-7-2:2009
KEMA KEUR approval granted	yes
KEMA wire cross-section single core (rigid), min.	0.5 mm ²
KEMA wire cross-section single-core (rigid), max.	2.5 mm ²
KEMA wire cross-section stranded, min.	0.5 mm ²
KEMA wire cross-section stranded, max.	2.5 mm ²

Approvals



UL Recognized

UL approval	UL 1059
UL wire cross-section single-core (rigid) AWG, min.	26
UL wire cross-section single-core (rigid) AWG, max.	14
UL wire cross-section stranded AWG, min.	14
UL wire cross-section stranded AWG, max.	26
UL wire material	Cu
UL factory wiring	1
UL field wiring	1
UL Recognized	1

DNV GL Approval


DNV GL Certificate number	TAE00000Y9
DNV GL Location Classes	Temperature: B, Humidity: B, Vibration: A
DNV GL approval granted	1
DNV GL rated cross-section	1.5 mm ²
DNV GL rated current	17,5 A
DNV GL rated voltage	400 V
DNV GL test standard	IEC 60947-7-1:2009, IEC 60947-7-2:2009
DNV GL wire cross-section single-core (rigid), max.	2.5 mm ²
DNV GL wire cross-section stranded, max.	1.5 mm ²

Media

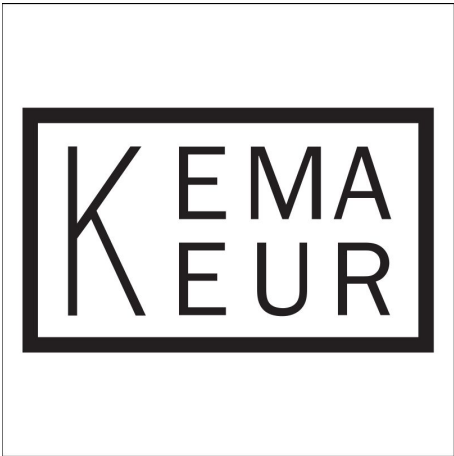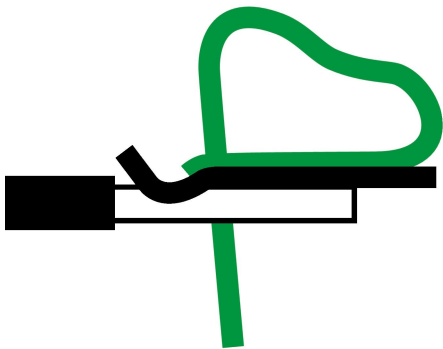

Accessories

End plate



End plate, Width: 5.1 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3746.2</u>	ZAP/TW ZIZA 1,5/3 BG	4044211060558	20 ST

End stop



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 6 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3748.2</u>	ZES 35 BG	4044211060572	50

Potential distribution strip



Potential distribution strip, Tension-spring connection, Mounting type: Plug in, Rated cross-section: 1.5 mm², Width: 8.7 mm, Colour: Green-yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3743.2</u>	ZPL 1,5/PE GNYE	4044211060527	100 ST

Test adapter



Test adapter, Pitch size: 5.1 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>17034.2</u>	ZTA 1,5	4044211155452	10 ST

Quick marking

3532.2 ZIZA 1,5/3/PE GNYE



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 5 mm, Colour: White

Article number	Article name	GTIN (EAN)	Packaging unit
<u>4600.7</u>	PMC SB 5/50 WH	4044211088903	500 ST

Screwdriver



Screwdriver with bare blade, Colour: Black-grey

Article number	Article name	GTIN (EAN)	Packaging unit
<u>1085.0</u>	SDB 0,5x3,0	4044211014643	1 ST

##INVERSE##CONTA-CONNECT



Potential distribution strip, Tension-spring connection, Mounting type: Plug in, Rated cross-section: 1.5 mm², Width: 8.7 mm, Colour: Red-brown

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3739.6</u>	ZPL 1,5 RB	4044211060480	100



Potential distribution strip, Tension-spring connection, Mounting type: Plug in, Rated cross-section: 1.5 mm², Width: 8.7 mm, Colour: Blue

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3742.5</u>	ZPL 1,5 BU	4044211060510	100 ST



Potential distribution strip, Tension-spring connection, Mounting type: Plug in, Rated cross-section: 1.5 mm², Width: 8.7 mm, Colour: Green-yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3743.2</u>	ZPL 1,5/PE GNYE	4044211060527	100 ST

3532.2 ZIZA 1,5/3/PE GNYE

##INVERSE##CONTA-CONNECT



Potential distribution strip, Tension-spring connection, Mounting type: Plug in, Rated cross-section: 1.5 mm², Width: 8.7 mm, Colour: Yellow

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3791.8</u>	ZPL 1,5 YE	4044211061197	100 ST



Potential distribution strip, Tension-spring connection, Mounting type: Plug in, Rated cross-section: 1.5 mm², Width: 8.7 mm, Colour: Green

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3792.1</u>	ZPL 1,5 GN	4044211061203	100 ST



Potential distribution strip, Tension-spring connection, Mounting type: Plug in, Rated cross-section: 1.5 mm², Width: 8.7 mm, Colour: Orange

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3793.3</u>	ZPL 1,5 OG	4044211061210	100 ST



Potential distribution strip, Tension-spring connection, Mounting type: Plug in, Rated cross-section: 1.5 mm², Width: 8.7 mm, Colour: Beige

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3738.2</u>	ZPL 1,5 BG	4044211060473	100 ST

##INVERSE##CONTA-CONNECT



Potential distribution strip, Tension-spring connection, Mounting type: Plug in, Rated cross-section: 1.5 mm², Width: 8.7 mm, Colour: Blue

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3742.5</u>	ZPL 1,5 BU	4044211060510	100 ST

##INVERSE##CONTA-CONNECT

3532.2 ZIZA 1,5/3/PE GNYE



Potential distribution strip, Tension-spring connection, Mounting type: Plug in, Rated cross-section: 1.5 mm², Width: 8.7 mm, Colour: Red-brown

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3739.6</u>	ZPL 1,5 RB	4044211060480	100

##INVERSE##CONTA-CONNECT



Potential distribution strip, Tension-spring connection, Mounting type: Plug in, Rated cross-section: 1.5 mm², Width: 8.7 mm, Colour: Green

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3792.1</u>	ZPL 1,5 GN	4044211061203	100 ST

##INVERSE##CONTA-CONNECT



Potential distribution strip, Tension-spring connection, Mounting type: Plug in, Rated cross-section: 1.5 mm², Width: 8.7 mm, Colour: Orange

Article number	Article name	GTIN (EAN)	Packaging unit
<u>3793.3</u>	ZPL 1,5 OG	4044211061210	100 ST

Reducing sleeves

Reducing sleeve, Width: 51 mm, Pitch size: 5.1 mm, Colour: Grey



Article number	Article name	GTIN (EAN)	Packaging unit
<u>3751.6</u>	ZRH 2,5/0,25-0,5 GR	4044211060602	1000 ST

Reducing sleeve, Width: 51 mm, Pitch size: 5.1 mm, Colour: White



Article number	Article name	GTIN (EAN)	Packaging unit
<u>3750.7</u>	ZRH 2,5/0,13-0,2 WH	4044211060596	1000 ST

Reducing sleeves

Reducing sleeve, Width: 51 mm, Pitch size: 5.1 mm, Colour: Black



Article number	Article name	GTIN (EAN)	Packaging unit
3752.4	ZRH 2,5/0,75-1,0 BK	4044211060619	1000 ST