



## PANEL CUT OUT



| REVISIONS |                 |          |          |  |  |  |
|-----------|-----------------|----------|----------|--|--|--|
| REV.      | DESCRIPTION     | DATE     | APPROVED |  |  |  |
| А         | INITIAL RELEASE | 04/23/18 | D.N.     |  |  |  |

|   | inc  | inches |  |  |
|---|------|--------|--|--|
|   | Maxi | mini   |  |  |
| A | .643 | .637   |  |  |
| В | .541 | .535   |  |  |

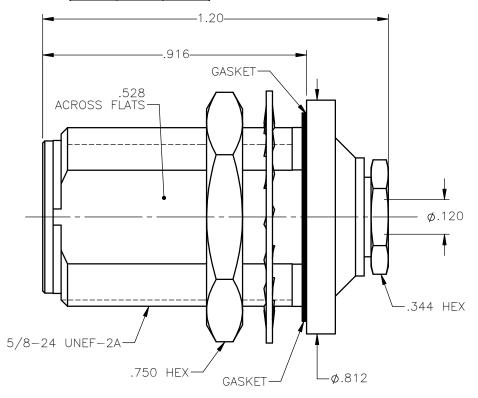

## NOTES:

## MATERIALS:

- 1. INSULATORS = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
  2. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
  3. GASKET = SILICONE RUBBER PER ZZ-R-765, CLASS 2B, GRADE 65-75.
  4. LOCKWASHER = PHOSPHOR BRONZE PER ASTM B139, COPPER ALLOY C53400, TEMPER H04.
  5. ALL OTHER METAL PARTS = BRASS PER ASTM B16, ALLOY C36000, TEMPER H02.

## FINISHES:

- 1. CONTACT = GOLD PLATE PER ASTM B488-11, TYPE II, 50µin MIN, GRADE C, OVER 100 TO 200µin STRESS FREE SULFAMATE NICKEL PER AMS-QQ-N-290.
  2. ALL OTHER METAL PARTS = GOLD PLATE PER ASTM B488-11, TYPE II, 30µin MIN, GRADE C OVER 100 TO 200µin COPPER STRIKE PER AMS 2418.

| UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON DECIMAL ANGLE |   | DWN:         DATE           D.N.         04/23/1           CHKD:         DATE |                    | Property of Radiall  This document cannot be reproduced or communicated to a third party without prior a RADIALL company written permission of RADIALL. |                                  |  |          |
|---|---|---|--------------------|---|----------------------------------|--|----------|
|   |   | C.E. 04/23/1 APVD: DATE J.M. 04/23/1  | 8                  | TYPE "N" JACK BULKHAD REAR MOUNT CLAMP TYPE   |                                  |  |          |
| REFERENCE:  ORIGINATED: D.N. DATE: 04/23/18                                     | • | MATERIALS & FINISHES:<br>SEE NOTES  | SIZE<br>A<br>SCALE | FSCM NO.<br>19505<br>3:1  | DWG NO.  4501—1051—  THIRD ANGLE |  | REV<br>A |