

# XVC6B55SK

Harmony XVC, Monolithic precabled tower light, plastic, red orange green blue clear, Ø60, base mounting, steady or flashing, buzzer, IP54, 24 V AC/DC



## Main

Range of Product	Harmony XVC6
Product or Component Type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	5 illuminated units
Sound signalling	Buzzer
Mounting diameter	2.36 in (60 mm)
Component name	XVC
Light source	LED steady or flashing red LED steady or flashing orange LED steady or flashing green LED steady or flashing blue LED steady or flashing clear
[Us] rated supply voltage	24 V
Supply circuit type	AC/DC
Noise level	70...85 dB continuous or intermittent tone)1 m

## Complementary

Material	Polycarbonate illuminated unit ABS (acrylonitrile butadiene-styrene) base unit PBT + ABS (UL94HB) top cover
Product mounting	On base
Cable cross section	0.00 in <sup>2</sup> (0.33 mm <sup>2</sup> )
AWG gauge	AWG 22
Cable length	33.46 in (850 mm)
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current Consumption	165 mA
Fundamental frequency	2.23 kHz
Flashing frequency	1 Hz
Net Weight	0.88 lb(US) (0.4 kg)
Height	11.06 in (280.8 mm)

## Environment

Standards	EN/IEC 61000-6-3 EN/IEC 61000-6-2 EN/IEC 61000-6-4
Product Certifications	UL
Protective treatment	TC
Ambient Air Temperature for Storage	-31...158 °F (-35...70 °C)
Ambient air temperature for operation	14...122 °F (-10...50 °C)
Electrical shock protection class	Class II EN/IEC 61140
IP degree of protection	IP54 flat surface installation EN/IEC 60529

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Ordering and shipping details

Category	22617 - XVC TOWER LIGHTS
Discount Schedule	XV
GTIN	3606480032738
Nbr. of units in pkg.	1
Package weight(Lbs)	21.31 oz (604 g)
Returnability	No
Country of origin	ID

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	3.39 in (8.6 cm)
Package 1 width	3.35 in (8.5 cm)
Package 1 Length	21.65 in (55 cm)
Unit Type of Package 2	S04
Number of Units in Package 2	6
Package 2 Weight	10.75 lb(US) (4.876 kg)
Package 2 Height	11.81 in (30 cm)
Package 2 width	15.75 in (40 cm)
Package 2 Length	23.62 in (60 cm)
Unit Type of Package 3	PAL
Number of Units in Package 3	48
Package 3 Weight	86.82 lb(US) (39.38 kg)
Package 3 Height	23.62 in (60 cm)
Package 3 width	31.50 in (80 cm)
Package 3 Length	18.90 in (48 cm)

## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>


## Contractual warranty

Warranty	18 months
----------	-----------

Pre-assembled and Pre-wired Tower Light

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

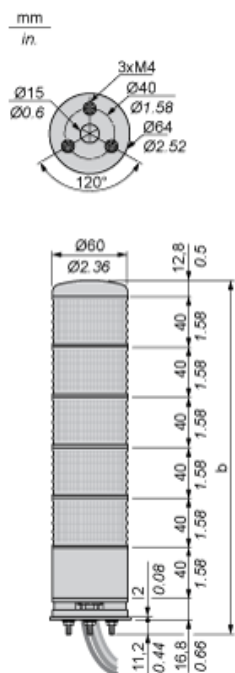

No. of illuminated units	b (mm)	b (in.)
1 stage	120.8	4.76
2 stages	160.8	6.33
3 stages	200.8	7.90
4 stages	240.8	9.48
5 stages	280.8	11.06

---

## Pre-assembled and Pre-wired Tower Light

---

### Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

